


# TEAC<sup>®</sup>

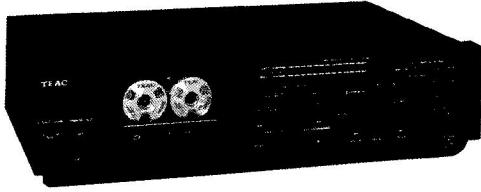

## SERVICE MANUAL

---

# V-530X/V-430X

Stereo Cassette Deck

---

## 1 SPECIFICATIONS AND SERVICE DATA

### 仕様及びサービス・データ

#### Notes:

- Improvements may result in changes in specifications and service data.
- 0 dB is referenced to 0.775V in this manual.

#### SPECIFICATIONS

Track system	4-track, 2-channel stereo
Heads	2: Erase, record/playback
Type of tape	Standard compact cassette, C-60 and C-90
Tape speed	4.76 cm/s (1-7/8 ips)
Input (level and impedance)	
MIC:	Minimum input level: -60 dB (775 $\mu$ V)
LINE IN:	Specified input level: -8 dB (308mV)/50k ohms Minimum input level: -18 dB (97.5mV)
Output (level and impedance)	
OUTPUT:	Specified output level: -3.5 dB (510mV) 50k ohms or more
PHONES:	Specified output level: 50mW/8 ohms
Equalization	
METAL:	3180 $\mu$ S + 70 $\mu$ S
CrO <sub>2</sub> :	3180 $\mu$ S + 70 $\mu$ S
NORMAL:	3180 $\mu$ S + 120 $\mu$ S
Head configuration	
	1/2-track, 1-channel erase head 1/4-track, 2-channel record and playback head
Motors	1 DC servo capstan motor 1 DC reel motor
Bias frequency	85 kHz
Operation position	Horizontal
Power requirements	
	100/120/220/240V AC, 50/60 Hz (General Export Models) 120V AC, 60 Hz (U.S.A./Canada) 220V AC, 50 Hz (Europe) 240V AC, 50 Hz (U.K./Australia) 100V AC 50/60 Hz (Japan)
Power consumption	
	V-530X: 23W (Except Japan), 17W (Japan) V-430X: 18W (Except Japan), 12W (Japan)
Dimensions	See Fig. 1-1 on page 3.
Weight	4.3 kg (9-1/2 lbs) net (V-530X) 3.9 kg (8-5/8 lbs) net (V-430X)

#### CAUTION

△ Parts marked with this sign are safety critical components. They must always be replaced with identical components – refer to the appropriate parts list and ensure exact replacement.

#### 注 意

△印は安全重要部品です。交換する時は必ずティアック指定の部品を使用してください。

#### 注

- 仕様およびサービス・データは改善のため、予告なく変更することがあります。
- 本マニュアルの0 dBは0.775Vを基準としています。

#### SERVICE DATA

#### MECHANICAL

Tape speed deviation	3000 Hz $\pm$ 60 Hz
Tape speed drift	45 Hz
Wow & flutter	
Playback:	0.12% (WRMS)
Pinch roller pressure	370 to 530 g (13 oz to 18.7 oz)
Reel Torque	
Take-up:	30 to 60 g-cm (0.42 to 0.83 oz-inch)
F.F./REW:	Approx. 80 g-cm (1.1 oz-inch)
Fast winding time	95 seconds for MTT-551 (C-60)

#### ELECTRICAL

Frequency response	See Figs. 5-9 to 5-12
Signal-to-noise ratio	
Playback:	NORMAL: 44 dB min. (Linear)
Overall:	METAL, CrO <sub>2</sub> : 49 dB min. (IHFA) NORMAL: 48 dB min. (IHFA)
Erase efficiency	60 dB min. at 1 kHz (measured with input 10 dB higher than the specified input level)
Channel separation	30 dB min. at 1 kHz
Adjacent track crosstalk	60 dB min. at 1 kHz
Third harmonic distortion	
	2.8% or less with Metal 2.5% or less with CrO <sub>2</sub> 2.0% or less with Normal

- Dolby Noise Reduction System manufactured under license from Dolby Laboratories Licensing Corporation. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.
- dbx Noise Reduction system made under license from dbx, Incorporated. The name "dbx" and the dbx symbol are trademarks of dbx, Incorporated.

- ドルビーノイズリダクションシステムは、ドルビー研究所からの実施権に基づき製造されています。
- ドルビー及びDDは、ドルビー研究所の登録商標です。
- dbxおよびdbxマークはdbxインコーポレーテッドの登録商標です。
- dbxシステムはdbxインコーポレーテッドの実施権に基づいて製造されています。

## 2 REMOVAL OF EXTERNAL COMPONENTS

外装部品の外し方

Disassemble in number-order

番号順に外してください

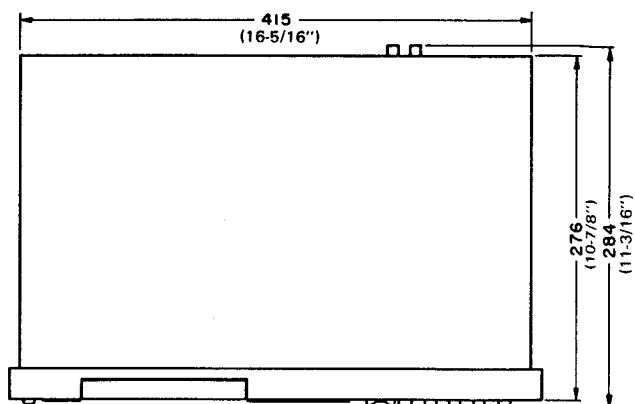
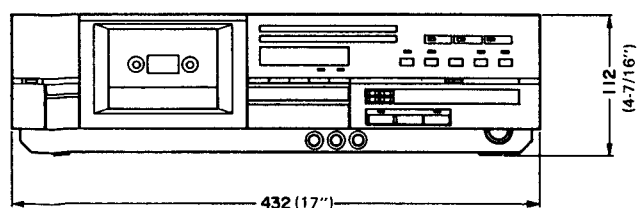
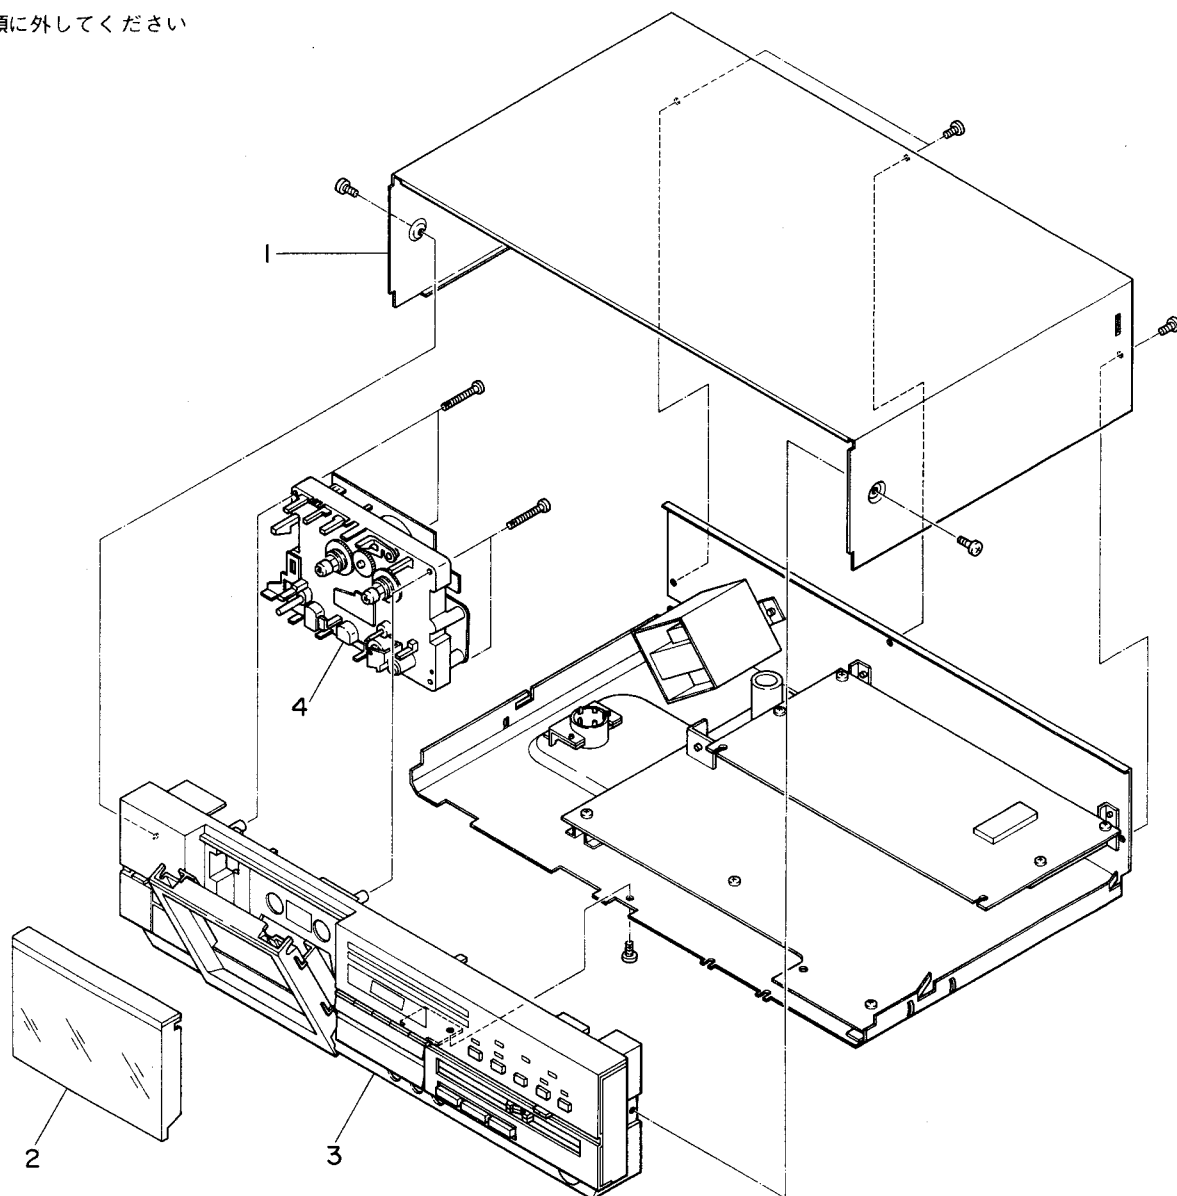


Fig. 1-1

## 3 PARTS LOCATION

### 部品配置図

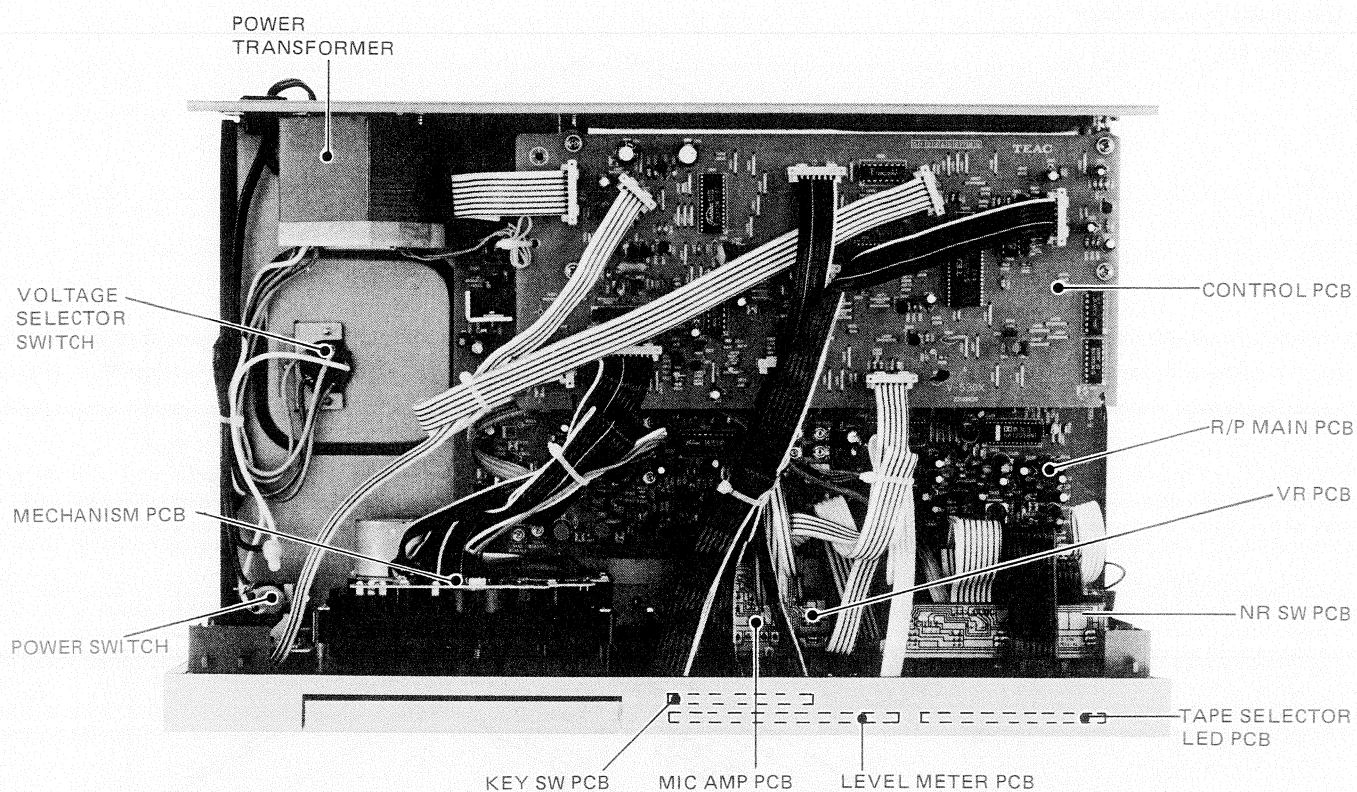


Fig. 3-1 Top view (V-530X) 上面図

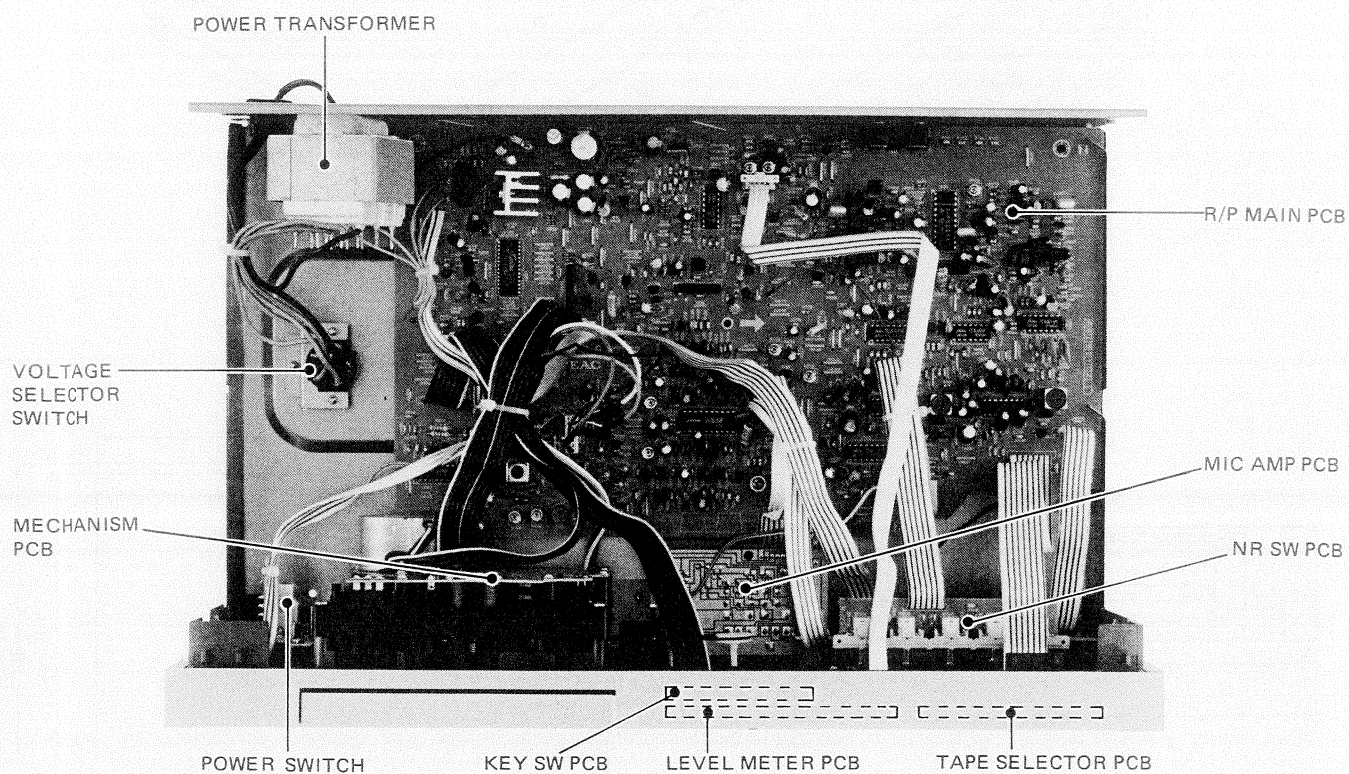


Fig. 3-2 Top view (V-430X) 上面図



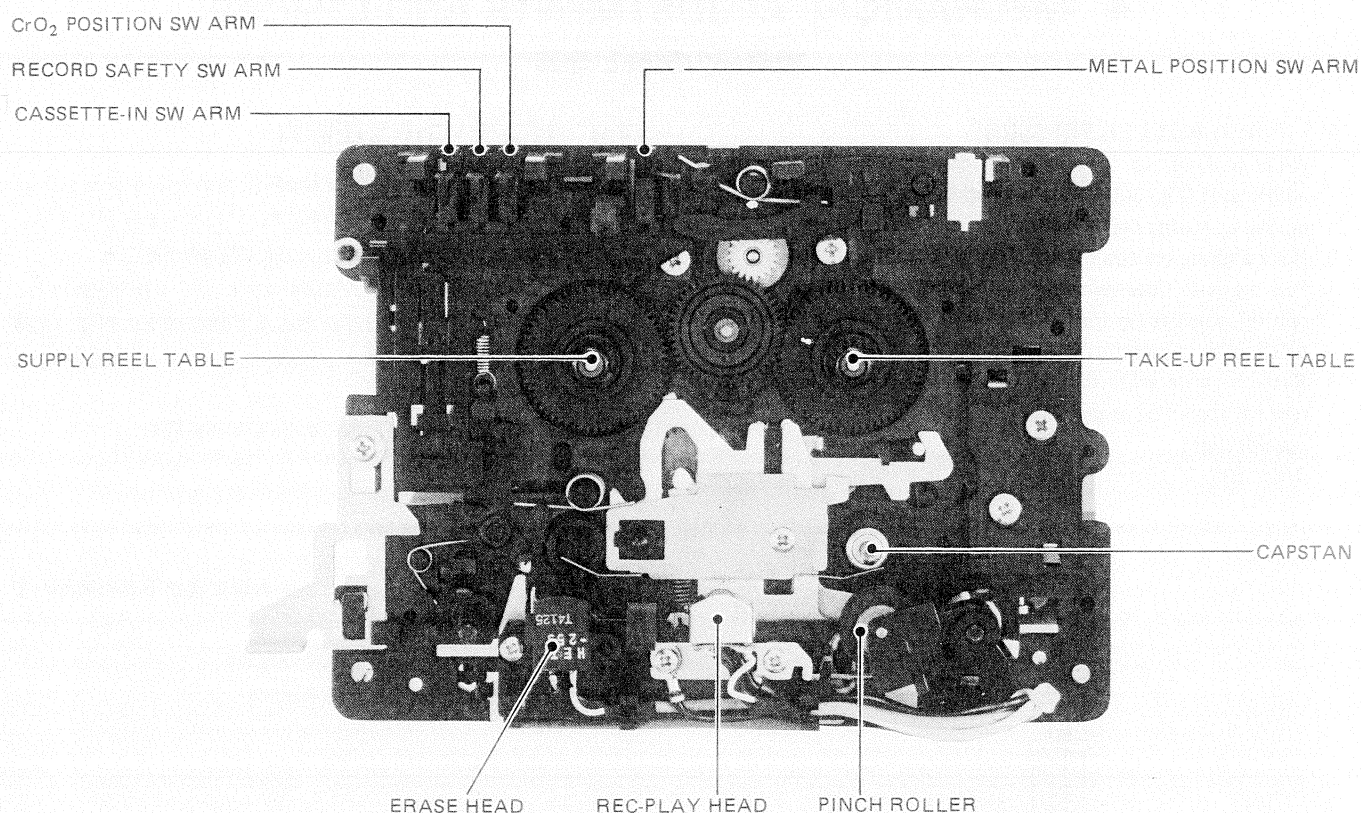


Fig. 3-3 Transport front view (V-530X/V-430X)

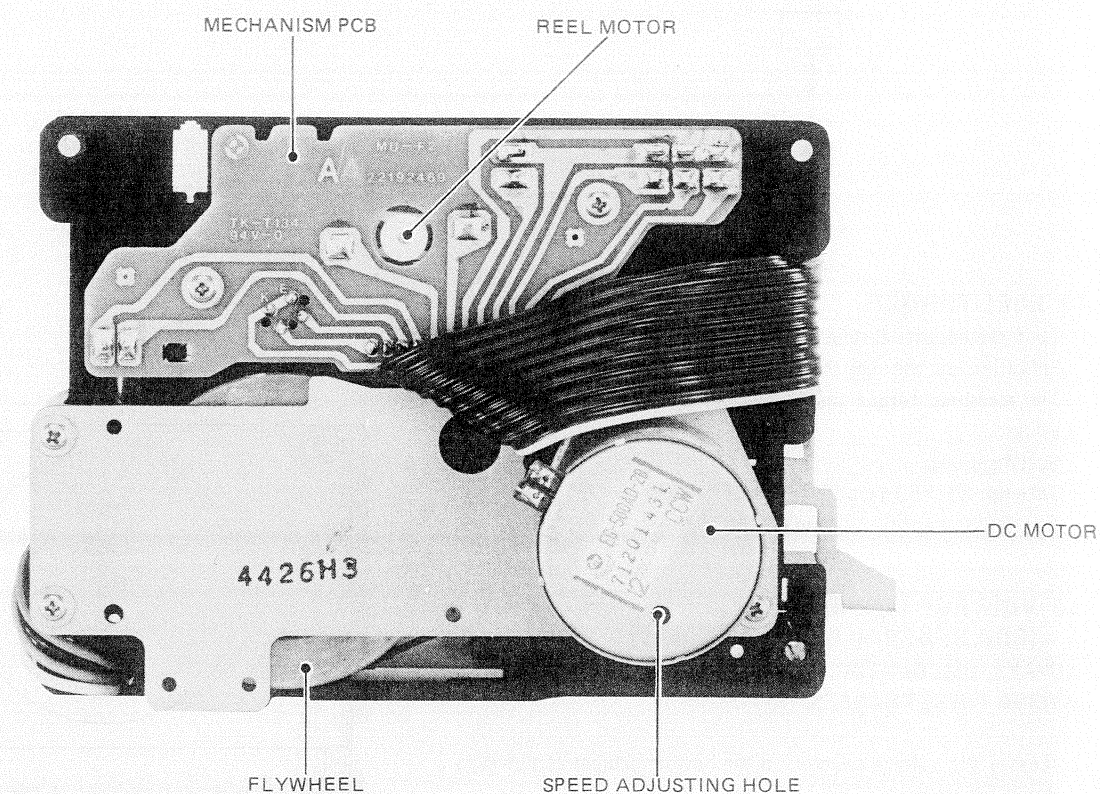


Fig. 3-4 Transport rear view (V-530X/V-430X)

## 4 MECHANICAL ADJUSTMENTS AND CHECKS

### 機構部の調整と確認

#### 4-1 PINCH ROLLER PRESSURE

1. While pushing up the cassette-in SW arm with the cassette holder shut (Fig. 3-3), activate the play mode. Keep the SW arm pushed up during measurement.
2. Hook a spring scale to the pinch roller arm as shown below.
3. Pull the scale downwards until there is sufficient force to separate the pinch roller from the capstan shaft, and then allow the pinch roller to just touch the capstan shaft again.
4. Read the scale when the pinch roller just starts to rotate. The readings should be as specified below.

Specifications:

370 ~ 530g (13.1 ~ 18.7 oz)

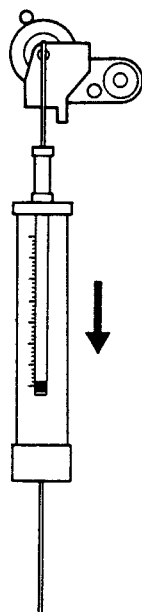


Fig. 4-1

#### 4-1 ピンチ・ローラ圧着力

1. カセット・ホルダを閉じた状態で、カセットイン・スイッチアーム (図3-3) を上方に押して、プレイ・モードにする。測定中、スイッチアームは上方に押し続けること。
2. ピンチ・ローラ・アームに図4-1のようにバネ秤を掛ける。
3. ピンチ・ローラを回転が止まるまで秤を真下に引張った後、ピンチ・ローラが再びキャプスタン・シャフトに接触するように徐々に戻す。
4. ピンチ・ローラが回り始める時の値を読む。  
規格値：370 ~ 530g

#### 4-2 リール・トルク

1. カセット型トルク・メータによる測定値が下表の範囲内であることを確認する。  
テイクアップ・トルク：30 ~ 60g・cm  
早送りトルク：約80g・cm

#### 4-2 REEL TORQUE

1. Load the cassette torque meter on the deck and read the pointer indication on the dial scale for each tape transport operation. The measured torque should be within the following specified values:

Specifications:


Take-up: 30 ~ 60 g-cm (0.42 ~ 0.83 oz-inch)

F.F./REW: Approx. 80 g-cm (2.8 oz-inch)

#### 4-3 VOLTAGE CONVERSION (FOR GENERAL EXPORT MODELS)

**ALWAYS DISCONNECT THE POWER LINE CORD BEFORE MAKING THESE CHANGES.**

1. Locate the voltage selector on the bottom cabinet as shown in the illustration.
2. Using a regular (slot blade) screwdriver, turn the selector so that the desired voltage indication appears.

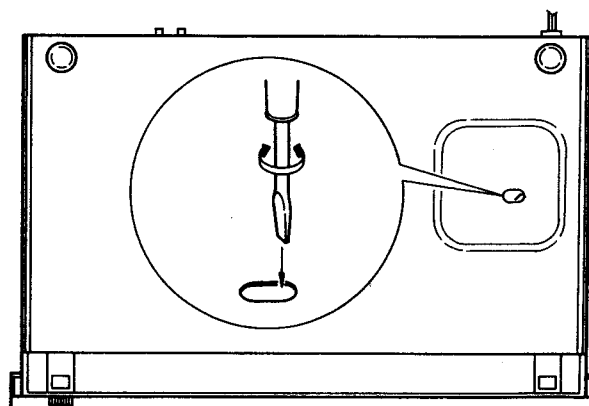

Bottom View

## 5 ELECTRICAL CHECKS AND ADJUSTMENTS

### アンプ部の確認と調整

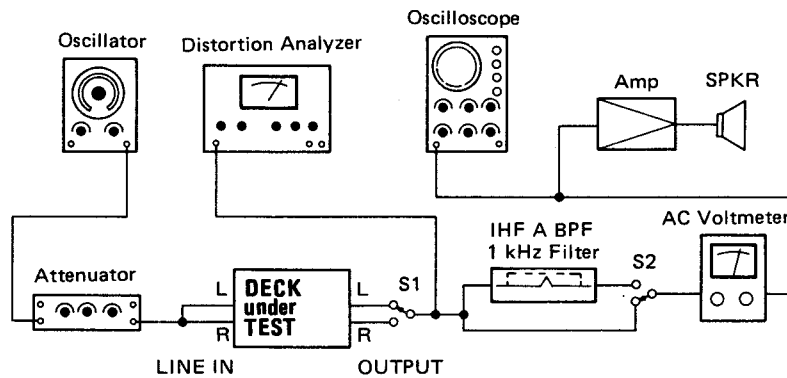


Fig. 5-1 Basic test setup 基本測定接続図

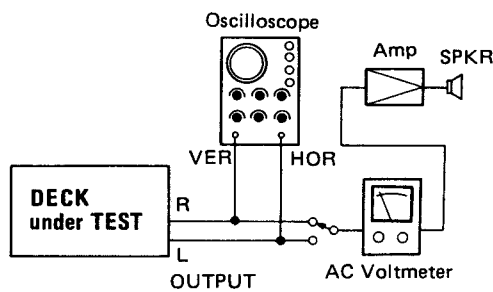


Fig. 5-2 Test setup for azimuth check  
位相測定接続図

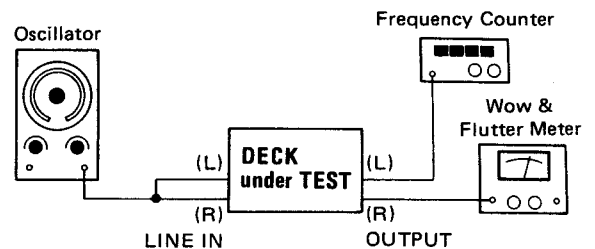


Fig. 5-6 Wow & flutter check  
ワウ・フラッタ・チェック

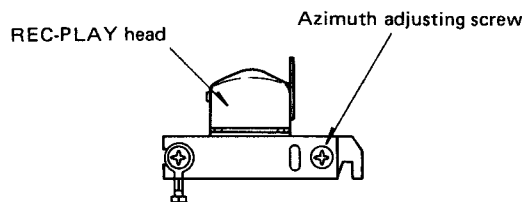


Fig. 5-3 Azimuth screw location  
アジマス調整ネジ

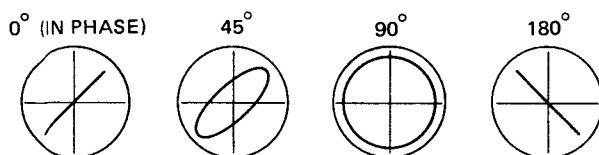


Fig. 5-4 Confirming phase relationship  
位相の確認

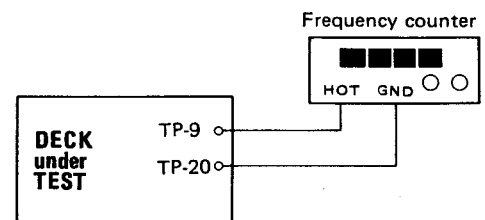


Fig. 5-7 Bias osc. frequency check  
バイアス発振周波数チェック

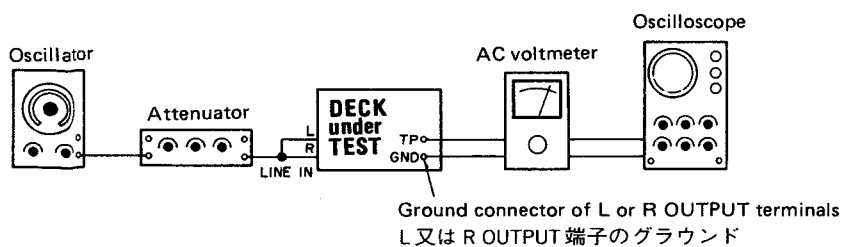


Fig. 5-5 Test setup for items 3 and 6  
3及び6項の場合の接続

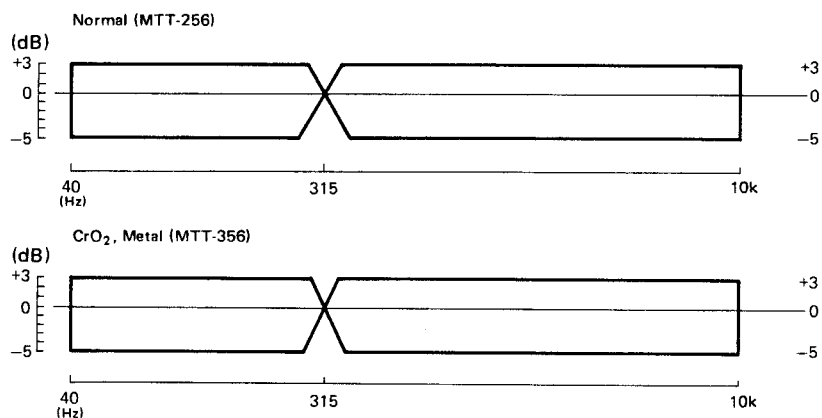


Fig. 5-11 Playback frequency response

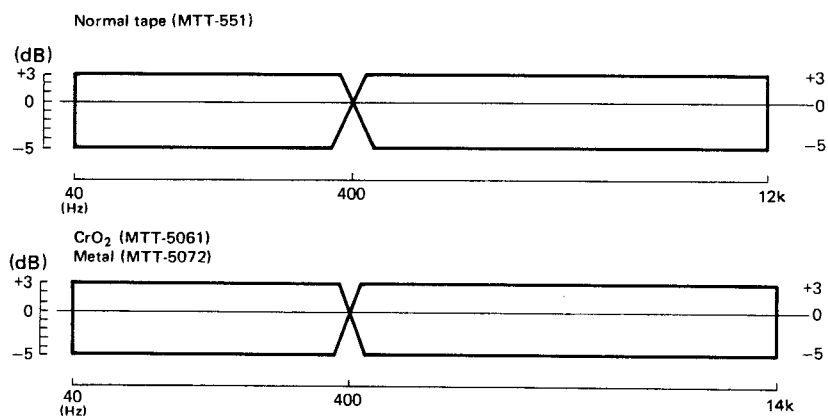


Fig. 5-12 Overall frequency response

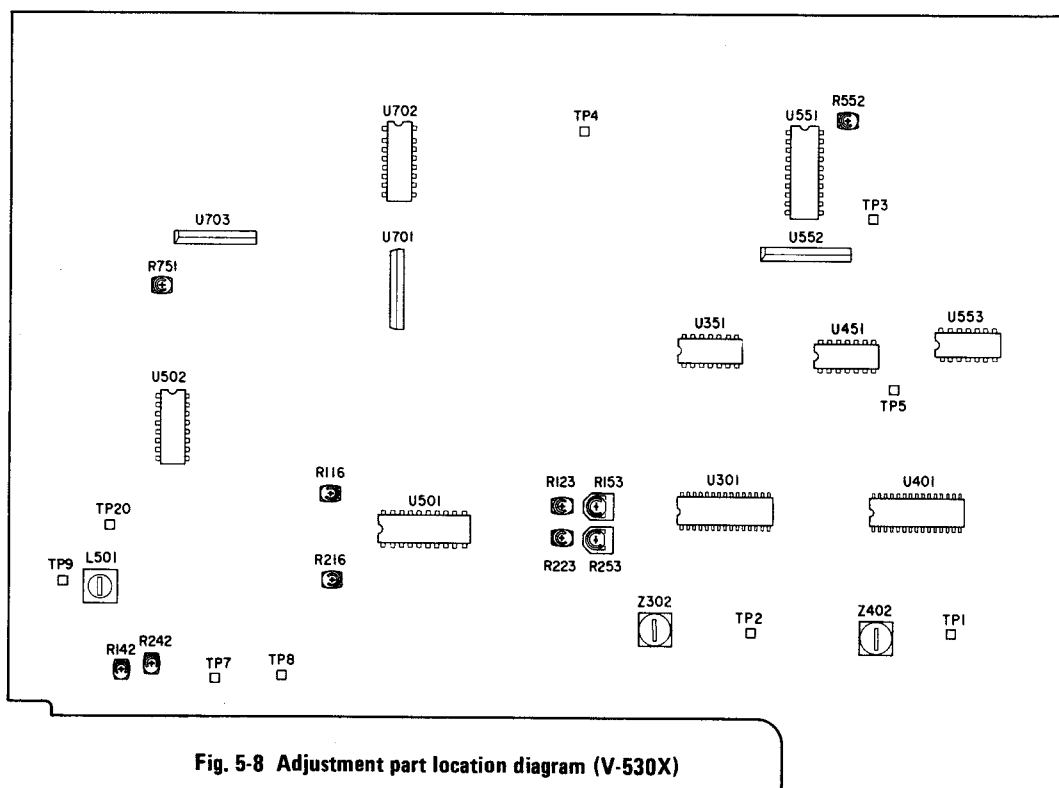


Fig. 5-8 Adjustment part location diagram (V-530X)

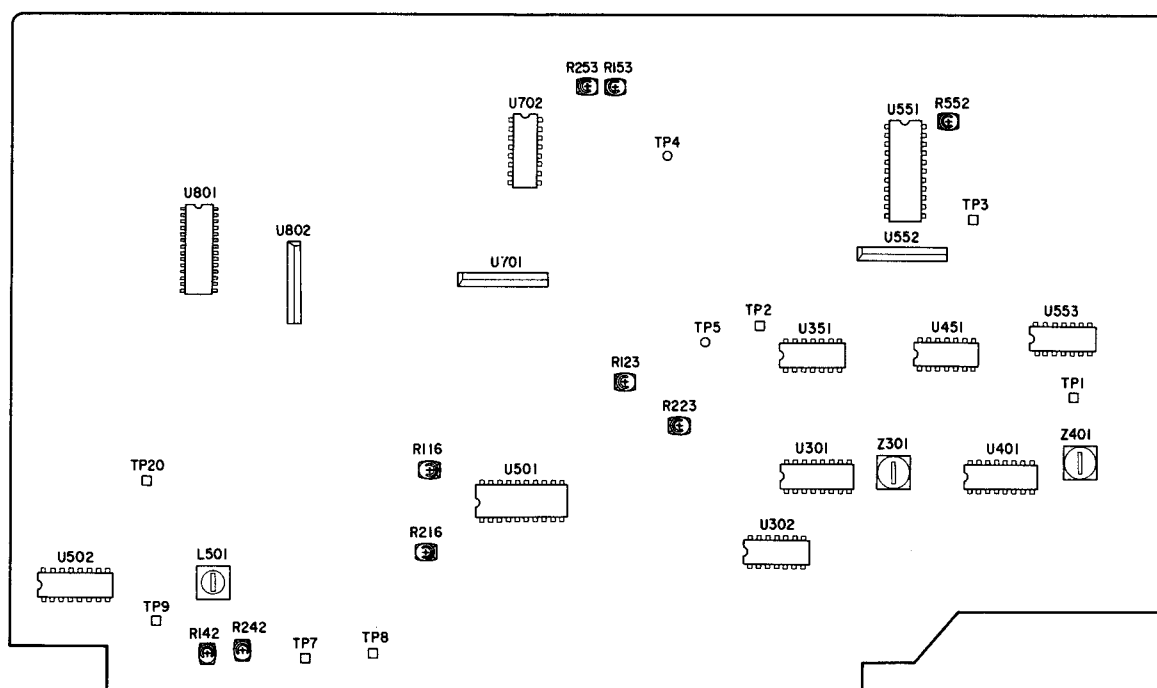


Fig. 5-9 Adjustment part location diagram (V-430X)

R116/R216	Playback level adj.	再生感度調整
R123/R223	REC/PB level adj.	録再感度調整
R142/R242	Overall freq. response adj.	録再F特調整
R153/R253	Meter adj.	メータ調整
R552	dbx adj.	DBX調整
L501	OSC Frequency adj.	発振周波数調整

## PRECAUTIONS

1. Since this deck has an automatic tape selector, be sure to use test tapes that have tape position detecting holes.
2. Before performing adjustments and checks, clean and demagnetize the entire tape path.
3. Check that the deck is properly set for the voltage in your locality.
4. In general, adjustments and checks are done in the order of L-ch then R-ch. Double REF. Nos. indicate L-ch/R-ch. (Example: R116/R226)
5. The value of "dB" refers to 0 dB (0.775V). If an AC voltmeter calibrated to 0 dB (1V) is to be used, appropriate compensation should be made.
6. The AC voltmeter used in the procedures must have an input impedance of 1M-ohms or more.

## 準備

1. 本機はテープ・セレクト自動検出機構になっていますので、テスト・テープは必ずテープ・ポジション検出孔のあるものを使用して下さい。
2. アンプ部の調整・確認の前に、テープ走行系の消磁と清掃を行なってください。
3. 特に指定のない限り、調整はLch, Rchの順序で行なって下さい。  
尚、R116/R216のように記されている回路番号は、Lch/Rchを示します。
4. 0 dB=0.775V
5. 測定に使用するレベル計の入力インピーダンスは1 MΩ以上のものを使用してください。

# V-530X/V-430X

## PLAYBACK PERFORMANCE

再生系

Initial deck setting:

OUTPUT cont: MAX  
RECORD cont: MIN  
NR SYSTEM sw: OUT

TEAC test tapes:

MTT-150: For Dolby level calibration  
MTT-256: For playback frequency response check for NORMAL  
MTT-356: For playback frequency response check for CrO<sub>2</sub>, METAL  
MTT-111: For tape speed & W/F check

ITEM 調整項目	SETTING 設定	INPUT SIGNAL 入力信号	ADJUST 調整箇所	RESULT 調整値	REMARKS 備考
1. REC/PLAY head azimuth 録再ヘッド・アジマス	Connection : Fig. 5-2	MTT-356(12.5kHz)	Azimuth adj. screw アジマス調整ネジ	OUTPUT: MAX 最大	
2. Tape speed テープ速度	Connection : Fig. 5-6	MTT-111	Semi-fixed resistor on the capstan motor キャプスタン・モータ内の半固定	OUTPUT: 3,000Hz ± 30Hz	
3. Playback level 再生レベル	Connection : Fig. 5-5	MTT-150	R116 / R216	TP-2(L ch) TP-1 (R ch) 580mV(−2.5dB) ± 10mV	OUTPUT: −3.5dB (510mV)
4. Frequency response 周波数特性	Connection : Fig. 5-1	MTT-356 (315Hz / 10kHz)	Check	OUTPUT: 315Hz 0dB 10kHz ± <sub>3</sub> dB	

## MONITOR PERFORMANCE

モニタ系

Deck setting:

Mode: REC/PAUSE  
OUTPUT cont: MAX

TEAC test tape:

MTT-5072: For METAL record test

ITEM 調整項目	SETTING 設定	INPUT SIGNAL 入力信号	ADJUST 調整箇所	RESULT 調整値	REMARKS 備考
5. OSC Frequency 発振周波数	Connection : Fig. 5-7	MTT-5072	L501	TP-9/TP-20 (GND) 83kHz ± 3kHz	
6. Specified LINE input level 規定入力レベル	Connection : Fig. 5-5 MTT-5072	LINE IN: 400Hz / −8dB (308mV)	RECORD cont: RECORD つまみ	TP-2 (L ch) TP-1 (R ch) 580mV(−2.5dB) ± 10mV	OUTPUT: −3.5dB (510mV)
LINE specified input condition. IMPORTANT: Do not touch RECORD cont. during later checks. LINE 規定入力状態 注意: 以降の調整に於て RECORD つまみを動かさないこと.					
7. PEAK LEVEL (dB) meter	Same as above	LINE IN: 400Hz / −8dB (308mV)	R153/R253	0dB light up 点 灯	

## RECORDING PERFORMANCE

録音系

Deck setting:

Mode: REC/PAUSE  
OUTPUT cont: MAX  
RECORD cont: Specified position

TEAC test tapes:

MTT-5061: For CrO<sub>2</sub> record test  
MTT-5072: For METAL record test

ITEM 調整箇所	SETTING 設定	INPUT SIGNAL 入力信号	ADJUST 調整箇所	RESULT 調整値	REMARKS 備考
8. Overall frequency response 録再周波数特性	Connection : Fig. 5-1 MTT-5061	LINE IN: 400Hz & 12.5kHz alternately / −38dB (10mV)	R142 / R242	OUTPUT: 12.5kHz output against that of 400Hz: ± 1dB 12.5kHz 出力が 400Hz に対して ± 1dB	
9. Record level 録音レベル	MTT-5061	LINE IN: 400Hz / −8dB (308mV)	R123 / R223	OUTPUT: −3.5dB (510mV)	
10. Distortion 歪率	MTT-5061	LINE IN: 333Hz / −11dB (218mV)	Check	OUTPUT: 2.0 % or less 以下	3rd Harmonic Distortion 3 次高調波歪

ITEM 調整箇所	SETTING 設定	INPUT SIGNAL 入力信号	ADJUST 調整箇所	RESULT 調整値	REMARKS 備考
11. Signal-to-noise ratio SN比	MTT-5061	LINE IN: 400Hz/−8dB (308mV) ↓ no signal	Check	OUTPUT: 49dB min. ratio 以上 (IHF A)	
12. Erase efficiency 消去率	<ul style="list-style-type: none"> <li>● Connection is same as in Fig. 5-1, but engage 1-kHz filter.</li> <li>● Record a 1-kHz signal. Rewind tape to midpoint of recorded portion. Record a "no signal" portion. Find the difference between the 1-kHz portion and the "no signal" portion.</li> </ul> 録音部分を再生した時のレベルを基準レベルとし、録音部分を消去した時の出力レベルとの差				
	MTT-5072	LINE IN: 1kHz/+2dB (1V) ↓ no signal	Check	OUTPUT: 60dB min. ratio	1kHz B. P. F. 使用
13. Channel Separation チャンネル間 セパレーション	<ul style="list-style-type: none"> <li>● Connection: Fig. 5-1, but do not connect LINE IN (R), and engage 1-kHz filter.</li> <li>● Set the deck to record mode. Find the difference between the 1-kHz recorded portion (L-ch) and the "no-signal" portion (R-ch). Then change the connection and check reverse operation.</li> </ul> Lch再生レベルを基準とし、Rchとの出力レベルの差。LchとRchの信号を入れかえた場合についてもチェックすること。				
	MTT-5061	LINE IN: L-ch 1kHz/+2dB (1V) R-ch No signal	Check	OUTPUT: 30dB min. ratio 以下	1kHz B. P. F. 使用
14. Adjacent track crosstalk 隣接トラック・ クロストーク	<ul style="list-style-type: none"> <li>● Connection: Fig. 5-1, but do not connect LINE IN (L) and OUTPUT (L), and engage 1-kHz filter.</li> <li>● Record a 125-Hz signal on R-ch and note output level. Invert tape and play R-ch track. Check leakage level against the output reference of previously recorded portion.</li> </ul> 録音されたトラックを再生したときの出力レベルを基準レベルとし、テープを反転して再生したときのRch出力レベルとの差				
	MTT-5061	LINE IN: L-ch No signal R-ch 1kHz/+2dB (1V)	Check	OUTPUT: 60dB min. ratio 以下	1kHz B. P. F. 使用
15. Dolby NR effect ドルビーNR効果 (B-type)	<ul style="list-style-type: none"> <li>● Record a 1-kHz signal with NR SYSTEM switch OUT. Play this portion with NR SYSTEM switch set first to OUT, then to <input type="checkbox"/> B. Obtain the difference in output level between OUT and <input type="checkbox"/> B positions. Repeat the above process using a 10-kHz signal.</li> </ul> NR SYSTEMスイッチをOUT位置にして信号を録音する。次にこれを再生し、スイッチをOUT↔ <input type="checkbox"/> Bと切換えた時の出力レベル変化				
	MTT-5061	LINE IN: 1kHz/−28dB (30mV)	Check	OUTPUT: Variation 3dB ~ 8dB	
		LINE IN: 10kHz/−38dB (10 mV)	Check	OUTPUT: Variation 8dB ~ 10dB	
16. Dolby NR effect ドルビーNR効果 (C-type) V-530X only	<ul style="list-style-type: none"> <li>● Repeat same procedure as above, only see that the NR SYSTEM switch is set to <input type="checkbox"/> C.</li> </ul> NR SYSTEMスイッチをOUT位置にして信号を録音する。次にこれを再生し、スイッチをOUT↔ <input type="checkbox"/> Cと切換えた時の出力レベル変化				
	MTT-5061	LINE IN: 1kHz/−38dB (10mV)	Check	OUTPUT: Variation 16dB ~ 20dB	
		LINE IN: 10kHz/−48dB (3mV)	Check	OUTPUT: Variation 16dB ~ 20dB	
17. dbx adj.	NR SYSTEM: dbx MTT-5061	LINE IN: 1kHz/−11dB (218mV)	R552	between TP-3 & TP-4 15±0.15mV DC	
18. Signal-to-noise ratio (dbx)	NR SYSTEM: dbx MTT-5061	LINE IN: 400Hz/−8dB (308mV) ↓ no signal	Check	OUTPUT: 72dB min. ratio 以上 (IHF A)	



## 6 BLOCK DIAGRAM

ブロック・ダイアグラム

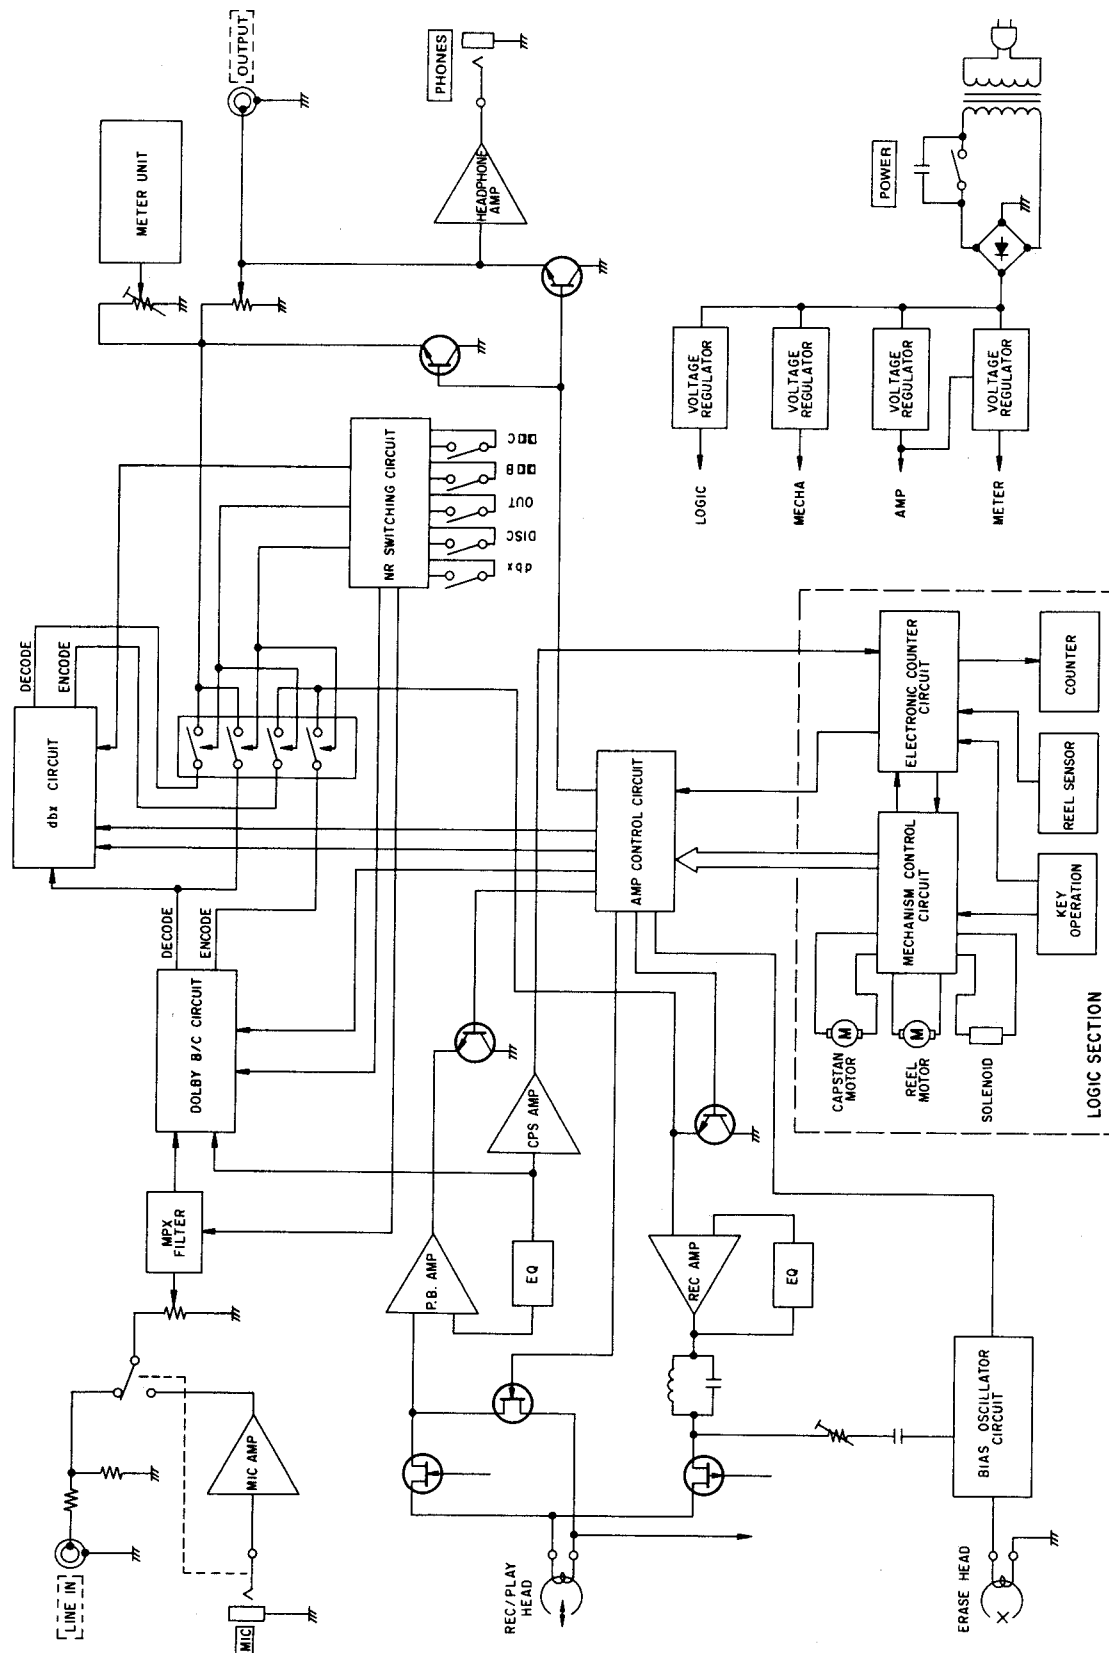
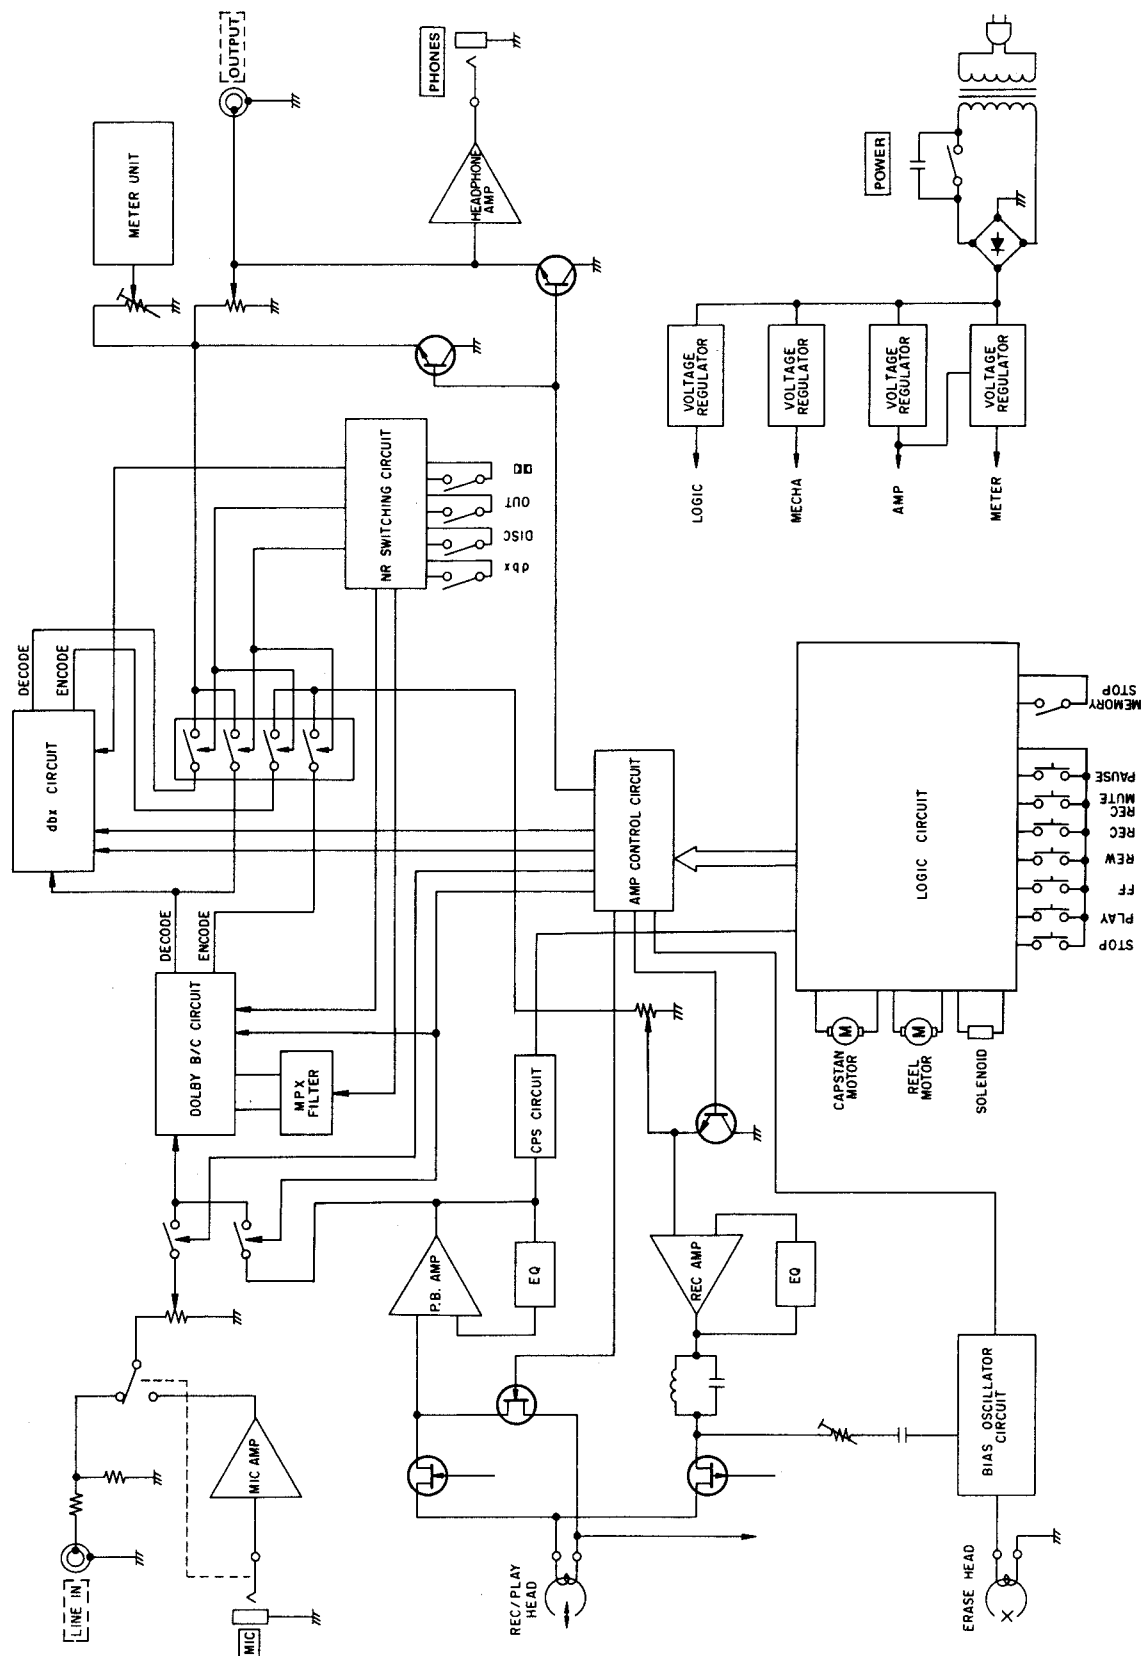


Fig. 6-1 Block diagram (V-530X)




**Fig. 6-2 Block diagram (V-430X)**

## ASSEMBLING HARDWARE CODING LIST

### ねじ類一覧表


All screws conform to ISO standards, and have crossrecessed heads, unless otherwise noted.  
ISO screws have the head inscribed with a point as in the figure to the right.



FOR EXAMPLE:

B M 3 x 6

----- Length in mm (L)  
----- Diameter in mm (D) \*  
----- Metric System  
----- Nomenclature



\* Inner dia. for washers and nuts


	Code	Name	Type		Code	Name	Type
MACHINE SCREW	<b>R</b>	Round Head Screw		TAPPING SCREW	<b>BTA</b>	Binding Head Tapping Screw(A Type)	
	<b>P</b>	Pan Head Screw			<b>BTB</b>	Binding Head Tapping Screw(B Type)	
	<b>T</b>	Stove Head Screw (Truss)			<b>RTA</b>	Round Head Tapping Screw(A Type)	
	<b>B</b>	Binding Head Screw			<b>RTB</b>	Round Head Tapping Screw(B Type)	
	<b>F</b>	Flat Countersunk Head Screw		SETSCREW	<b>SF</b>	Hex Socket Setscrew(Flat Point)	
	<b>O</b>	Oval Countersunk Head Screw			<b>SC</b>	Hex Socket Setscrew(Cup Point)	
WOOD SCREW	<b>RW</b>	Round Head Wood Screw			<b>SS</b>	Slotted Socket Setscrew(Flat Point)	
	<b>FW</b>	Flat Countersunk Wood Screw		WASHER	<b>E</b>	E-Ring (Retaining Washer)	
	<b>OW</b>	Oval Countersunk Wood Screw			<b>W</b>	Flat Washer (Plain)	
SEMS SCREW	<b>BSA</b>	Binding Head SEMS Screw(A Type)			<b>SW</b>	Lock Washer (Spring)	
	<b>BSB</b>	Binding Head SEMS Screw(B Type)			<b>LWI</b>	Lock Washer (Internal Teeth)	
	<b>BSF</b>	Binding Head SEMS Screw(F Type)			<b>LWE</b>	Lock Washer (External Teeth)	
	<b>PSA</b>	Pan Head SEMS Screw(A Type)			<b>TW</b>	Trim Washer (Countersunk)	
	<b>PSB</b>	Pan Head SEMS Screw(B Type)		NUT	<b>N</b>	Hex Nut	

**PARTS LIST SECTION**

## 7 EXPLODED VIEWS AND PARTS LIST

## 分解図とパーツ・リスト

### EXPLODED VIEW-1 (V-530X)

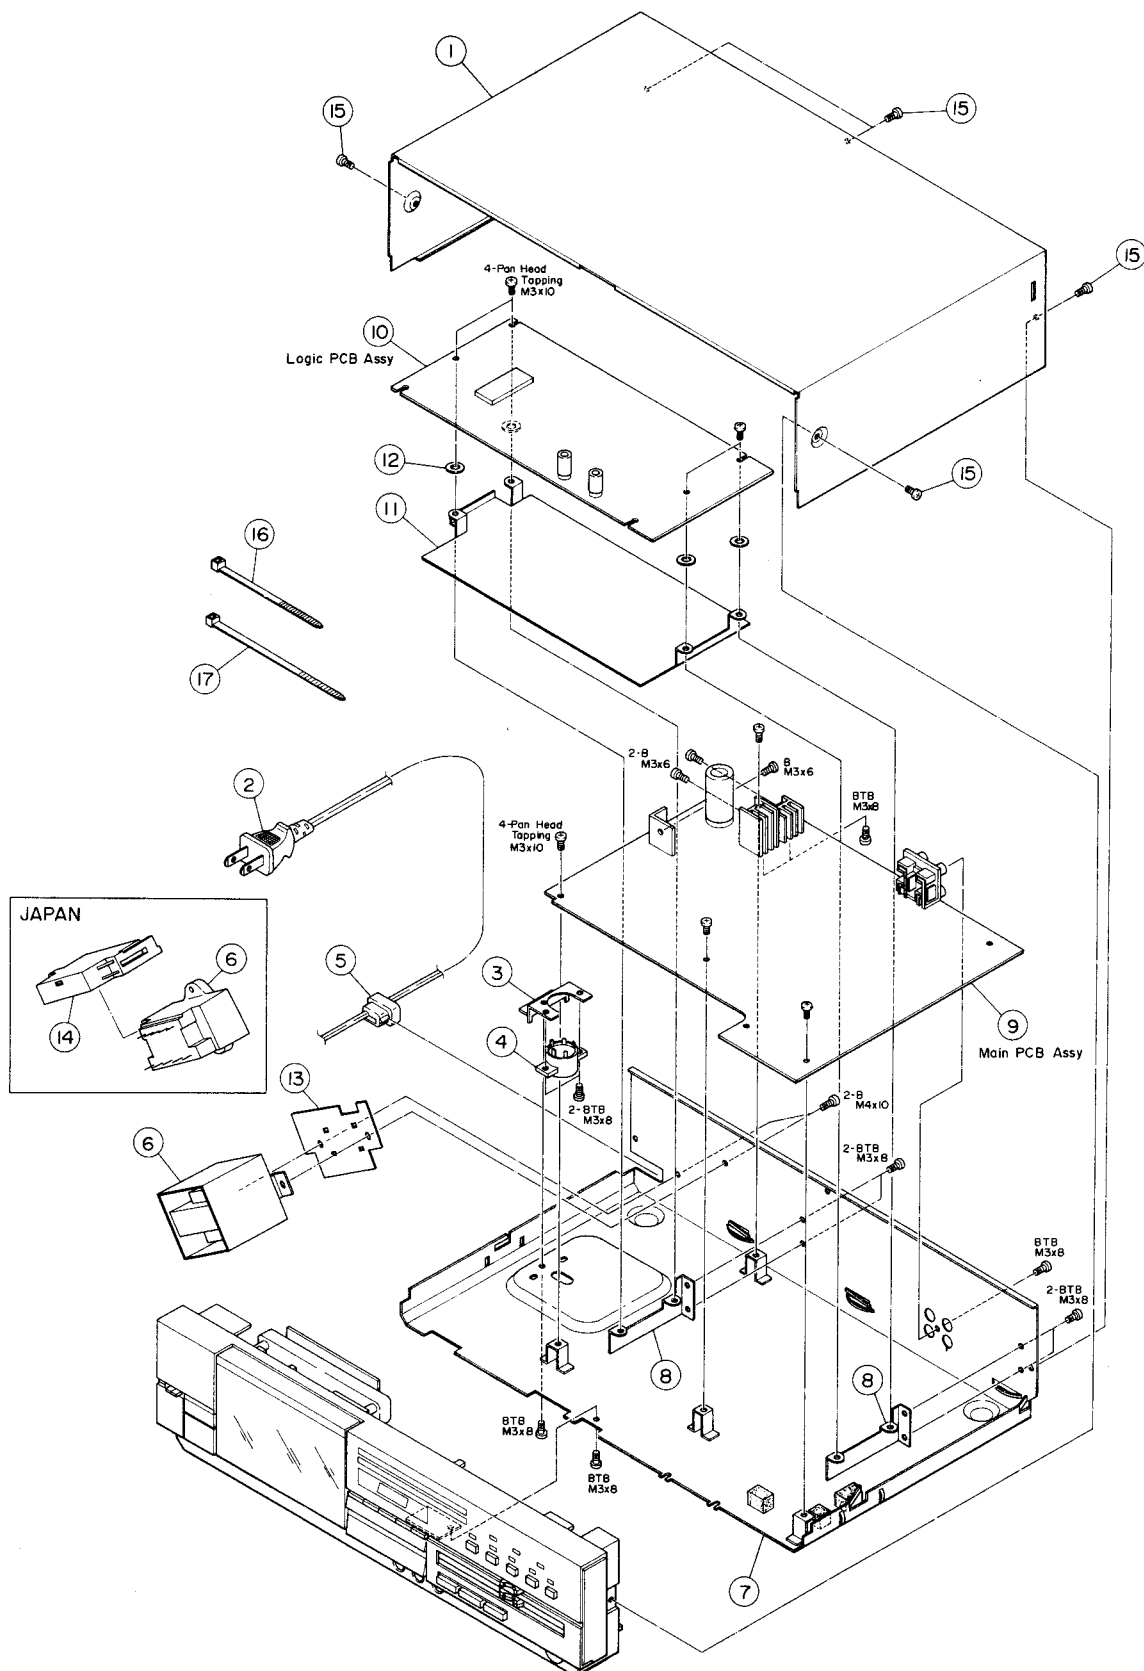

REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
1 - 1	*5760682300	Cover, Top (BLK)		
	*5760682500	Cover, Top		
1 - 2	△ *5128027000	Cord Assy, AC Power	[J]	
	△ *5350010800	Cord Assy, AC Power	[US, C, GE]	
	△ *5128047000	Cord Assy, AC Power	[UK]	
	△ *5350011700	Cord Assy, AC Power	[E]	
1 - 3	*5760680400	Bracket, Voltage Selector	[GE]	
1 - 4	△ *5760673100	Switch, Voltage Selector	[GE]	
1 - 5	△ *5760680600	Bushing, Cord		
1 - 6	△ 5760722200	Transformer, Power	[J]	
	△ 5760673800	Transformer, Power; 367-U/C	[US, C]	
	△ 5760673900	Transformer, Power; 368-TU	[E]	
	△ 5760674100	Transformer, Power; 371-VF	[GE]	
1 - 7	*5760722000	Chassis Assy	[J]	
	*5760681700	Chassis Assy	[US, C]	
	*5760681900	Chassis Assy	[E]	
	*5760681800	Chassis Assy	[GE]	
1 - 8	*5760681000	Bracket, PCB		
1 - 9	*5760770000	PCB Assy, Main		
1 - 10	*5760770100	PCB Assy, Logic		
1 - 11	*5760675300	Plate, Shield		
1 - 12	*5760675700	Spacer		
1 - 13	*5760680700	Retainer, Transformer		
1 - 14	*5760680900	Cover, Transformer (V-530XBL)	[J]	
1 - 15	*5760675000	Screw, Binding Head Tapping; M3 x 10 (Ni)		
	*5760674900	Screw, Binding Head Tapping; M3 x 10 (BLK)		
1 - 16	*5760722300	Band, Wire; SS L100		
1 - 17	*5760722400	Band, Wire; L145		

## INCLUDED ACCESSORIES

REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
	*5700060700	V-530X/V-430X Owner's Manual	[J]	
	*5700060500	V-530X/V-430X Owner's Manual	[All except J]	
	*5700060600	V-530X/V-430X Owner's Manual	[C, GE, E]	
	*5760722600	Cord Assy, In-output		

Parts marked with \* require longer delivery time.

[US]: U.S.A.  
[J]: JAPAN


[C]: CANADA

[GE]: GENERAL EXPORT

[E]: EUROPE

[UK]: U.K.

## EXPLODED VIEW-2 (V-530X)

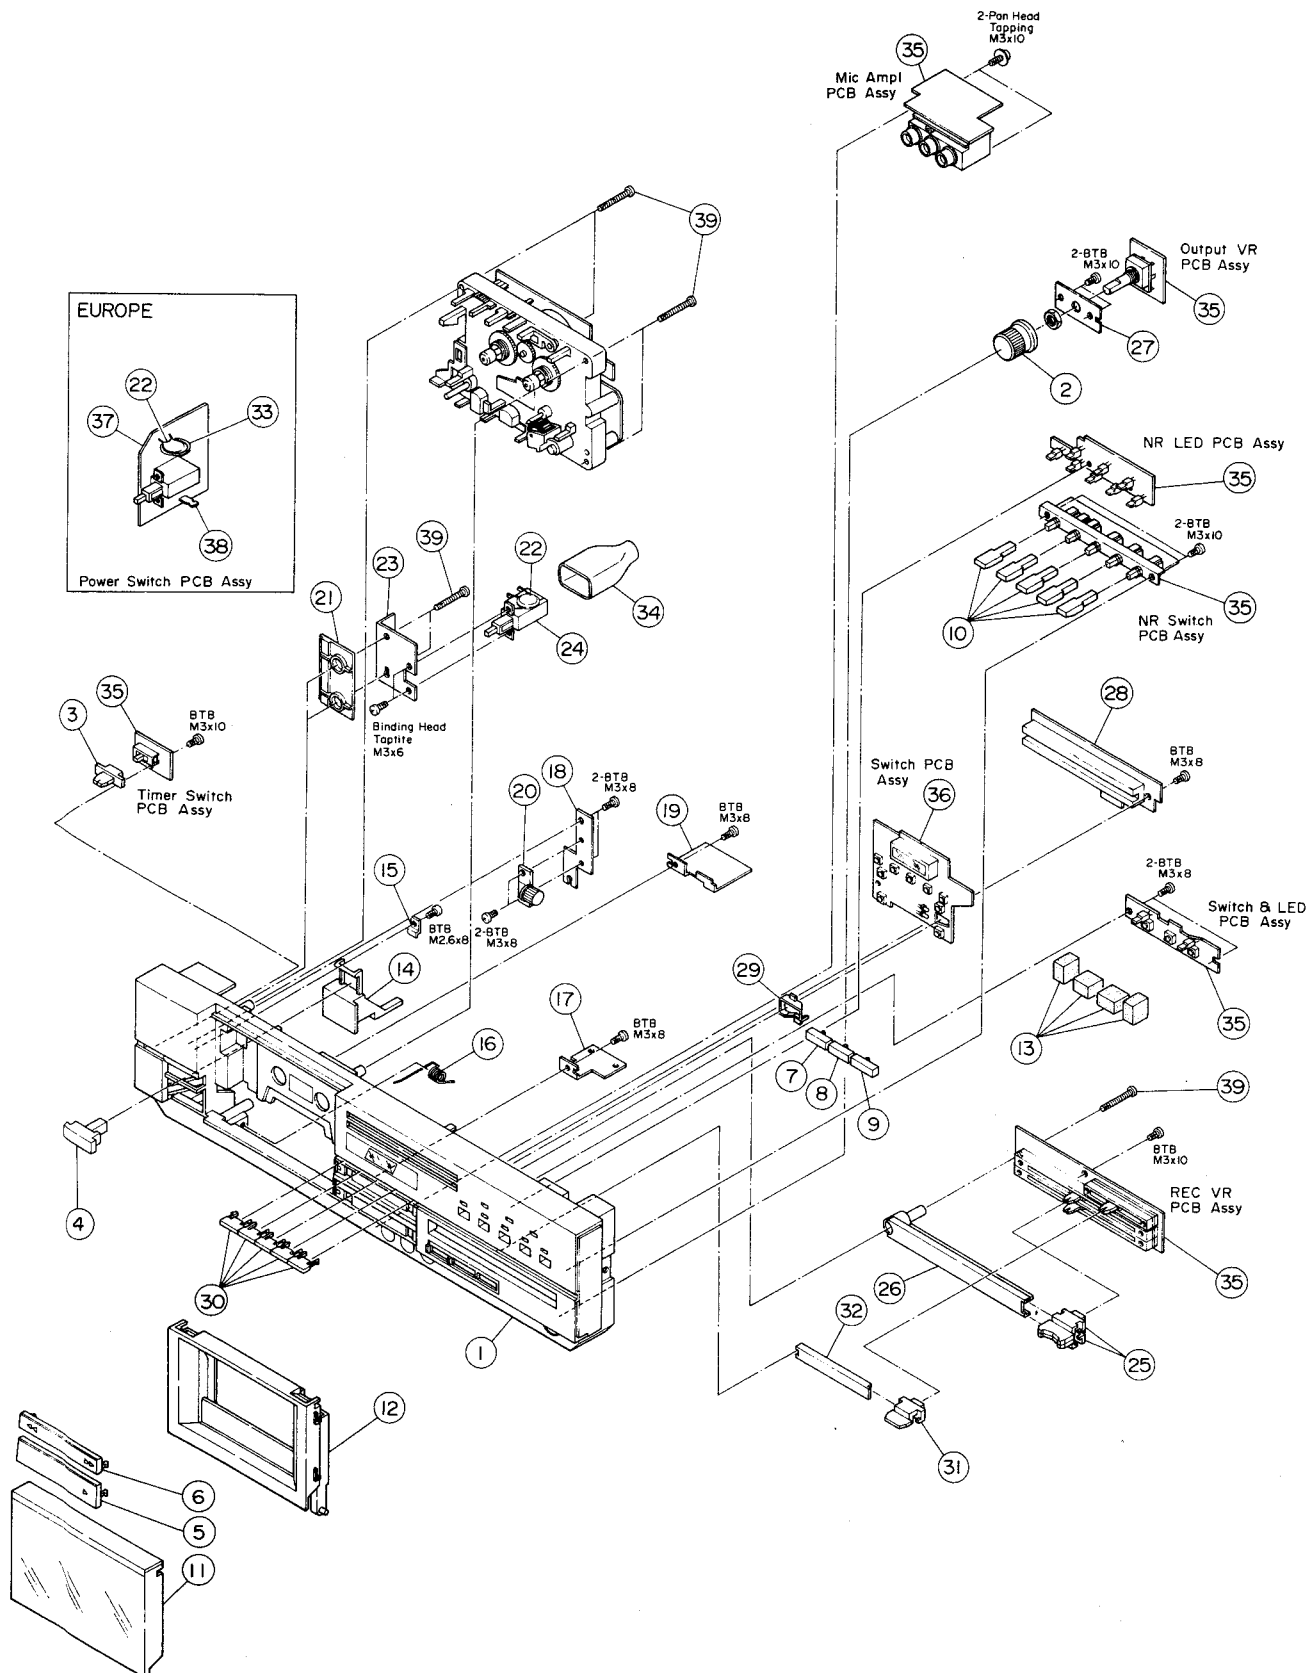



REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
2 - 1	*5760686600	Panel Assy, Front		
	*5760686400	Panel Assy, Front (BLK)		
2 - 2	5760684500	Knob, OUTPUT VR		
2 - 3	5760684200	Knob, TIMER		
	5760684800	Knob, TIMER (BLK)		
2 - 4	5760684100	Knob, POWER		
	5760684900	Knob, POWER (BLK)		
2 - 5	5760684400	Knob, PLAY		
	5760685100	Knob, PLAY (BLK)		
2 - 6	5760684000	Knob, FF		
	5760685200	Knob, FF (BLK)		
2 - 7	5760683900	Knob, REC		
	5760685600	Knob, REC (BLK)		
2 - 8	5760684600	Knob, MUTE		
	5760685700	Knob, MUTE (BLK)		
2 - 9	5760684700	Knob, PAUSE		
	5760685800	Knob, PAUSE (BLK)		
2 - 10	5760683700	Knob, NR		
	5760685900	Knob, NR (BLK)		
2 - 11	5760683100	Cover Assy, Cassette		
	5760683200	Cover Assy, Cassette (BLK)		
2 - 12	5760724900	Holder Assy, Cassette		
2 - 13	*5760679900	Cushion		
2 - 14	5760684300	Knob, EJECT		
	5760685000	Knob, EJECT (BLK)		
2 - 15	*5760676000	Bracket, Knob		
2 - 16	*5760678300	Spring, EJECT		
2 - 17	*5760682000	Bracket, Cassette Holder; R		
2 - 18	*5760682200	Bracket, Damper		
2 - 19	*5760682400	Bracket, Cassette Holder; L		
2 - 20	5760683000	Damper New		
2 - 21	*5760676500	Cover, Panel		
	*5760676400	Cover, Panel (BLK)		
2 - 22	△ *5760769100	Capacitor, Cermaic 4700pF [E]		
	△ *5760769200	Capacitor, Ceramic 0.01μF 50V [J, US, C, GE]		
2 - 23	*5760682100	Side Chassis, L		
2 - 24	5760673200	Switch, POWER		
2 - 25	5760724500	Knob Assy, REC		
	*5760769500	Knob Assy, REC (BLK)		
2 - 26	*5760682700	Guide, REC VR		
2 - 27	*5760680500	Bracket, VR		
2 - 28	5760670200	Meter Unit		
2 - 29	*5760679800	Reflector, 430		
2 - 30	5760683600	Knob, CPS		
	5760685300	Knob, CPS (BLK)		
2 - 31	5760724600	Knob Assy, BIAS		
	5760724700	Knob Assy, BIAS (BLK)		
2 - 32	*5760682800	Guide, BIAS		
2 - 33	*5760675800	Cover, Capacitor [E]		
2 - 34	*5760676200	Cover, Switch [US, C]		
2 - 35	*5760770000	PCB Assy, Main		
2 - 36	*5760770100	PCB Assy, Logic		
2 - 37	*5760672200	PCB, Power Switch [E]		
2 - 38	*5760672000	Terminal, Power [E]		
2 - 39	*5760674800	Screw, Binding Head Tapping; M3 x 25 (Red)		

Parts marked with \* require longer delivery time.

[US]: U.S.A.  
[J]: JAPAN


[C]: CANADA

[GE]: GENERAL EXPORT

[E]: EUROPE

[UK]: U.K.

## EXPLODED VIEW-3 (V-430X)

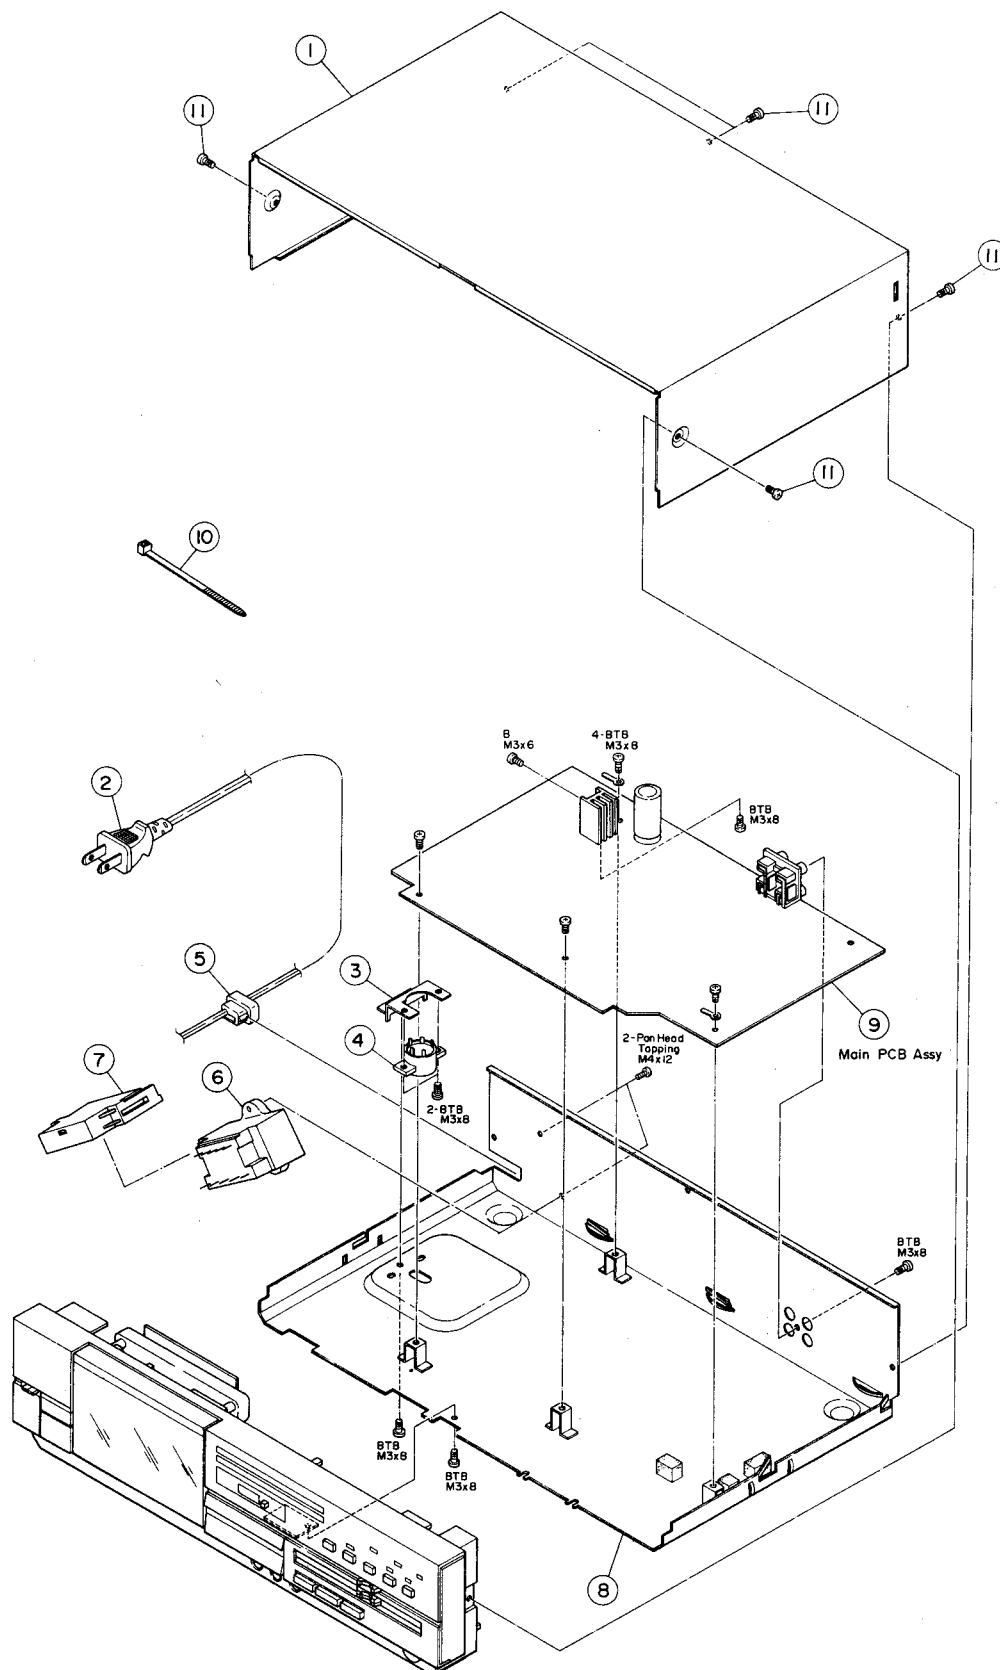

REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
3 - 1	*5760682300	Cover, Top (BLK)		
	*5760682500	Cover, Top		
3 - 2	△*5128027000	Cord Assy, AC Power	[J]	
	△*5350010800	Cord Assy, AC Power	[US, C, GE]	
	△*5128047000	Cord Assy, AC Power	[UK]	
	△*5350011700	Cord Assy, AC Power	[E]	
3 - 3	*5760680400	Bracket, Voltage Selector	[GE]	
3 - 4	△*5760673100	Switch, Voltage Selector	[GE]	
3 - 5	△*5760680600	Bushing, Cord		
3 - 6	△5760722100	Transformer, Power	[J]	
	△5760673700	Transformer, Power; 163-U/C	[US, C]	
	△5760673500	Transformer, Power; 115-TE	[E]	
	△5760674000	Transformer, Power; 370-VF	[GE]	
	△5760673600	Transformer, Power; 157-TU	[UK]	
3 - 7	*5760680900	Cover, Transformer	[J, US, C, E, UK]	
3 - 8	*5760721900	Chassis Assy	[J]	
	*5760681300	Chassis Assy	[US, C]	
	*5760681400	Chassis Assy	[E]	
	*5760681600	Chassis Assy	[GE]	
	*5760681500	Chassis Assy	[UK]	
3 - 9	*5760770010	PCB Assy, Main		
3 - 10	*5760722300	Band, Wire; SS 100		
3 - 11	*5760675000	Screw, Binding Head Tapping; M3 x 10 (Ni)		
	*5760674900	Screw, Binding Head Tapping; M3 x 10 (BLK)		

Parts marked with \* require longer delivery time.

[US]: U.S.A.  
[J]: JAPAN


[C]: CANADA

[GE]: GENERAL EXPORT

[E]: EUROPE

[UK]: U.K.


## EXPLODED VIEW-4 (V-430X)

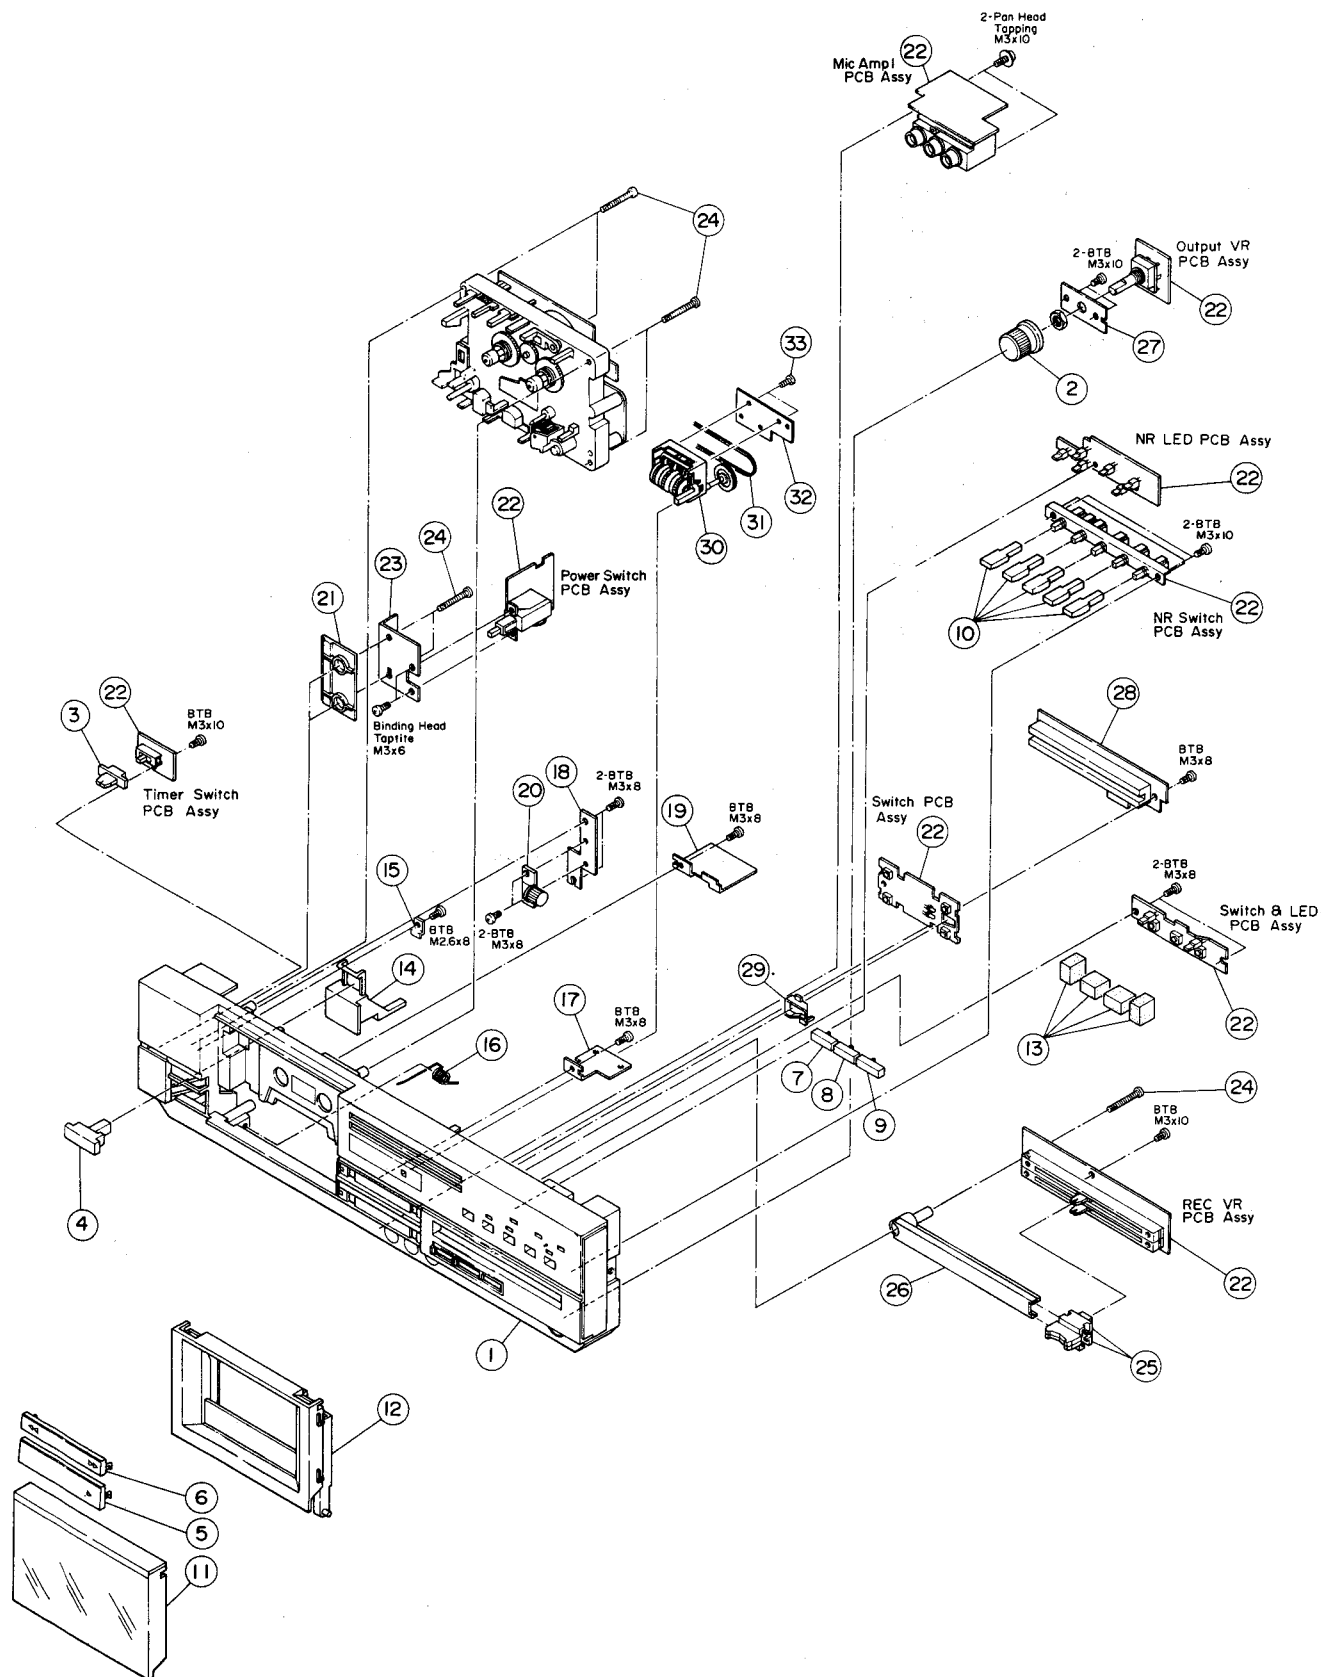

REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
4 - 1	*5760686500	Panel Assy, Front		
	*5760769900	Panel Assy, Front (BLK)		
4 - 2	5760684500	Knob, OUTPUT VR		
4 - 3	5760684200	Knob, TIMER		
	5760684800	Knob, TIMER (BLK)		
4 - 4	5760684100	Knob, POWER		
	5760684900	Knob, POWER (BLK)		
4 - 5	5760686000	Knob, PLAY (S)		
	5760685100	Knob, PLAY (BLK)		
4 - 6	5760686100	Knob, FF (S)		
	5760685200	Knob, FF (BLK)		
4 - 7	5760683900	Knob, REC		
	5760685600	Knob, REC (BLK)		
4 - 8	5760684600	Knob, MUTE		
	5760685700	Knob, MUTE (BLK)		
4 - 9	5760684700	Knob, PAUSE		
	5760685800	Knob, PAUSE (BLK)		
4 - 10	5760683700	Knob, NR		
	5760685900	Knob, NR (BLK)		
4 - 11	5760683100	Cover Assy, Cassette		
	5760683200	Cover Assy, Cassette (BLK)		
4 - 12	5760724800	Holder Assy, Cassette		
4 - 13	*5760679900	Cushion		
4 - 14	5760684300	Knob, EJECT		
	5760685000	Knob, EJECT (BLK)		
4 - 15	*5760676000	Bracket, Knob		
4 - 16	*5760678300	Spring, EJECT		
4 - 17	*5760682000	Bracket, Cassette Holder; R		
4 - 18	*5760682200	Bracket, Damper		
4 - 19	*5760682400	Bracket, Cassette Holder; L		
4 - 20	5760683000	Damper New		
4 - 21	*5760676500	Cover, Panel		
	*5760676400	Cover, Panel (BLK)		
4 - 22	*5760770010	PCB Assy, Main		
4 - 23	*5760682100	Side Chassis, L		
4 - 24	*5760674800	Screw, Binding Head Tapping; M3 x 25 (Red)		
4 - 25	5760724500	Knob Assy, REC		
	*5760769500	Knob Assy, REC (BLK)		
4 - 26	*5760682700	Guide, REC VR		
4 - 27	*5760680500	Bracket, VR		
4 - 28	5760670200	Meter Unit		
4 - 29	*5760679800	Reflector, 430		
4 - 30	5760682900	Counter, Tape		
4 - 31	5760678100	Belt, Counter		
4 - 32	*5760680300	Bracket, Counter		
4 - 33	*5760722500	Screw, Binding Head Tapping; M2.6 x 6		

Parts marked with \* require longer delivery time.

## EXPLODED VIEW-5

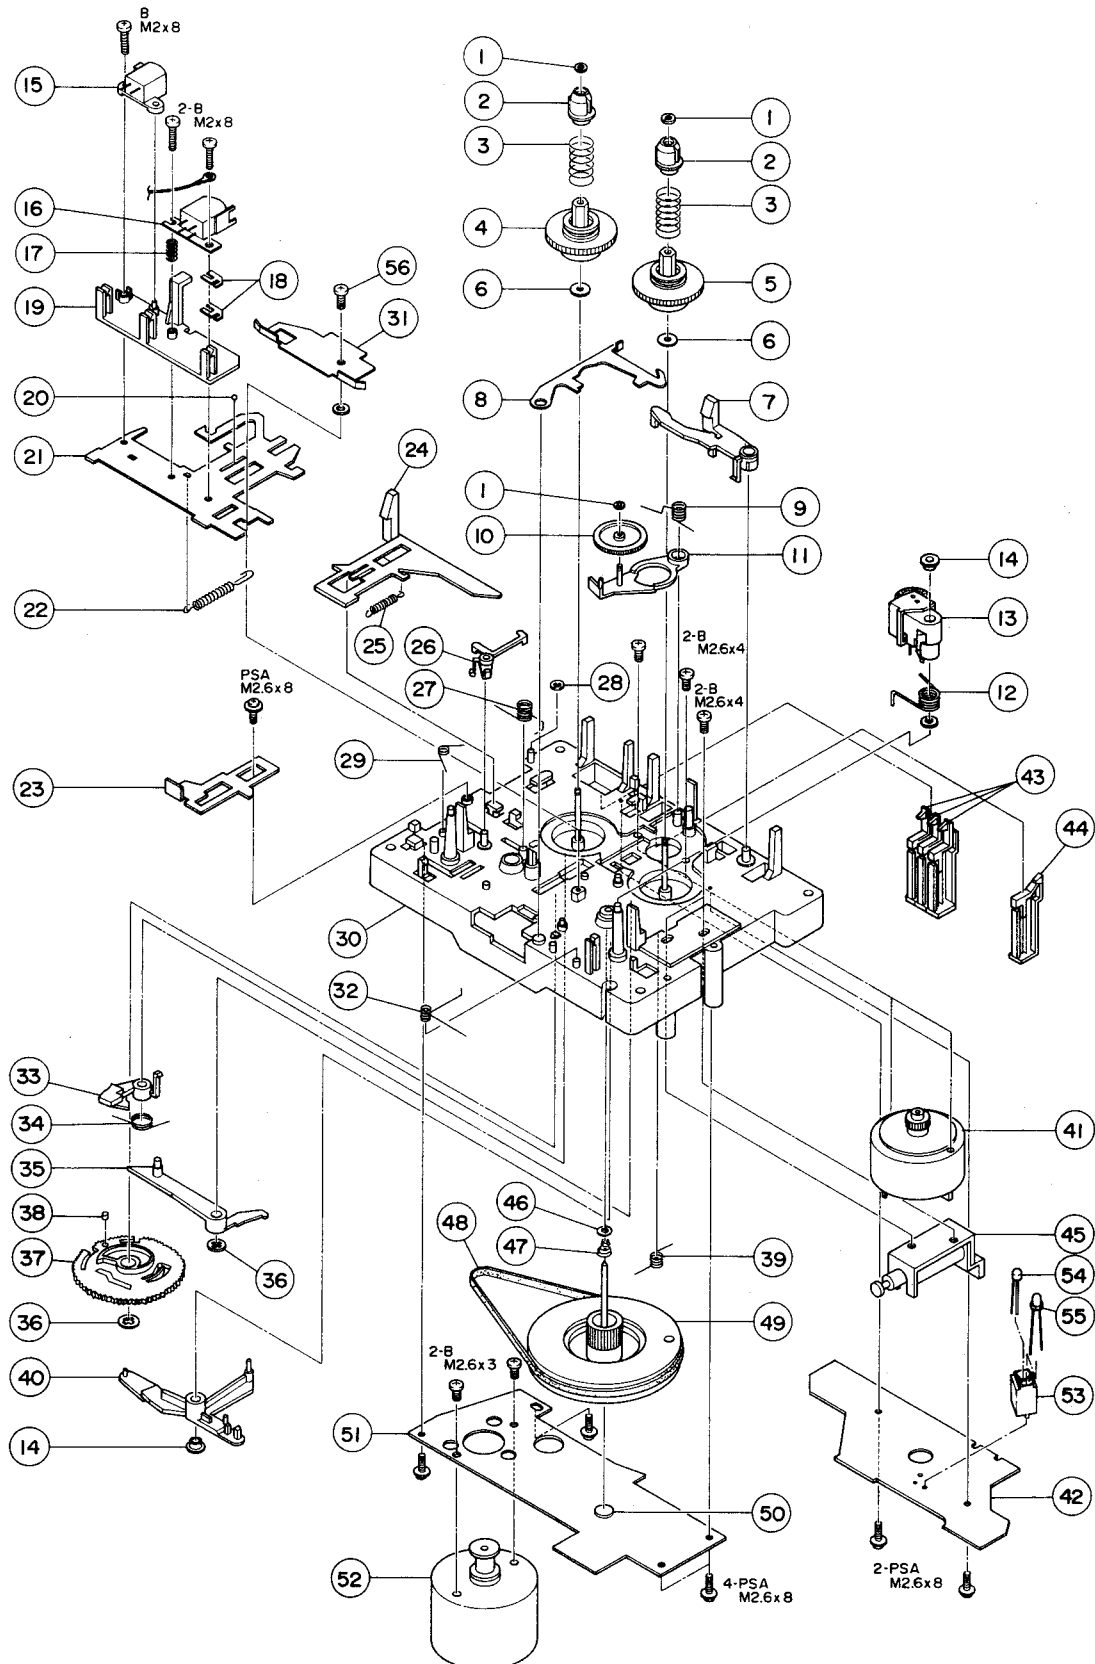

REF. NO.	PARTS NO.	DESCRIPTION	COMMON MODELS	REMARKS
5 - 1	5760707100	Washer, Reel Drum; $\phi 1.6 \times \phi 4 \times 0.5t$		
5 - 2	5760706700	Collar, Reel		
5 - 3	5760707200	Spring, Reel		
5 - 4	5760706800	Drum, Reel		
5 - 5	5760707400	Drum Assy, Take-up Reel		
5 - 6	5760707000	Washer, Reel Drum		
5 - 7	*5760705200	Lever, Holder		
5 - 8	*5760721400	Lever, M.Q.S.		
5 - 9	5760705000	Spring, Holder		
5 - 10	5760706900	Gear, Transfer		
5 - 11	5760721100	Lever Assy, Take-up		
5 - 12	5760704300	Spring, Pinch Roller Lever		
5 - 13	5760704500	Lever Assy, Pinch Roller		
5 - 14	5760699100	Bush (BLK)		
5 - 15	5760702600	Head ERASE; HET-255		
5 - 16	5378903700	Head, Rec/Play; TDK		
5 - 17	5760703400	Spring, Azimuth		
5 - 18	5760702300	Spacer, Adjust		
5 - 19	5760703700	Base, Head		
5 - 20	5760703200	Ball, Steel; $\phi 1.5$		
5 - 21	*5760703100	Slider, Head		
5 - 22	*5760703300	Spring, Assist		
5 - 23	*5760704700	Sub Slider, Eject		
5 - 24	*5760705400	Slider, Eject		
5 - 25	*5760704800	Spring, Eject		
5 - 26	*5760705300	Lever, Lock		
5 - 27	5760703500	Spring, PLAY Lever		
5 - 28	*5760705100	Bushing		
5 - 29	5760704900	Spring, Lock		
5 - 30	*5760703000	Chassis Assy, Mechanism		
5 - 31	*5760703600	Holder, Spring		
5 - 32	5760706100	Spring, M.Q.S.		
5 - 33	*5760706300	Lever, PLAY Lock		
5 - 34	*5760706000	Spring, PLAY Lock		
5 - 35	*5760706400	Lever, PLAY		
5 - 36	*5760705600	Ring		
5 - 37	5760705800	Cam Gear, Main		
5 - 38	*5760705500	Magnet, $\phi 2.3 \times 2.8$		
5 - 39	*5760705900	Spring, Cam Lock		
5 - 40	*5760706500	Lever, Cam Lock		
5 - 41	5760702900	Motor Assy, Reel		
5 - 42	*5760702200	PCB Assy, Mechanism		
5 - 43	5760702400	Switch, Cassette; S851 ~ S853		
5 - 44	5760702500	Switch, Metal Tape; S854		
5 - 45	5760705700	Solenoid, L1		
5 - 46	5760704000	Washer, Flywheel		
5 - 47	5760704200	Spring, Flywheel		
5 - 48	5760703900	Belt, Main		
5 - 49	5760704600	Flywheel Assy		
5 - 50	*5760704100	Washer, Thrust		
5 - 51	*5760721000	Plate, Motor Mount		
5 - 52	5760702800	Motor Assy, Main		
5 - 53	*5760702700	Holder, Sensor (V-530X)		
5 - 54	5760702100	Phototransistor, TPS-603-B, Q851 (V-530X)		
5 - 55	5760668700	LED, TLR-123; D851 (V-530X)		
5 - 56	*5760725200	Screw, Binding Head Tapping; M2 x 5		


Parts marked with \* require longer delivery time.




## 8 PC BOARDS AND PARTS LIST

基板図とパーツ・リスト


### — Amplifier Section — MIC AMPL. PCB ASSY (V-530X)

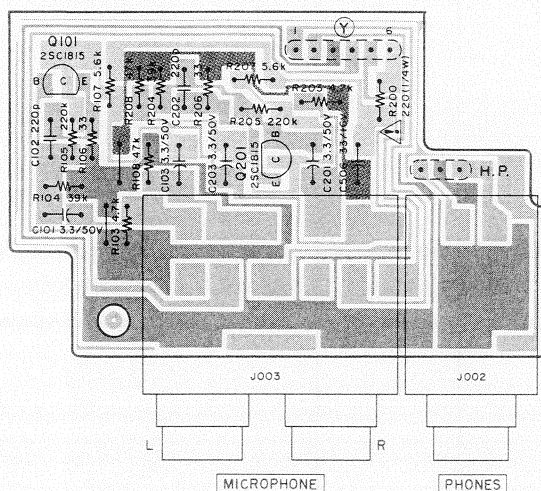


### SWITCH & LED PCB ASSY (V-530X)

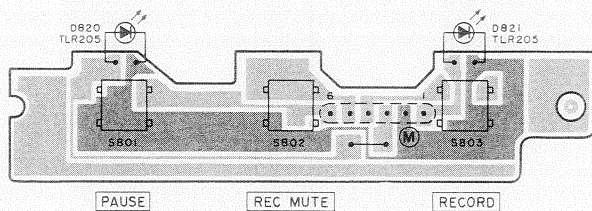


### OUTPUT VR PCB ASSY (V-530X)




### NR LED PCB ASSY (V-530X)

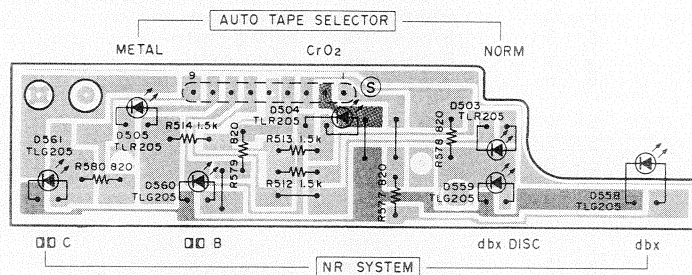


### NR SWITCH PCB ASSY (V-530X)

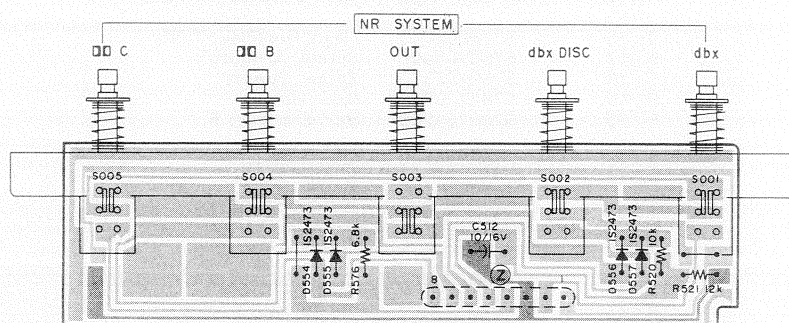

### TIMER SWITCH PCB ASSY (V-530X)




### REC VR PCB ASSY (V-530X)

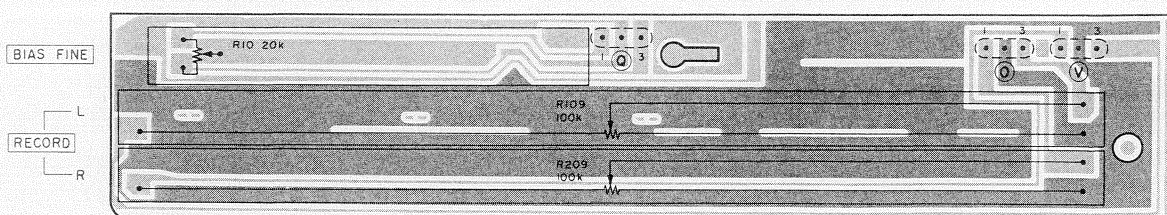




— Amplifier Section (V-530X) —

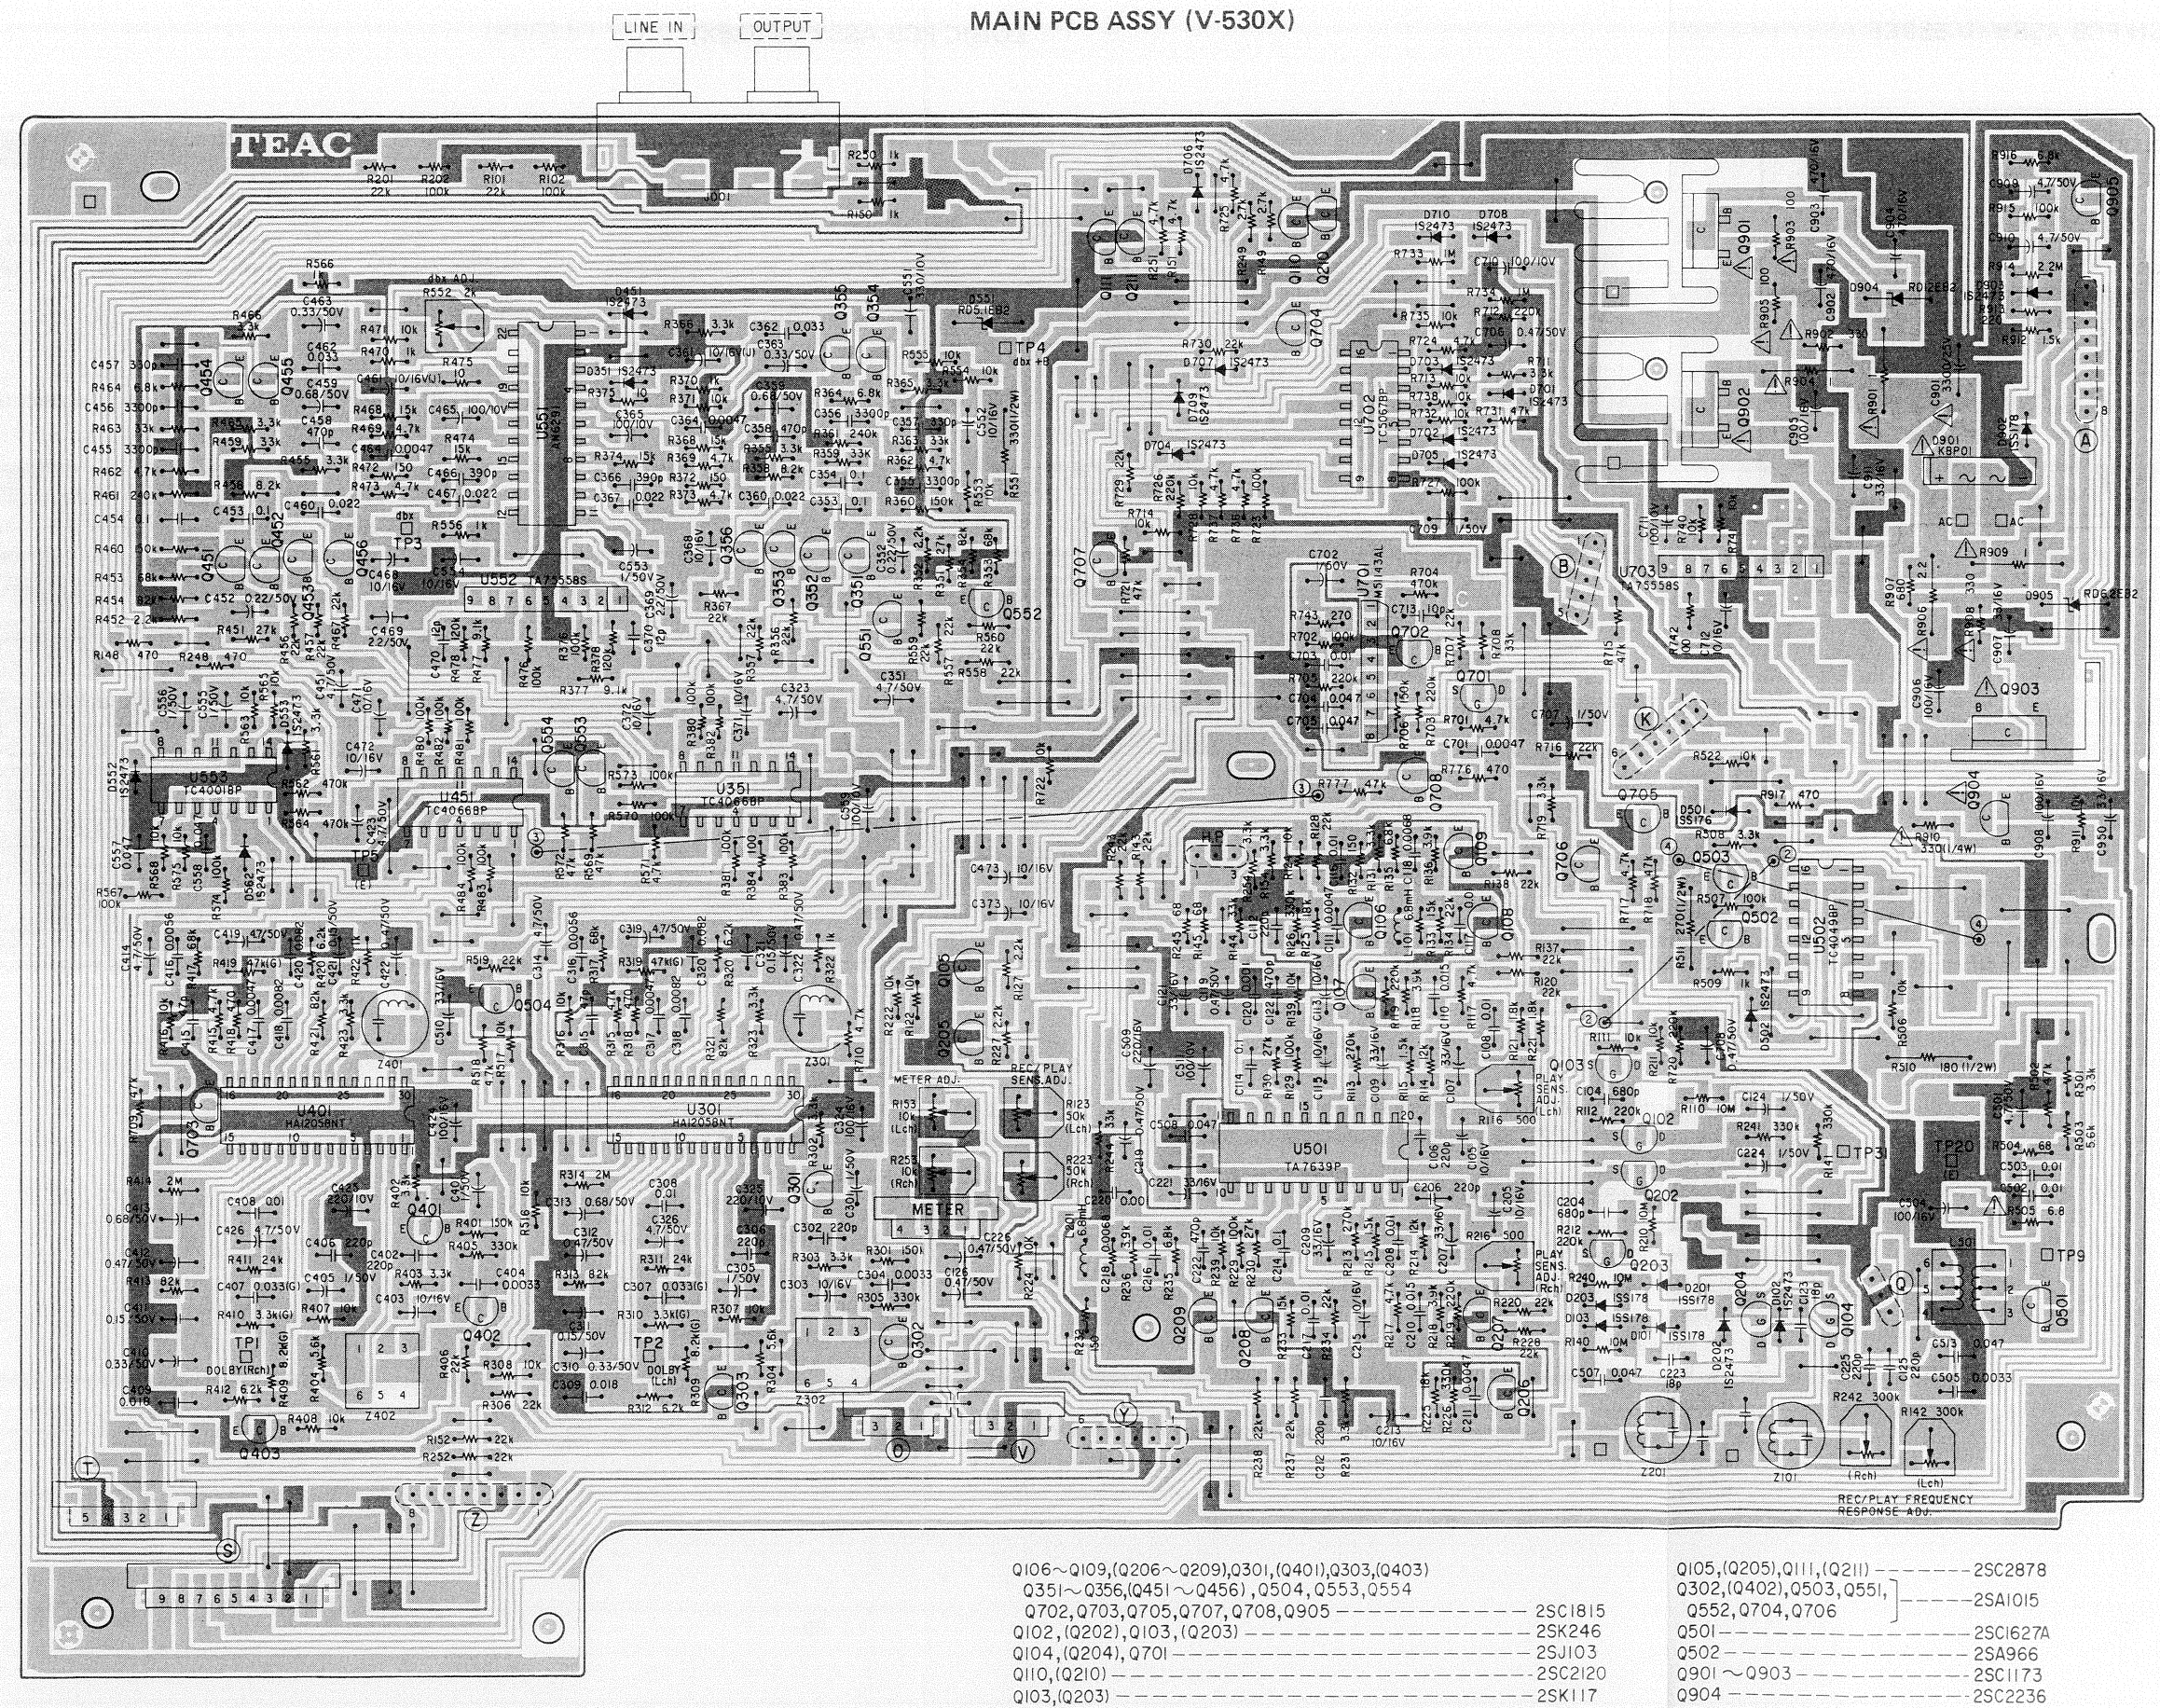



## — Control Section (V-530) —

SWITCH PCB ASSY (V-530X)

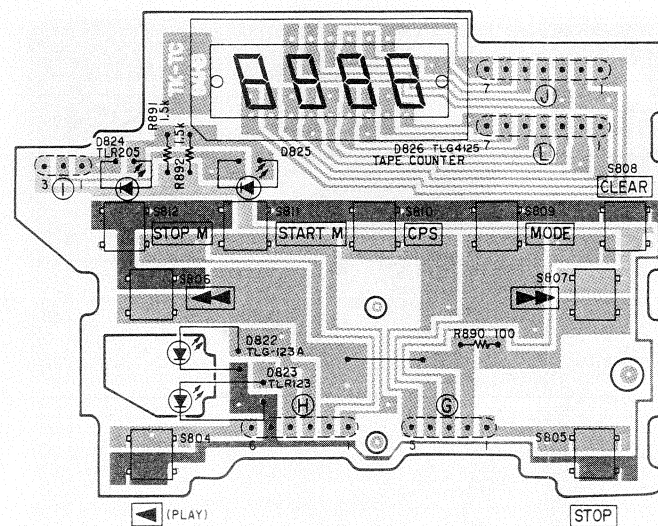


Q801, Q802	2SC1959
Q803	2SC1627A
Q804, Q807, Q811, Q812, Q815, Q817	2SC1815
Q805, Q808 ~ Q810, Q813, Q814	2SA1015
Q806	2SD1140
Q816	2SA562TM

## NOTES

- PC boards are shown viewed from foil side.
- The colors on the PC board illustrations have the following significance:
  - : +B power supply circuit
  - : GND
  - : other
- Resistor values are in ohms (k = kilo-ohms, M = meg-ohms).
- All capacitor values are in microfarads (p = picofarads).
- △ Parts marked with this sign are safety critical components. They must always be replaced with identical components. Refer to the appropriate parts list to ensure exact replacement.


LOGIC PCB ASSY (V-530X)

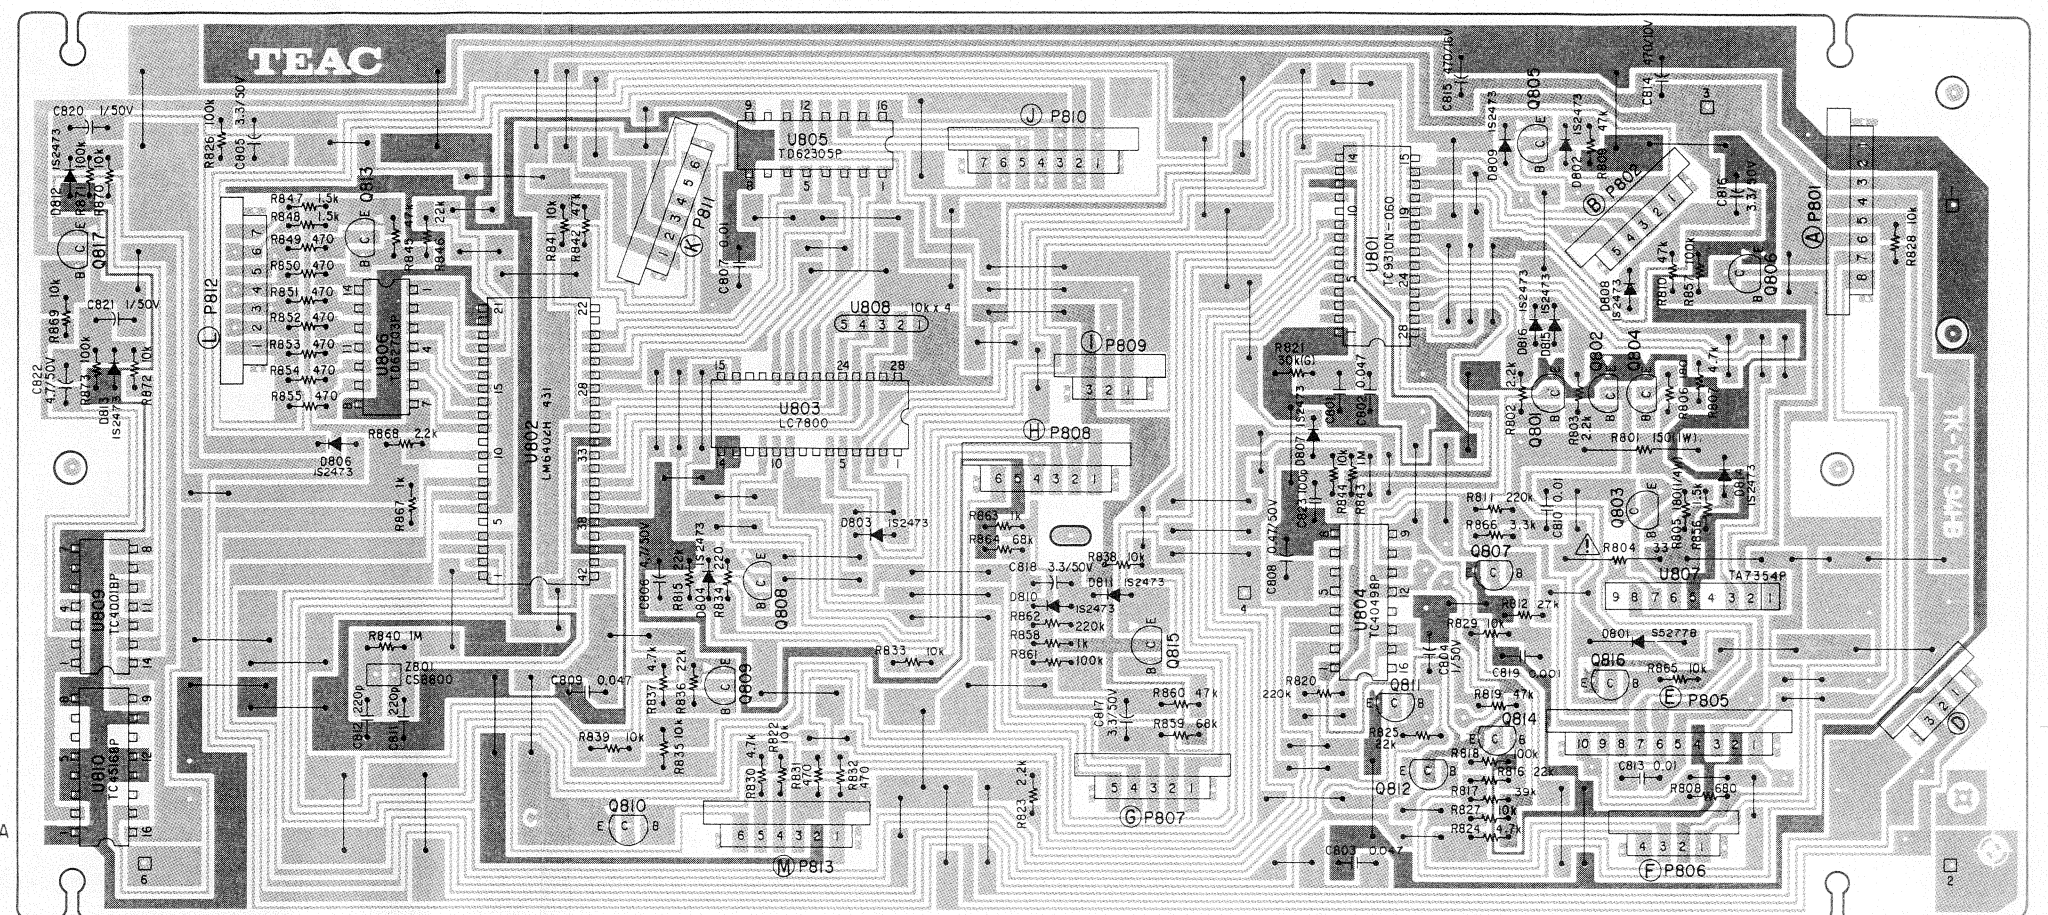

## 注

- 基板図はパターン面が示されています。
- プリント・パターンは次のように色別されています。
  - : +B電源回路
  - : GND
  - : その他の回路
- 抵抗の単位はΩ (k=kΩ, M=MΩ) です。
- コンデンサの単位はμF (p=pF) です。
- △マークのある部品は安全重要部品です。交換するときは必ずティアック指定の部品を使用してください。



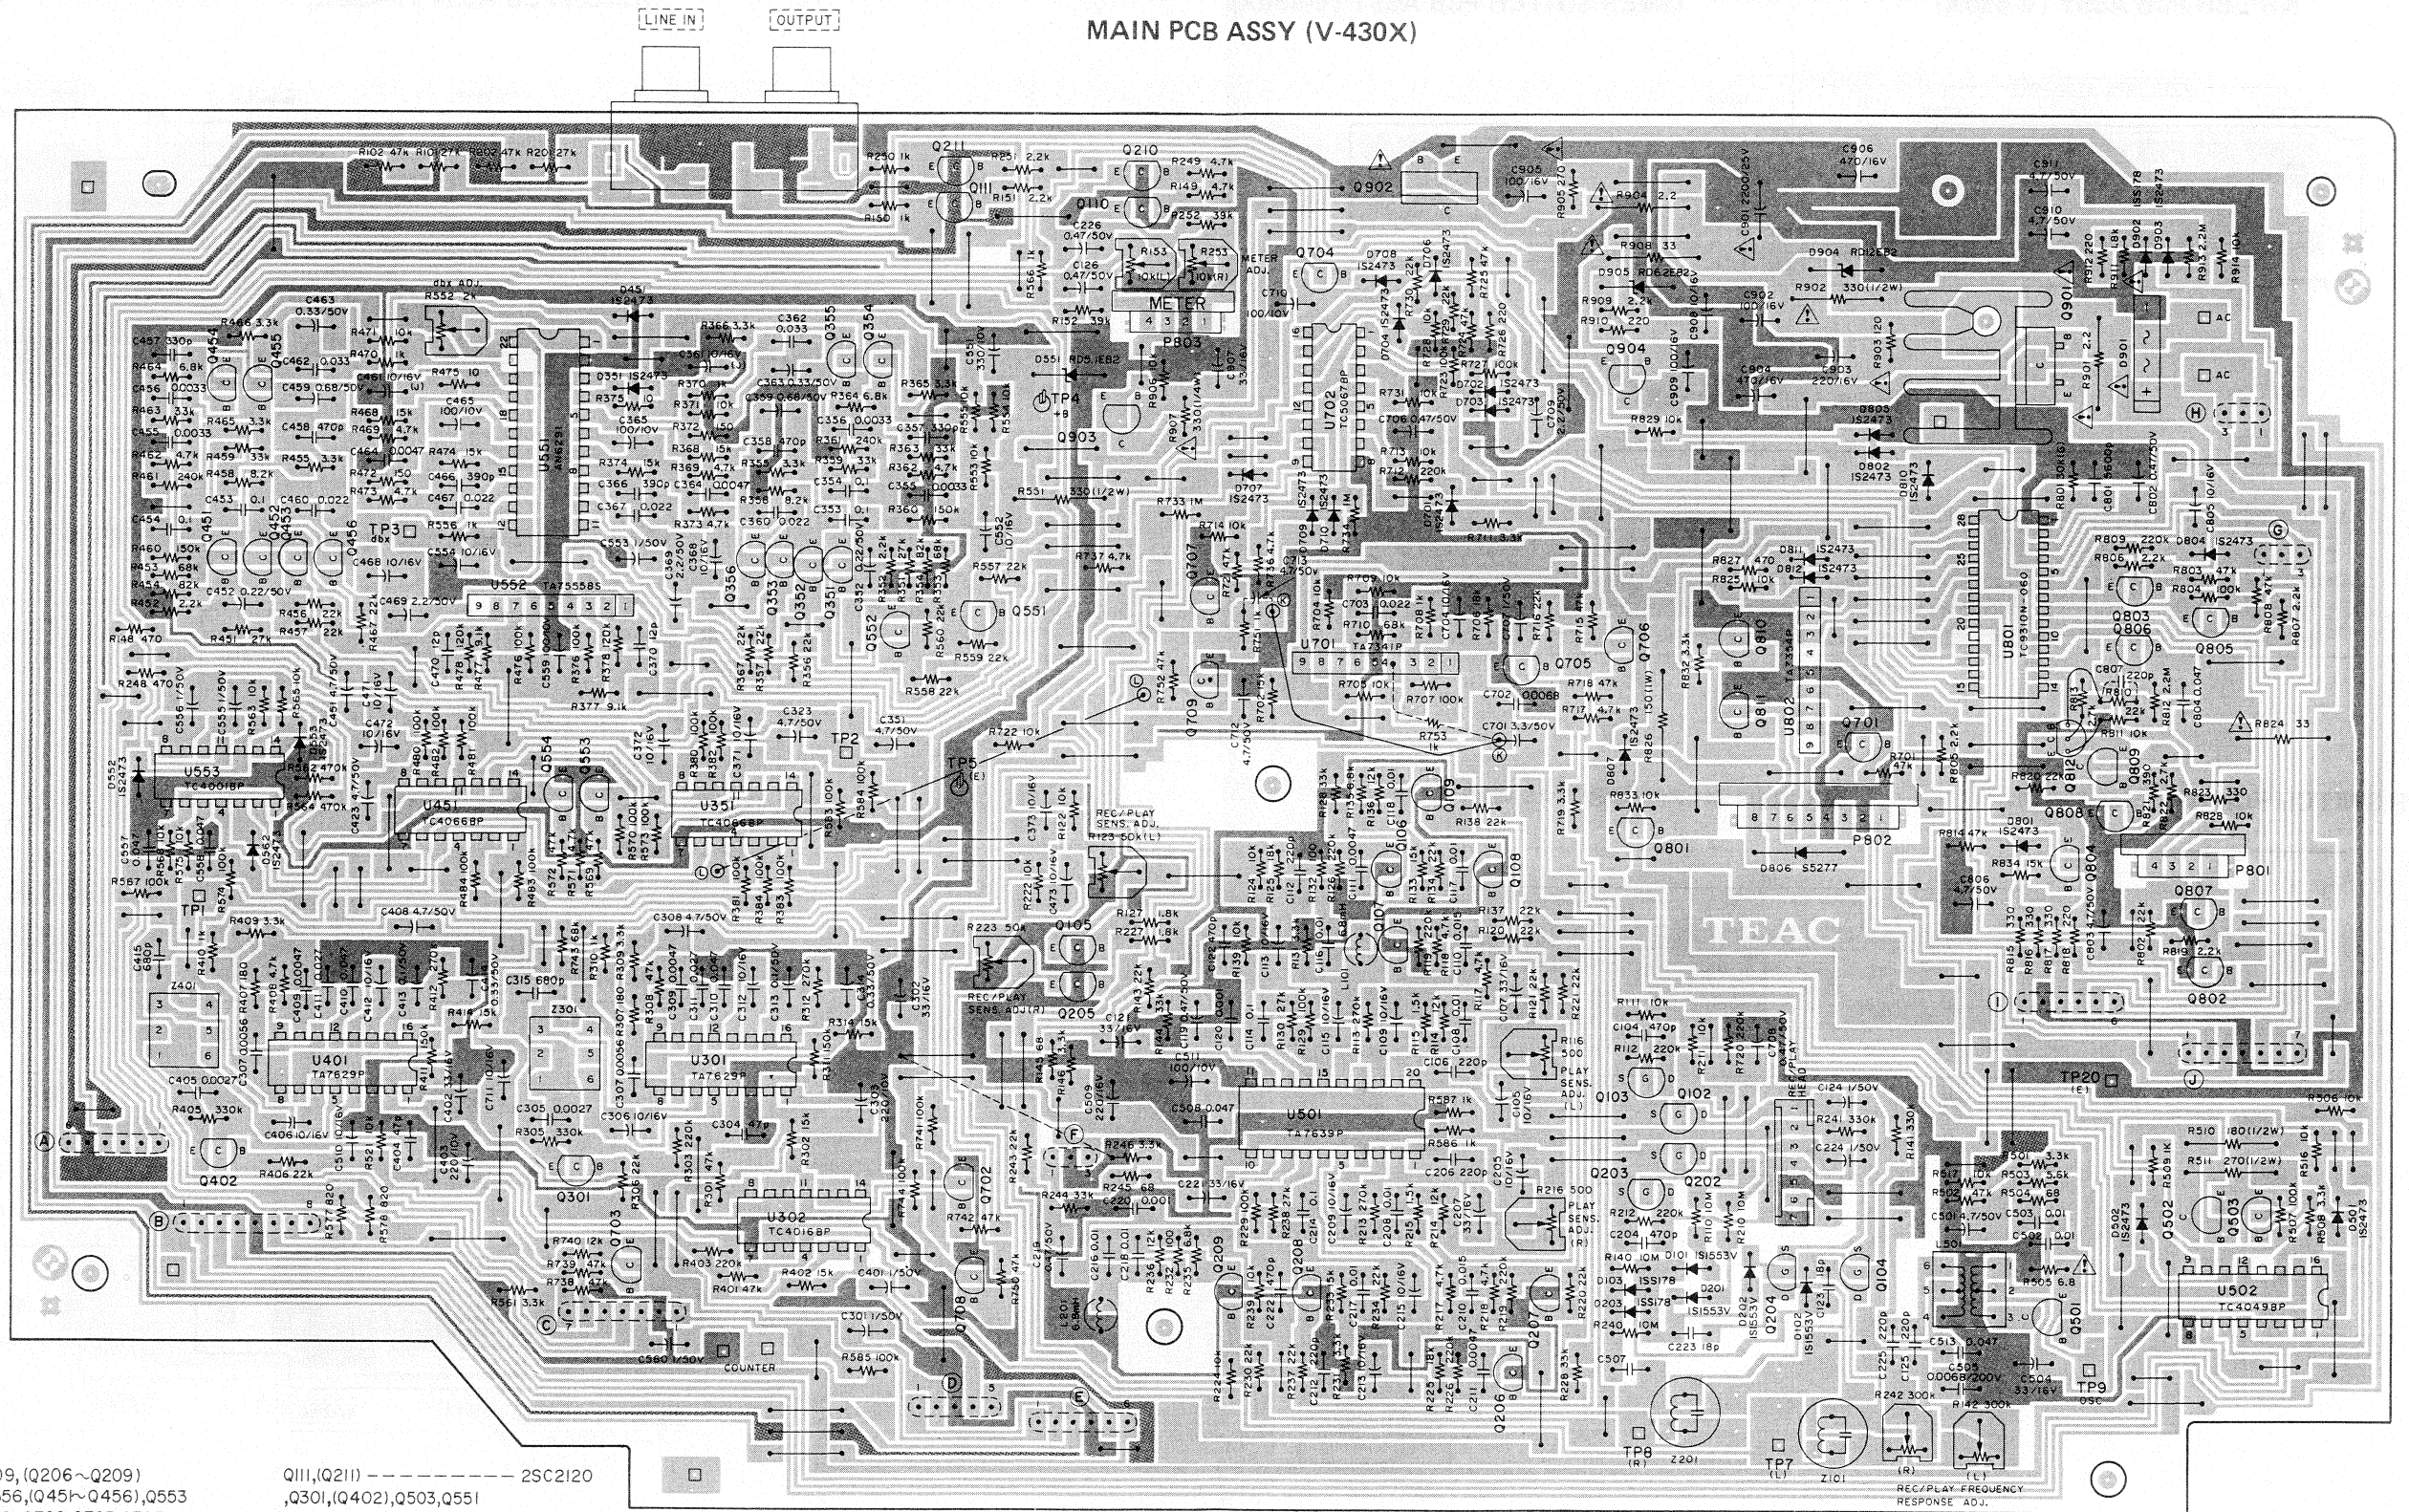

Q106~Q109, (Q206~Q209)  
 ,Q351~Q356, (Q451~Q456), Q553  
 ,Q554, Q701, Q702, Q705, Q707~Q709  
 ,Q802, Q803, Q808, Q811, Q812  
 ----- 2SC1815  
 Q102, Q103, (Q202, Q203) ----- 2SK246  
 Q104, (Q204), ----- 2SJ103  
 Q105, (Q205), Q110, (Q210) ----- 2SC2878

Q111, (Q211) ----- 2SC2120  
 ,Q301, (Q402), Q503, Q551  
 ,Q552, Q703, Q704, Q706  
 ,Q804~Q806 ----- 2SA1015  
 Q501, Q809, Q904 ----- 2SC1627A  
 Q502 ----- 2SA966  
 Q801 ----- 2SA562 TM  
 Q807, Q810 ----- 2SC1959  
 Q901, Q902 ----- 2SC1173  
 Q903 ----- 2SC2236





## Amplifier Section (V-530X)

REF. NO.	PARTS NO.	DESCRIPTION
	*5760770000	PCB Assy
	*5760672400	PCB
<b>MAIN PCB ASSY</b>		
<b>IC's</b>		
U301/U401	5760670400	HA12058NT
U351/U451	5220013400	TC4066BP
U501	5760669800	TA7639P
U502	5220020000	TC4049BP
U551	5220423100	AN6291
U552, U703	5760669600	TA75558S
U553	5220019000	TC4001BP
U701	5220021500	M51143AL-MQS
U702	5760722900	TC5067BP
<b>TRANSISTORS</b>		
Q102/Q202	5232005200	FET, 2SK246-GR
Q103/Q203	5232005800	FET, 2SK117-GR
Q104/Q204	5760667500	FET, 2SJ103-GR
Q105/Q205	5230774900	2SC2878-A
Q106/Q206	5145151000	2SC1815NEW-GR
Q107/Q207	5145151000	2SC1815NEW-GR
Q108/Q208	5145151000	2SC1815NEW-GR
Q109/Q209	5145151000	2SC1815NEW-GR
Q110/Q210	5230777700	2SC2120-Y
Q111/Q211	5230774900	2SC2878-A
Q301/Q401	5145151000	2SC1815NEW-GR
Q302/Q402	5145150000	2SA1015-GR
Q303/Q403	5145151000	2SC1815NEW-GR
Q351/Q451	5145151000	2SC1815NEW-GR
Q352/Q452	5145151000	2SC1815NEW-GR
Q353/Q453	5145151000	2SC1815NEW-GR
Q354/Q454	5145151000	2SC1815NEW-GR
Q355/Q455	5145151000	2SC1815NEW-GR
Q356/Q456	5145150000	2SC1815NEW-GR
Q501	5760667700	2SC1627A-Y
Q502	5760668000	2SA966-Y
Q503	5145150000	2SA1015-GR
Q504	5145151000	2SC1815NEW-GR
Q551, Q552	5145150000	2SA1015-GR
Q553, Q554	5145151000	2SC1815NEW-GR
Q701	5760667500	FET, 2SJ103-GR
Q702/Q703	5145151000	2SC1815NEW-GR
Q704	5145150000	2SA1015-GR
Q705	5145151000	2SC1815NEW-GR
Q706	5145150000	2SA1015-GR
Q707, Q708	5145151000	2SC1815NEW-GR
Q901, Q902	△ 5760668100	2SC1173-Y, X, JA
Q903	△ 5760668100	2SC1173-Y, X, JA
Q904	△ 5760667800	2SC2236-Y
Q905	5145151000	2SC1815NEW-GR
<b>DIODES</b>		
D101/D201	5760668300	1SS178 (TPA4)
D102/D202	5760668300	1SS178 (TPA4)
D103/D203	5760668300	1SS178 (TPA4)
D351/D451	5224012920	1S2473FT
D501, D502	5224012920	1S2473FT

REF. NO.	PARTS NO.	DESCRIPTION
D551	5224540301	Zener, RD5.1EB2FR
D552, D553	5224012920	1S2473FT
D562	5224012920	1S2473FT
D701, D702	5224012920	1S2473FT
D703, D704	5224012920	1S2473FT
D705, D706	5224012920	1S2473FT
D707, D708	5224012920	1S2473FT
D709, D710	5224012920	1S2473FT
D901	△ 5760670300	KBP01
D902	5760668300	1SS178 (TPA4)
D903	5224012920	1S2473FT
D904	5224543101	Zener, RD12EB2FR
D905	5224540901	Zener, RD6.2EB2FR
<b>CARBON RESISTORS</b>		
All resistors are rated ±5% tolerance and 1/6 watt unless otherwise noted.		
R101/R201	5240031420	22kΩ
R102/R202	5240033020	100kΩ
R110/R210	5240177800	10MΩ
R111/R211	5240030620	10kΩ
R112/R212	5240033820	220kΩ
R113/R213	5240034020	270kΩ
R114/R214	5240030820	12kΩ
R117/R217	5240029820	4.7kΩ
R118/R218	5240029620	3.9kΩ
R119/R219	5240033820	220kΩ
R120/R220	5240031420	22kΩ
R121/R221	5240028820	1.8kΩ
R122/R222	5240030620	10kΩ
R124/R224	5240030620	10kΩ
R125/R225	5240031220	18kΩ
R126/R226	5240034220	330kΩ
R127/R227	5240029020	2.2kΩ
R128/R228	5240031420	22kΩ
R129/R229	5240033020	100kΩ
R130/R230	5240031620	27kΩ
R131/R231	5240029420	3.3kΩ
R132/R232	5240026220	150Ω
R133/R233	5240031020	15kΩ
R134/R234	5240031420	22kΩ
R135/R235	5240030220	6.8kΩ
R136/R236	5240029620	3.9Ω
R137/R237	5240031420	22kΩ
R138/R238	5240031420	22kΩ
R139/R239	5240030620	10kΩ
R140/R240	5240177800	10MΩ
R141/R241	5240034220	330kΩ
R143/R243	5240031420	22kΩ
R144/R244	5240031820	33kΩ
R145/R245	5240025420	68Ω
R148/R248	5240027420	470Ω
R149/R249	5240029220	2.7kΩ
R150/R250	5240028220	1kΩ
R151/R251	5240029820	4.7kΩ
R152/R252	5240031420	22kΩ
R154/R254	5240029420	3.3kΩ
R301/R401	5240033420	150kΩ
R302/R402	5240029420	3.3kΩ
R303/R403	5240029420	3.3kΩ
R304/R404	5240030020	5.6kΩ
R305/R405	5240034220	330kΩ

Parts marked with \* require longer delivery time.

# V-530X/V-430X

REF. NO.	PARTS NO.	DESCRIPTION			
R306/R406	5240031420	22k $\Omega$			
R307/R407	5240030620	10k $\Omega$			
R308/R408	5240030620	10k $\Omega$			
R309/R409	5240030420	8.2k $\Omega$	1/4W	2%	
R310/R410	5240029420	3.3k $\Omega$	1/4W	2%	
R311/R411	5240031520	24k $\Omega$	1/4W		
R312/R412	5240030120	6.2k $\Omega$	1/4W		
R313/R413	5240032820	82k $\Omega$			
R314/R414	5240036120	2M $\Omega$	1/4W		
R315/R415	5240029820	4.7k $\Omega$			
R316/R416	5240030620	10k $\Omega$			
R317/R417	5240032620	68k $\Omega$			
R318/R418	5240027420	470 $\Omega$			
R319/R419	5240032220	47k $\Omega$	1/4W	2%	
R320/R420	5240030120	6.2k $\Omega$	1/4W		
R321/R421	5240032820	82k $\Omega$			
R322/R422	5240028220	1k $\Omega$			
R323/R423	5240029420	3.3k $\Omega$			
R351/R451	5240031620	27k $\Omega$			
R352/R452	5240029020	2.2k $\Omega$			
R353/R453	5240032620	68k $\Omega$			
R354/R454	5240032820	82k $\Omega$			
R355/R455	5240029420	3.3k $\Omega$			
R356/R456	5240031420	22k $\Omega$			
R357/R457	5240031420	22k $\Omega$			
R358/R458	5240030420	8.2k $\Omega$			
R359/R459	5240031820	33k $\Omega$			
R360/R460	5240033420	150k $\Omega$			
R361/R461	5240033920	240k $\Omega$	1/4W		
R362/R462	5240029820	4.7k $\Omega$			
R363/R463	5240031820	33k $\Omega$			
R364/R464	5240030220	6.8k $\Omega$			
R365/R465	5240029420	3.3k $\Omega$			
R366/R466	5240029420	3.3k $\Omega$			
R367/R467	5240031420	22k $\Omega$			
R368/R468	5240031020	15k $\Omega$			
R369/R469	5240029820	4.7k $\Omega$			
R370/R470	5240028220	1k $\Omega$			
R371/R471	5240030620	10k $\Omega$			
R372/R472	5240026220	150 $\Omega$			
R373/R473	5240029820	4.7k $\Omega$			
R374/R474	5240031020	15k $\Omega$			
R375/R475	5240023420	10 $\Omega$			
R376/R476	5240033020	100k $\Omega$			
R377/R477	5240030520	9.1k $\Omega$	1/4W		
R378/R478	5240033220	120k $\Omega$			
R380/R480	5240033020	100k $\Omega$			
R381/R481	5240033020	100k $\Omega$			
R382/R482	5240033020	100k $\Omega$			
R383/R483	5240033020	100k $\Omega$			
R384/R484	5240033020	100k $\Omega$			
R501	5240029420	3.3k $\Omega$	1/8W		
R502	5240032220	47k $\Omega$			
R503	5240030020	5.6k $\Omega$			
R504	5240025420	68 $\Omega$			
R505	△ 5760674700	6.8 $\Omega$	1/4W		
R506	5240030620	10k $\Omega$			
R507	5240033020	100k $\Omega$			
R508	5240029420	3.3k $\Omega$			
R509	5240028220	1k $\Omega$			

REF. NO.	PARTS NO.	DESCRIPTION			
R510	5185694000	180 $\Omega$	1/2W		
R511	5185698000	270 $\Omega$	1/2W		
R516, R517	5240030620	10k $\Omega$			
R518	5240029820	4.7k $\Omega$			
R519	5240031420	22k $\Omega$			
R522	5240030620	10k $\Omega$			
R551	5180070000	330 $\Omega$	1/2W		
R553, R554	5240030620	10k $\Omega$			
R555	5240030620	10k $\Omega$			
R556	5240068220	1k $\Omega$	1/4W	2%	
R557, R558	5240031420	22k $\Omega$			
R559, R560	5240031420	22k $\Omega$			
R561	5240029420	3.3k $\Omega$			
R562	5240034620	470k $\Omega$			
R563	5240030620	10k $\Omega$			
R564	5240034620	470k $\Omega$			
R565	5240030620	10k $\Omega$			
R566	5240028220	1k $\Omega$			
R567	5240033020	100k $\Omega$			
R568	5240030620	10k $\Omega$			
R569	5240032220	47k $\Omega$			
R570	5240033020	100k $\Omega$			
R571	5240029820	4.7k $\Omega$			
R572	5240032220	47k $\Omega$			
R573, R574	5240033020	100k $\Omega$			
R575	5240030620	10k $\Omega$			
R701	5240029820	4.7k $\Omega$			
R702	5240033020	100k $\Omega$			
R703	5240033820	220k $\Omega$			
R704	5240034620	470k $\Omega$			
R705	5240033820	220k $\Omega$			
R706	5240033420	150k $\Omega$			
R707	5240031420	22k $\Omega$			
R708	5240031820	33k $\Omega$			
R709	5240032220	47k $\Omega$			
R710	5240029820	4.7k $\Omega$			
R711	5240029420	3.3k $\Omega$			
R712	5240033820	220k $\Omega$			
R713, R714	5240030620	10k $\Omega$			
R715	5240032220	47k $\Omega$			
R716	5240031420	22k $\Omega$			
R717	5240029820	4.7k $\Omega$			
R718	5240032220	47k $\Omega$			
R719	5240029420	3.3k $\Omega$			
R720	5240033820	220k $\Omega$			
R721	5240032220	47k $\Omega$			
R722	5240030620	10k $\Omega$			
R723	5240033020	100k $\Omega$			
R724, R725	5240029820	4.7k $\Omega$			
R726	5240033820	220k $\Omega$			
R727	5240033020	100k $\Omega$			
R728	5240030620	10k $\Omega$			
R729, R730	5240031420	22k $\Omega$			
R731	5240032220	47k $\Omega$			
R732	5240030620	10k $\Omega$			
R733, R734	5240035420	1M $\Omega$			
R735	5240030620	10k $\Omega$			
R736, R737	5240029820	4.7k $\Omega$			
R738	5240030620	10k $\Omega$			
R739	5240029820	4.7k $\Omega$			

REF. NO.	PARTS NO.	DESCRIPTION		
R740, R741	5240030620	10k $\Omega$		
R742	5240025820	100 $\Omega$		
R743	5240026820	270 $\Omega$		
R751	5240033020	100k $\Omega$		
R776	5240027420	470 $\Omega$		
R777	5240032220	47k $\Omega$		
R901	▲ 5760674400	1 $\Omega$	1/4W	
R902	▲ 5180070000	330 $\Omega$	1/2W	
R903	▲ 5240025820	100 $\Omega$		
R904	▲ 5760674400	1 $\Omega$	1/4W	
R905	▲ 5240025820	100 $\Omega$		
R906	▲ 5760674500	2.2 $\Omega$	1/4W	
R907	5240027820	680 $\Omega$	1/4W	
R908	▲ 5180070000	330 $\Omega$	1/2W	
R909	▲ 5760674400	1 $\Omega$	1/4W	
R910	▲ 5240027020	330 $\Omega$		
R911	5240030620	10k $\Omega$		
R912	5240028620	1.5k $\Omega$		
R913	5240026620	220 $\Omega$		
R914	5240176200	2.2M $\Omega$	1/4W	
R915	5240033020	100k $\Omega$	1/4W	
R916	5240030220	6.8k $\Omega$	1/4W	
R917	5240027420	470 $\Omega$	1/4W	
<b>CAPACITORS</b>				
C104/C204	5172220000	Ceramic	470pF	50V
C105/C205	5260162550	Elec.	10 $\mu$ F	16V
C106/C206	5172216000	Ceramic	220pF	50V
C107/C207	5260164250	Elec.	33 $\mu$ F	16V
C108/C208	5171856000	Mylar	0.01 $\mu$ F	50V 5%
C109/C209	5260164250	Elec.	33 $\mu$ F	16V
C110/C210	5171860000	Mylar	0.015 $\mu$ F	50V 5%
C111/C211	5170368000	Mylar	0.0047 $\mu$ F	50V 5%
C112/C212	5172216000	Ceramic	220pF	50V
C113/C213	5260162550	Elec.	10 $\mu$ F	16V
C114/C214	5171878000	Mylar	0.1 $\mu$ F	50V 5%
C115/C215	5260162550	Elec.	10 $\mu$ F	16V
C116/C216	5171856000	Mylar	0.01 $\mu$ F	50V 5%
C117/C217	5171856000	Mylar	0.01 $\mu$ F	50V 5%
C118/C218	5171856800	Mylar	0.01 $\mu$ F	100V 5%
C119/C219	5260160550	Elec.	0.47 $\mu$ F	50V
C120/C220	5172224000	Ceramic	0.001 $\mu$ F	50V
C121/C221	5260164252	Elec.	33 $\mu$ F	16V
C122/C222	5170352800	Ceramic	470pF	100V
C123/C223	5172203000	Ceramic	18pF	50V
C124/C224	5260160750	Elec.	1 $\mu$ F	50V
C125/C225	5172216000	Ceramic	220pF	50V
C126/C226	5260160550	Elec.	0.47 $\mu$ F	50V
C301/C401	5260160750	Elec.	1 $\mu$ F	50V
C302/C402	5172216000	Mylar	220pF	50V
C303/C403	5260162550	Elec.	10 $\mu$ F	16V
C304/C404	5170364000	Mylar	0.0033 $\mu$ F	50V 5%
C305/C405	5260160750	Elec.	1 $\mu$ F	50V
C306/C406	5172216000	Ceramic	220pF	50V
C307/C407	5263104120	Poly.	0.033 $\mu$ F	100V 2%
C308/C408	5171856000	Mylar	0.01 $\mu$ F	50V 5%
C309/C409	5171862000	Mylar	0.018 $\mu$ F	50V 5%
C310/C410	5260220852	Elec.	0.33 $\mu$ F	50V
C311/C411	5260220652	Elec.	0.15 $\mu$ F	50V
C312/C412	5260160550	Elec.	0.47 $\mu$ F	50V

REF. NO.	PARTS NO.	DESCRIPTION		
C313/C413	5260221052	Elec.	0.68 $\mu$ F	50V
C314/C414	5260162150	Elec.	4.7 $\mu$ F	50V
C315/C415	5172208000	Ceramic	47pF	50V 5%
C316/C416	5170370000	Mylar	0.0056 $\mu$ F	50V 5%
C317/C417	5173432000	Ceramic	0.0047 $\mu$ F	50V
C318/C418	5170374000	Mylar	0.0082 $\mu$ F	50V 5%
C319/C419	5260162150	Elec.	4.7 $\mu$ F	50V
C320/C420	5263105110	Poly.	0.082 $\mu$ F	100V 5%
C321/C421	5260220652	Elec.	0.15 $\mu$ F	50V
C322/C422	5260160550	Elec.	0.47 $\mu$ F	50V
C323/C423	5260162150	Elec.	4.7 $\mu$ F	50V
C324/C424	5260166052	Elec.	100 $\mu$ F	16V
C325/C425	5260166852	Elec.	220 $\mu$ F	10V
C326/C426	5260162150	Elec.	4.7 $\mu$ F	50V
C351/C451	5260162150	Elec.	4.7 $\mu$ F	50V
C352/C452	5260210650	Elec.	0.22 $\mu$ F	50V
C353/C453	5171878000	Mylar	0.1 $\mu$ F	50V 5%
C354/C454	5171878000	Mylar	0.1 $\mu$ F	50V 5%
C355/C455	5170364000	Mylar	0.0033 $\mu$ F	50V 5%
C356/C456	5170364000	Mylar	0.0033 $\mu$ F	50V 5%
C357/C457	5263106620	Poly.	330pF	50V 5%
C358/C458	5263107020	Poly.	470pF	50V 5%
C359/C459	5260210050	Elec.	0.68 $\mu$ F	50V
C360/C460	5171864000	Mylar	0.022 $\mu$ F	50V 5%
C361/C461	5260162550	Elec.	10 $\mu$ F	16V
C362/C462	5171868000	Mylar	0.033 $\mu$ F	50V 5%
C363/C463	5260210850	Elec.	0.33 $\mu$ F	50V
C364/C464	5170368000	Mylar	0.0047 $\mu$ F	50V 5%
C365/C465	5260165952	Elec.	100 $\mu$ F	10V
C366/C466	5263106820	Poly.	390pF	50V 5%
C367/C467	5171864000	Mylar	0.022 $\mu$ F	50V 5%
C368/C468	5260162550	Elec.	10 $\mu$ F	16V
C369/C469	5260161150	Elec.	2.2 $\mu$ F	50V
C370/C470	5172201000	Ceramic	12pF	50V 5%
C371/C471	5260162550	Elec.	10 $\mu$ F	16V
C372/C472	5260162550	Elec.	10 $\mu$ F	16V
C373/C473	5260162550	Elec.	10 $\mu$ F	16V
C501	5260162150	Elec.	4.7 $\mu$ F	50V
C502, C503	5171856000	Mylar	0.01 $\mu$ F	50V 5%
C504	5260166052	Elec.	100 $\mu$ F	16V
C505	5263101720	Poly.	0.0033 $\mu$ F	100V 5%
C507, C508	5173435000	Ceramic	0.047 $\mu$ F	50V
C509	5173054800	Elec.	220 $\mu$ F	16V
C510	5260164252	Elec.	33 $\mu$ F	16V
C511	5260165952	Elec.	100 $\mu$ F	10V
C513	5173435000	Ceramic	0.0047 $\mu$ F	50V
C514	5260166052	Elec.	100 $\mu$ F	16V
C551	5173063000	Elec.	330 $\mu$ F	10V
C552	5260162550	Elec.	10 $\mu$ F	16V
C553	5260160750	Elec.	1 $\mu$ F	50V
C554	5260162550	Elec.	10 $\mu$ F	16V
C555, C556	5260160750	Elec.	1 $\mu$ F	50V
C557, C558	5173435000	Ceramic	0.047 $\mu$ F	50V
C559	5260165952	Elec.	100 $\mu$ F	10V
C701	5173432000	Ceramic	0.0047 $\mu$ F	50V
C702	5260160750	Elec.	1 $\mu$ F	50V
C703	5263166723	Mylar	0.01 $\mu$ F	25V
C704, C705	5173435000	Ceramic	0.047 $\mu$ F	50V
C706	5260160550	Elec.	0.47 $\mu$ F	50V
C707	5260160750	Elec.	1 $\mu$ F	50V



REF. NO.	PARTS NO.	DESCRIPTION
C708	5260160550	Elec. 0.47=F 50V
C709	5260160750	Elec. 1μF 50V
C710, C711	5260165952	Elec. 100μF 10V
C712	5260162550	Elec. 10μF 16V
C713	5172200000	Ceramic 10pF 50V 0.5%
C751, C752	5260164252	Elec. 33μF 16V
C901	5173094000	Elec. 3300μF 25V
C902, C903	5173072000	Elec. 470μF 16V
C904	5173072000	Elec. 470μF 16V
C905	5260166052	Elec. 100μF 16V
C906	5260165952	Elec. 100μF 16V
C907	5260164252	Elec. 33μF 16V
C908	5260165952	Elec. 100μF 16V
C909, C910	5260162150	Elec. 4.7μF 50V
C911, C950	5260164252	Elec. 33μF 16V
<b>VARIABLE RESISTORS</b>		
R116/R216	5280020500	Semi-fixed, 470Ω (B)
R123/R223	5280021700	Semi-fixed, 47kΩ (B)
R142/R242	5280022200	Semi-fixed, 330kΩ (B)
R153/R253	5280021300	Semi-fixed, 10kΩ (B)
R552	5280021000	Semi-fixed, 3.3kΩ (B)
<b>COILS</b>		
L101/L201	5760674200	Choke, 6.8mH
L501	5760674300	Bias OSC
Z101/Z201	5760670600	Bias Trap
<b>CONNECTORS</b>		
	5760671200	7P
	5760671200	Socket, Jump
	5760670600	Socket, Jump
	5760671800	Socket, Jump
<b>MISCELLANEOUS</b>		
Z301/Z401	5760670700	Filter, Dolby C
Z302/Z402	5760670800	Filter, Dolby
J001	5760672100	Jack, US-4P
<b>MIC AMPL. PCB ASSY</b>		
<b>TRANSISTORS</b>		
Q101/Q201	5230770400	2SC1815NEW-BL
<b>CARBON RESISTORS</b>		
All resistors are rated ±5% tolerance and 1/6 watt unless otherwise noted.		
R200	5240026620	220Ω 1/4W
R103/R203	5240029820	4.7kΩ
R104/R204	5240032020	39kΩ
R105/R205	5240033820	220kΩ
R106/R206	5240024620	33Ω
R107/R207	5240030020	5.6kΩ
R108/R208	5240032220	47kΩ

REF. NO.	PARTS NO.	DESCRIPTION
<b>CAPACITORS</b>		
C101/C201	5260161550	Elec. 3.3μF 50V
C102/C202	5172216000	Ceramic 220pF 50V
C103/C203	5260161550	Elec. 3.3μF 50V
C506	5260164252	Elec. 33μF 16V
<b>MISCELLANEOUS</b>		
J002	5760673400	Jack, PHONES
J003	5760673300	Jack, MIC x 2
<b>NR SWITCH PCB ASSY</b>		
<b>DIODES</b>		
D554, D555	5224012920	1S2473FT
D556, D557	5224012920	1S2473FT
<b>RESISTORS</b>		
All resistors are rated ±5% tolerance and 1/6 watt.		
R520	5240030620	10kΩ
R521	5240030820	12kΩ
R576	5240030220	6.8kΩ
<b>CAPACITOR</b>		
C512	5260162550	Elec. 10μF 16V
<b>MISCELLANEOUS</b>		
S001 ~ S005	5760672800	Switch, Push
<b>NR LED PCB ASSY</b>		
<b>DIODES</b>		
D503, D504	5760668800	LED, TLR205
D505	5760668800	LED, TLR205
D558, D559	5760669000	LED, TLG205-F
D560, D561	5760669000	LED, TLG205-F
<b>RESISTORS</b>		
All resistors are rated ±5% tolerance and 1/6 watt.		
R512, R513	5240028620	1.5kΩ
R514	5240028620	1.5kΩ
R577, R578	5240028020	820Ω
R579, R580	5240028020	820Ω
<b>REC VR PCB ASSY</b>		
R109/R209	5760725000	Var. Res., Slide; 100kΩ (B) x 2
R10	5760724200	Var. Res., Slide; 20kΩ (B)
<b>OUTPUT VR PCB ASSY</b>		
R02	5760725100	Var. Res., 10kΩ (A) x 2
<b>SWITCH &amp; LED PCB ASSY</b>		
D820, D821	5760668800	LED, TLR205
S801, S802	5760672600	Switch, Key
S803	5760672600	Switch, Key
<b>TIMER SWITCH PCB ASSY</b>		
S808	5760673000	Switch, Slide

## Control Section (V-530X)

REF. NO.	PARTS NO.	DESCRIPTION
	*5760770100	PCB ASSY
	*5760672500	PCB
<b>LOGIC PCB ASSY</b>		
<b>IC's</b>		
U801	5760669900	TC9310N-060
U802	5760670500	LM6402H-431
U803	5220019700	LC7800
U804	5220020000	TC4049BP
U805	5760669200	TD62305P
U806	5760669300	TD62703P
U807	5760669500	TA7354P
U809	5220019000	TC4001BP
U810	5760670100	TC4516BP
<b>TRANSISTORS</b>		
Q801	5145143000	2SC1959-Y
Q802	5145143000	2SC1959-Y
Q803	5197060000	2SC1627-Y
Q804	5145151000	2SC1815NEW-GR
Q805	5145150000	2SA1015-GR
Q806	5760668200	2SD1140
Q807	5145151000	2SC1815NEW-GR
Q808, Q809	5145150000	2SA1015-GR
Q810	5145150000	2SA1015-GR
Q811, Q812	5145151000	2SC1815NEW-GR
Q813, Q814	5145150000	2SA1015-GR
Q815	5145151000	2SC1815NEW-GR
Q816	5760667900	2SA562TM-Y
Q817	5145151000	2SC1815NEW-GR
<b>DIODES</b>		
D801	5760668600	S5277B
D802, D803	5224012920	1S2473FT
D804, D805	5224012920	1S2473FT
D806, D807	5224012920	1S2473FT
D808, D809	5224012920	1S2473FT
D810, D811	5224012920	1S2473FT
D812, D813	5224012920	1S2473FT
D814, D815	5224012920	1S2473FT
D816	5224012920	1S2473FT
D817	5760668500	1S1555V, LB-10
<b>RESISTORS</b>		
All resistors are rated $\pm 5\%$ tolerance, 1/6 watt and are carbon type unless otherwise noted.		
R801	5760723300	150 $\Omega$ 1W Metal Film
R802, R803	5240029020	2.2k $\Omega$
R804	5760674600	33 $\Omega$ 1/4W
R805	5181464000	180 $\Omega$ 1/4W
R806	5240026420	180 $\Omega$
R807	5240029820	4.7k $\Omega$
R808	5240027820	680 $\Omega$
R809, R810	5240032220	47k $\Omega$
R811	5240033820	220k $\Omega$
R812	5240031620	27k $\Omega$
R815, R816	5240031420	22k $\Omega$
R817	5240032020	39k $\Omega$
R818	5240033020	100k $\Omega$
R819	5240032220	47k $\Omega$
R820	5240033820	220k $\Omega$

REF. NO.	PARTS NO.	DESCRIPTION
R821	5240071720	30k $\Omega$ 1/4W 2%
R822	5240033420	150k $\Omega$
R823	5240029020	2.2k $\Omega$
R824	5240029820	4.7k $\Omega$
R825	5240031420	22k $\Omega$
R826	5240033020	100k $\Omega$
R827, R828	5240030620	10k $\Omega$
R829	5240030620	10k $\Omega$
R830	5240029820	4.7k $\Omega$
R831, R832	5240034620	470 $\Omega$
R833	5240026820	270 $\Omega$
R834	5240026620	220 $\Omega$
R835	5240025820	100 $\Omega$
R836	5240031620	22k $\Omega$
R837	5240029820	4.7k $\Omega$
R838, R839	5240030620	10k $\Omega$
R840	5240035420	1M $\Omega$
R841	5240030620	10k $\Omega$
R842	5240032220	47k $\Omega$
R843	5240035420	1M $\Omega$
R844	5240030620	10k $\Omega$
R845	5240032220	47k $\Omega$
R846	5240031420	22k $\Omega$
R847, R848	5240028620	1.5k $\Omega$
R849, R850	5240027420	470 $\Omega$
R851, R852	5240027420	470 $\Omega$
R853, R854	5240027420	470 $\Omega$
R855	5240027420	470 $\Omega$
R856	5240028620	1.5k $\Omega$
R857	5240033020	100k $\Omega$
R858	5240028220	1k $\Omega$
R859	5240032620	68k $\Omega$
R860	5240032220	47k $\Omega$
R861	5240033020	100k $\Omega$
R862	5240033820	220k $\Omega$
R863	5240028220	1k $\Omega$
R864	5240032620	68k $\Omega$
R865	5240030620	10k $\Omega$
R866	5240029420	3.3k $\Omega$
R867	5240028220	1k $\Omega$
R868	5240029020	2.2k $\Omega$
R869, R870	5240030620	10k $\Omega$
R871	5240033020	100k $\Omega$
R872	5240030620	10k $\Omega$
R873	5240033020	100k $\Omega$
R875	5240030620	10k $\Omega$ 1/4W
R891, R892	5240028620	1.5k $\Omega$
R893	5240028220	1k $\Omega$
<b>CAPACITORS</b>		
C801	5170370800	Mylar 0.0056 $\mu$ F 100V 5%
C802, C803	5173435000	Ceramic 0.047 $\mu$ F 50V
C804	5260160752	Elec. 1 $\mu$ F 50V
C805	5260161552	Elec. 3.3 $\mu$ F 50V
C806	5260162152	Elec. 4.7 $\mu$ F 50V
C807	5173433000	Ceramic 0.01 $\mu$ F 50V
C808	5260160550	Elec. 0.47 $\mu$ F 50V
C809	5173435000	Ceramic 0.047 $\mu$ F 50V
C810	5173433000	Ceramic 0.01 $\mu$ F 50V
C811, C812	5172216000	Ceramic 220pF 50V

Parts marked with \* require longer delivery time.

# V-530X/V-430X

REF NO.	PARTS NO.	DESCRIPTION
C813	5173433000	Ceramic 0.01 $\mu$ F 50V
C814	5173071800	Elec. 470 $\mu$ F 10V
C815	5173072800	Elec. 470 $\mu$ F 16V
C816, C817	5260161552	Elec. 3.3 $\mu$ F 50V
C818	5260161552	Elec. 3.3 $\mu$ F 50V
C819	5172224000	Ceramic 0.001 $\mu$ F
C820, C821	5260160752	Elec. 1 $\mu$ F 50V
C822	5260162152	Elec. 4.7 $\mu$ F 50V
C823	5172212000	Ceramic 100pF 50V
C824	5172220000	Ceramic 470pF 50V
C825	5260161552	Elec. 3.3 $\mu$ F 50V
<b>CONNECTORS</b>		
P801	5760671700	Socket, Jump; 8P
P802	5760671400	Socket, Jump; 5P
P804	5760671200	Socket, Jump; 3P
P805	5760671900	Socket, Jump; 10P
P806	5760671300	Socket, Jump; 4P
P807	5760671400	Socket, Jump; 5P
P808	5760671500	Socket, Jump; 6P
P809	5760671200	Socket, Jump; 3P
P810	5760671600	Socket, Jump; 7P
P811	5760671500	Socket, Jump; 6P
P812	5760671600	Socket, Jump; 7P
P813	5760671500	Socket, Jump; 6P
<b>MISCELLANEOUS</b>		
Z801	5760670900	X'tal, CS8800
U808	5760723200	Resistor Array, 10k $\Omega$ x 4
<b>SWITCH PCB ASSY</b>		
<b>DIODES</b>		
D822	5760668900	LED, TLG123A-F-E/F
D823	5760668700	LED, TLR123
D824, D825	5760668800	LED, TLR205
D826	5760669100	TLG4125, Tape Counter
<b>RESISTORS</b>		
R890	5240025820	100 $\Omega$
R891, R892	5240028620	1.5k $\Omega$
<b>MISCELLANEOUS</b>		
S804, S805	5760672600	Switch, Key
S806, S807	5760672600	Switch, Key
S808, S809	5760672600	Switch, Key
S810, S811	5760672600	Switch, Key
S812	5760662600	Switch, Key

## Amplifier/Control (V-430X)

REF. NO.	PARTS NO.	DESCRIPTION
	*5760770010	PCB Assy
	*5760672300	PCB
<b>MAIN PCB ASS'Y</b>		
<b>IC's</b>		
U301/U401	5760669700	TA7629P
U302	5760670000	TC4016BP
U351/U451	5220013400	TC4066BP
U501	5760669800	TA7639P
U502	5220020000	TC4049BP
U551	5220423100	AN6291
U552	5760669600	TA7555S
U553	5220019000	TC4001BP
U701	5760669400	TA7341P
U702	5760722900	TC5067BP
U801	5760669900	TC9310N-060
U802	5760669500	TA7354P
<b>TRANSISTORS</b>		
Q102/Q202	5232005200	FET, 2SK246-GR
Q103/Q203	5232005200	FET, 2SK246-GR
Q104/Q204	5760667500	FET, 2SJ103-GR
Q105/Q205	5230774900	2SC2878-A
Q106/Q206	5145151000	2SC1815NEW-GR
Q107/Q207	5145151000	2SC1815NEW-GR
Q108/Q208	5145151000	2SC1815NEW-GR
Q109/Q209	5145151000	2SC1815NEW-GR
Q110/Q210	5230774900	2SC2878-A
Q111/Q211	5230777700	2SC2120-Y
Q301/Q402	5145150000	2SA1015-GR
Q351/Q451	5145151000	2SC1815NEW-GR
Q352/Q452	5145151000	2SC1815NEW-GR
Q353/Q453	5145151000	2SC1815NEW-GR
Q354/Q454	5145151000	2SC1815NEW-GR
Q355/Q455	5145151000	2SC1815NEW-GR
Q356/Q456	5145150000	2SC1815NEW-GR
Q501	5760667700	2SC1627A-Y
Q502	5760668000	2SA966-Y
Q503	5145150000	2SA1015-GR
Q551/Q552	5145150000	2SA1015-GR
Q553/Q554	5145151000	2SC1815NEW-GR
Q701	5145151000	2SC1815NEW-GR
Q702	5145151000	2SC1815NEW-GR
Q703	5145150000	2SA1015-GR
Q704	5145150000	2SA1015-GR
Q705	5145151000	2SC1815NEW-GR
Q706	5145150000	2SA1015-GR
Q707/Q708	5145151000	2SC1815NEW-GR
Q709	5145151000	2SC1815NEW-GR
Q801	5042352000	2SA562TM-Y
Q802, Q803	5145151000	2SC1815NEW-GR
Q804, Q805	5145150000	2SA1015-GR
Q806	5145150000	2SA1015-GR
Q807	5145143000	2SC1959NEW-Y
Q808	5145151000	2SC1815NEW-GR
Q809	5760667700	2SC1627A-Y
Q810	5145143000	2SC1959NEW-Y
Q811, Q812	5145151000	2SC1815NEW-GR
Q901, Q902	5760668100	2SC1173-Y, X, JA
Q903	△ 5760667800	2SC2236-Y
Q904	5760667700	2SA1627A-Y

Parts marked with \* require longer delivery time.

REF. NO.	PARTS NO.	DESCRIPTION
<b>DIODES</b>		
D101/D201	5760668400	1S1553V
D102/D202	5760668300	1SS178 (TPA4)
D103/D203	5760668300	1SS178 (TPA4)
D351/D451	5224012920	1S2473FT
D501, D502	5224012920	1S2473FT
D551	5224540301	Zener, RD5.1EB2FR
D552, D553	5224012920	1S2473FT
D562	5224012920	1S2473FT
D701, D702	5224012920	1S2473FT
D703, D704	5224012920	1S2473FT
D706	5224012920	1S2473FT
D707, D708	5224012920	1S2473FT
D709, D710	5224012920	1S2473FT
D801, D802	5224012920	1S2473FT
D804, D805	5224012920	1S2473FT
D806	5224012600	S5277
D807, D808	5224012920	1S2473FT
D810, D811	5224012920	1S2473FT
D812	5224012920	1S2473FT
D901	△ 5760670300	KBP01
D902	△ 5760668300	1SS178 (TPA4)
D903	5224012920	1S2473FT
D904	5224543101	Zener, RD12EB2FR
D905	5224540901	Zener, RD6.2EB2FR
<b>CARBON RESISTORS</b>		
All resistors are rated ±5% tolerance and 1/6 watt unless otherwise noted.		
R101/R201	5240031620	27kΩ
R102/R202	5240032220	47kΩ
R110/R210	5240177800	10MΩ
R111/R211	5240030620	10kΩ
R112/R212	5240033820	220kΩ
R113/R213	5240034020	270kΩ
R114/R214	5240030820	12kΩ
R115/R215	5240028620	1.5kΩ
R117/R217	5240029820	4.7kΩ
R118/R218	5240029820	4.7kΩ
R119/R219	5240033820	220kΩ
R120/R220	5240031420	22kΩ
R121/R221	5240031420	22kΩ
R122/R222	5240030620	10kΩ
R124/R224	5240030620	10kΩ
R125/R225	5240031220	18kΩ
R126/R226	5240033820	220kΩ
R127/R227	5240028820	1.8kΩ
R128/R228	5240031820	33kΩ
R129/R229	5240033020	100kΩ
R130/R230	5240031620	27kΩ
R131/R231	5240029420	3.3kΩ
R132/R232	5240025820	100Ω
R133/R233	5240031020	15kΩ
R134/R234	5240031420	22kΩ
R135/R235	5240030220	6.8kΩ
R136/R236	5240030820	12kΩ
R137/R237	5240031420	22kΩ
R138/R238	5240031420	22kΩ
R139/R239	5240030620	10kΩ

# V-530X/V-430X

REF. NO.	PARTS NO.	DESCRIPTION		
R140/R240	5240177800	10M $\Omega$	1/4W	5%
R141/R241	5240034220	330k $\Omega$		
R143/R243	5240031420	22k $\Omega$		
R144/R244	5240031820	33k $\Omega$		
R145/R245	5240025420	68 $\Omega$		
R146/R246	5240029420	3.3k $\Omega$		
R148/R248	5240027420	470 $\Omega$		
R149/R249	5240029820	4.7k $\Omega$		
R150/R250	5240028220	1k $\Omega$		
R151/R251	5240029020	2.2k $\Omega$		
R152/R252	5240032020	39k $\Omega$		
R301/R401	5240032220	47k $\Omega$		
R302/R402	5240031020	15k $\Omega$		
R303/R403	5240033820	220k $\Omega$		
R305/R405	5240034220	330k $\Omega$		
R306/R406	5240031420	22k $\Omega$		
R307/R407	5240026420	180 $\Omega$		
R308/R408	5240032220	47k $\Omega$		
R309/R409	5240029420	3.3k $\Omega$		
R310/R410	5240028220	1k $\Omega$		
R311/R411	5240033420	150k $\Omega$		
R312/R412	5240034020	270k $\Omega$		
R314/R414	5240031020	15k $\Omega$		
R351/R451	5240031620	27k $\Omega$		
R352/R452	5240029020	2.2k $\Omega$		
R353/R453	5240032620	68k $\Omega$		
R354/R454	5240032820	82k $\Omega$		
R355/R455	5240029420	3.3k $\Omega$		
R356/R456	5240031420	22k $\Omega$		
R357/R457	5240031420	22k $\Omega$		
R358/R458	5240030420	8.2k $\Omega$		
R359/R459	5240031820	33k $\Omega$		
R360/R460	5240033420	150k $\Omega$		
R361/R461	5240033920	240k $\Omega$	1/4W	
R362/R462	5240039820	4.7k $\Omega$		
R363/R463	5240031820	33k $\Omega$		
R364/R464	5240030220	6.8k $\Omega$		
R365/R465	5240029420	3.3k $\Omega$		
R366/R466	5240029420	3.3k $\Omega$		
R367/R467	5240031420	22k $\Omega$		
R368/R468	5240031020	15k $\Omega$		
R369/R469	5240029820	4.7k $\Omega$		
R370/R470	5240028220	1k $\Omega$		
R371/R471	5240030620	10k $\Omega$		
R372/R472	5240026220	150 $\Omega$		
R373/R473	5240029820	4.7k $\Omega$		
R374/R474	5240031020	15k $\Omega$		
R375/R475	5240023420	10 $\Omega$		
R376/R476	5240033020	100k $\Omega$		
R377/R477	5240030520	9.1k $\Omega$	1/4W	
R378/R478	5240033220	120k $\Omega$		
R380/R480	5240033020	100k $\Omega$		
R381/R481	5240033020	100k $\Omega$		
R382/R482	5240033020	100k $\Omega$		
R383/R483	5240033020	100k $\Omega$		
R384/R484	5240033020	100k $\Omega$		
R501	5240029420	3.3k $\Omega$	1/8W	
R502	5240032220	47k $\Omega$		
R503	5240030020	5.6k $\Omega$		
R504	5240025420	68 $\Omega$		

REF. NO.	PARTS NO.	DESCRIPTION		
R505	$\Delta$ 5760674700	6.8 $\Omega$	1/4W	
R506	5240030620	10k $\Omega$		
R507	5240033020	100k $\Omega$		
R508	5240029420	3.3k $\Omega$		
R509	5240028220	1k $\Omega$		
R510	5185694000	180 $\Omega$	1/2W	
R511	5185698000	270 $\Omega$	1/2W	
R516, R517	5240030620	10k $\Omega$		
R521	5240030620	10k $\Omega$		
R522	5240030620	10k $\Omega$		
R551	5180070000	330 $\Omega$	1/2W	
R553, R554	5240030620	10k $\Omega$		
R555	5240030620	10k $\Omega$		
R556	5240068220	1k $\Omega$	1/4W	2%
R557, R558	5240031420	22k $\Omega$		
R559, R560	5240031420	22k $\Omega$		
R561	5240029420	3.3k $\Omega$		
R562	5240034620	470k $\Omega$		
R563	5240030620	10k $\Omega$		
R564	5240034620	470k $\Omega$		
R565	5240030620	10k $\Omega$		
R566	5240028220	1k $\Omega$		
R567	5240033020	100k $\Omega$		
R568	5240030620	10k $\Omega$		
R569	5240032220	47k $\Omega$		
R570	5240033020	100k $\Omega$		
R571	5240029820	4.7k $\Omega$		
R572	5240032220	47k $\Omega$		
R573, R574	5240033020	100k $\Omega$		
R575	5240030620	10k $\Omega$		
R577, R578	5240028020	820 $\Omega$		
R583, R584	5240033020	100k $\Omega$		
R585	5240033020	100k $\Omega$		
R586, R587	5240028220	1k $\Omega$		
R701	5240032220	47k $\Omega$		
R702	5240031020	15k $\Omega$		
R704	5240030620	10k $\Omega$		
R705	5240030820	12k $\Omega$		
R706	5240031220	18k $\Omega$		
R707	5240033020	100k $\Omega$		
R708	5240028220	1k $\Omega$		
R709	5240030620	10k $\Omega$		
R710	5240032620	68k $\Omega$		
R711	5240029420	3.3k $\Omega$		
R712	5240033820	220k $\Omega$		
R713, R714	5240030620	10k $\Omega$		
R715	5240032220	47k $\Omega$		
R716	5240031420	22k $\Omega$		
R717	5240032220	47k $\Omega$		
R718	5240032220	47k $\Omega$		
R719	5240029420	3.3k $\Omega$		
R720	5240033820	220k $\Omega$		
R721	5240032220	47k $\Omega$		
R722	5240030620	10k $\Omega$		
R723	5240033020	100k $\Omega$		
R724, R725	5240032220	47k $\Omega$		
R726	5240033820	220k $\Omega$		
R727	5240033020	100k $\Omega$		
R728	5240030620	10k $\Omega$		
R729, R730	5240031420	22k $\Omega$		

REF. NO.	PARTS NO.	DESCRIPTION	
R731	5240030620	10k $\Omega$	
R733, R734	5240035420	1M $\Omega$	
R736, R737	5240029820	4.7k $\Omega$	
R738	5240029820	4.7k $\Omega$	
R739	5240032220	47k $\Omega$	
R740	5240030820	12k $\Omega$	
R741	5240033020	100k $\Omega$	
R742	5240032220	47k $\Omega$	
R743	5240032620	68k $\Omega$	
R744	5240033020	100k $\Omega$	
R750	5240032220	47k $\Omega$	
R751	5240028220	1k $\Omega$	
R752	5240032220	47k $\Omega$	
R753	5240028220	1k $\Omega$	
R801	5240071720	30k $\Omega$	2%
R802	5240031420	22k $\Omega$	
R803	5240032220	47k $\Omega$	
R804	5240033020	100k $\Omega$	
R805, R806	5240029020	2.2k $\Omega$	
R807	5240029020	2.2k $\Omega$	
R808	5240032220	47k $\Omega$	
R809	5240033820	220k $\Omega$	
R810	5240031420	22k $\Omega$	
R811	5240030620	10k $\Omega$	
R812	5240176200	2.2M $\Omega$	1/4W
R813	5240029220	2.7k $\Omega$	
R814	5240032220	47k $\Omega$	
R815	5240026820	270 $\Omega$	
R816, R817	5240027420	470 $\Omega$	
R818	5240026620	220 $\Omega$	
R819	5240029020	2.2k $\Omega$	
R820	5240031420	22k $\Omega$	
R821	5240027220	390 $\Omega$	
R822	5240029820	4.7k $\Omega$	
R823	5240027020	330 $\Omega$	
R824	△ 5760674600	33 $\Omega$	1/4W
R825	5240030620	10k $\Omega$	
R826	5180062000	150 $\Omega$	1/2W
R827	5240027420	470 $\Omega$	
R828, R829	5240030620	10k $\Omega$	
R832	5240029420	3.3k $\Omega$	
R833	5340030620	10k $\Omega$	
R834	5240031020	15k $\Omega$	
R901	△ 5760674500	2.2 $\Omega$	1/4W
R902	△ 5185700000	330 $\Omega$	1/2W
R903	△ 5240026020	120 $\Omega$	
R904	△ 5760674500	2.2 $\Omega$	1/4W
R905	△ 5240026820	270 $\Omega$	
R906	5240030620	10k $\Omega$	
R907	△ 5181470000	330 $\Omega$	1/4W
R908	△ 5760674600	33 $\Omega$	1/4W
R909	5240029020	2.2k $\Omega$	
R910	5240026620	220 $\Omega$	
R911	5240028820	1.8k $\Omega$	
R912	5240026620	220 $\Omega$	
R913	5240176200	2.2M $\Omega$	1/4W
R914	5240030620	10k $\Omega$	

REF. NO.	PARTS NO.	DESCRIPTION	
<b>CAPACITORS</b>			
C104/C204	5172220000	Ceramic	470pF 50V
C105/C205	5260162550	Elec.	10 $\mu$ F 16V
C106/C206	5172216000	Ceramic	220pF 50V
C107/C207	5260165252	Elec.	47 $\mu$ F 25V
C108/C208	5171856000	Mylar	0.01 $\mu$ F 50V 5%
C109/C209	5260126550	Elec.	10 $\mu$ F 16V
C110/C210	5171860000	Mylar	0.015 $\mu$ F 50V 5%
C111/C211	5170368000	Mylar	0.0047 $\mu$ F 50V 5%
C112/C212	5172216000	Ceramic	220pF 50V
C113/C213	5260162550	Elec.	10 $\mu$ F 16V
C114/C214	5171878000	Mylar	0.1 $\mu$ F 50V 5%
C115/C215	5260162550	Elec.	10 $\mu$ F 16V
C116/C216	5171856000	Mylar	0.01 $\mu$ F 50V 5%
C117/C217	5171856000	Mylar	0.01 $\mu$ F 50V 5%
C118/C218	5171862000	Mylar	0.018 $\mu$ F 50V 5%
C119/C219	5260160550	Elec.	0.47 $\mu$ F 50V
C120/C220	5172224000	Ceramic	0.001 $\mu$ F 50V
C121/C221	5260164252	Elec.	33 $\mu$ F 16V
C122/C222	5172220000	Ceramic	470pF 50V
C123/C223	5172203000	Ceramic	18pF 50V
C124/C224	5260160750	Elec.	1 $\mu$ F 50V
C125/C225	5172216000	Ceramic	220pF 50V
C126/C226	5260160550	Elec.	0.47 $\mu$ F 50V
C301/C401	5260160750	Elec.	1 $\mu$ F 50V
C302/C402	5260164252	Elec.	33 $\mu$ F 16V
C303/C403	5260166852	Elec.	220 $\mu$ F 10V
C304/C404	5172208000	Ceramic	47pF 50V 5%
C305/C405	5170362000	Mylar	0.0027 $\mu$ F 50V 5%
C306/C406	5260162550	Elec.	10 $\mu$ F 16V
C307/C407	5170370000	Mylar	0.0056 $\mu$ F 50V 5%
C308/C408	5260162150	Elec.	4.7 $\mu$ F 50V
C309/C409	5170368000	Mylar	0.047 $\mu$ F 50V 5%
C310/C410	5171872000	Mylar	0.047 $\mu$ F 50V 5%
C311/C411	5171866000	Mylar	0.027 $\mu$ F 50V 5%
C312/C412	5260162550	Elec.	10 $\mu$ F 16V
C313/C413	5260210450	Elec.	0.1 $\mu$ F 50V
C314/C414	5260210850	Elec.	0.33 $\mu$ F 50V
C315/C415	5172222000	Ceramic	680pF 50V
C323/C423	5260162150	Elec.	4.7 $\mu$ F 50V
C351/C451	5260162150	Elec.	4.7 $\mu$ F 50V
C352/C452	5260210650	Elec.	0.22 $\mu$ F 50V
C353/C453	5171878000	Mylar	0.1 $\mu$ F 50V 5%
C354/C454	5171878000	Mylar	0.1 $\mu$ F 50V 5%
C355/C455	5170364000	Mylar	0.0033 $\mu$ F 50V 5%
C356/C456	5170364000	Mylar	0.0033 $\mu$ F 50V 5%
C357/C457	5263106620	Poly.	330pF 50V 5%
C358/C458	5263107020	Poly.	470pF 50V 5%
C359/C459	5260210050	Elec.	0.68pF 50V
C360/C460	5171864000	Mylar	0.022 $\mu$ F 50V 5%
C361/C461	5260162550	Elec.	10 $\mu$ F 16V
C362/C462	5171868000	Mylar	0.033 $\mu$ F 50V 5%
C363/C463	5260210850	Elec.	0.33 $\mu$ F 50V
C364/C464	5170368000	Mylar	0.0047 $\mu$ F 50V 5%
C365/C465	5260165952	Elec.	100 $\mu$ F 10V
C366/C466	5263106820	Poly.	390pF 50V 5%
C367/C467	5171864000	Mylar	0.022 $\mu$ F 50V 5%
C368/C468	5260162550	Elec.	10 $\mu$ F 16V
C369/C469	5260161150	Elec.	2.2 $\mu$ F 50V
C370/C470	5172201000	Ceramic	12pF 50V 5%
C371/C471	5260162550	Elec.	10 $\mu$ F 16V

REF. NO.	PARTS NO.	DESCRIPTION
C372/C472	5260162550	Elec. 10 $\mu$ F 16V
C373/C473	5260162550	Elec. 10 $\mu$ F 16V
C501	5260162150	Elec. 4.7 $\mu$ F 50V
C502, C503	5171856000	Mylar 0.01 $\mu$ F 50V 5%
C504	5260164252	Elec. 33 $\mu$ F 16V
C505	5263102520	Poly. 0.0068 $\mu$ F 100V
C507, C508	5173435000	Ceramic 0.047 $\mu$ F 50V
C509	5173054800	Elec. 220 $\mu$ F 16V
C510	5260162550	Elec. 10 $\mu$ F 16V
C511	5260165952	Elec. 100 $\mu$ F 10V
C513	5173435000	Ceramic 0.047 $\mu$ F 50V
C514	5260166052	Elec. 100 $\mu$ F 16V
C551	5173063000	Elec. 330 $\mu$ F 10V
C552	5260162550	Elec. 10 $\mu$ F 16V
C553	5260160750	Elec. 1 $\mu$ F 50V
C554	5260162550	Elec. 10 $\mu$ F 16V
C555, C556	5260160750	Elec. 1 $\mu$ F 50V
C557, C558	5173435000	Ceramic 0.047 $\mu$ F 50V
C559	5260164252	Elec. 33 $\mu$ F 16V
C560	5260160750	Elec. 1 $\mu$ F 50V
C701	5260161550	Elec. 3.3 $\mu$ F 50V
C702	5170372000	Mylar 0.0068 $\mu$ F 50V
C703	5171864000	Mylar 0.022 $\mu$ F 50V
C704	5260162850	Elec. 10 $\mu$ F 50V
C706	5260160550	Elec. 0.47 $\mu$ F 50V
C707	5260160750	Elec. 1 $\mu$ F 50V
C708	5260160550	Elec. 0.47 $\mu$ F 50V
C709	5260161150	Elec. 2.2 $\mu$ F 50V
C710	5260165952	Elec. 100 $\mu$ F 10V
C711	5260162550	Elec. 10 $\mu$ F 16V
C712, C713	5260162150	Elec. 4.7 $\mu$ F 50V
C801	5171874000	Mylar 0.0047 $\mu$ F 50V
C802	5260160550	Elec. 0.47 $\mu$ F 50V
C803	5260162150	Elec. 4.7 $\mu$ F 50V
C804	5173432000	Ceramic 4700pF
C805	5260162550	Elec. 10 $\mu$ F 16V
C806	5260162150	Elec. 4.7 $\mu$ F 50V
C807	5172216000	Ceramic 220pF
C901	5173089000	Elec. 2200 $\mu$ F 25V
C902, C903	5173054800	Elec. 220 $\mu$ F 16V
C904	5173054800	Elec. 220 $\mu$ F 16V
C905	5260166052	Elec. 100 $\mu$ F 16V
C906	5173072000	Elec. 470 $\mu$ F 16V
C907	5260164252	Elec. 33 $\mu$ F 16V
C908	5260162550	Elec. 10 $\mu$ F 16V
C909	5260165952	Elec. 100 $\mu$ F 10V
C910, C911	5260162150	Elec. 4.7 $\mu$ F 50V
<b>VARIABLE RESISTORS</b>		
R116/R216	5280020500	Semi-fixed, 470 $\Omega$ (B)
R123/R223	5280021700	Semi-fixed, 47k $\Omega$ (B)
R142/R242	5280022200	Semi-fixed, 330k $\Omega$ (B)
R153/R253	5280021300	Semi-fixed, 10k $\Omega$ (B)
R552	5280021000	Semi-fixed, 3.3k $\Omega$ (B)
<b>COILS</b>		
L101/L201	5760674200	Choke, 6.8mH
L501	5760674300	Bias OSC
Z101/Z201	5760670600	Bias Trap

REF. NO.	PARTS NO.	DESCRIPTION
<b>CONNECTORS</b>		
P801, P803	5760671100	7P
P802	5760671300	Socket, Jump; 4P
	5760671700	Socket, Jump; 8P
<b>MISCELLANEOUS</b>		
Z301/Z401	5760670800	Filter, Dolby
J001	5760672100	Jack, US-4P
<b>MIC AMPL. PCB ASSY</b>		
<b>TRANSISTORS</b>		
Q101/Q201	5230770400	2SC1815NEW-BL
<b>CARBON RESISTORS</b>		
All resistors are rated $\pm 5\%$ tolerance and 1/6 watt unless otherwise noted.		
R515	5181466000	220 $\Omega$ 1/4W
R103/R203	5240029820	4.7k $\Omega$
R104/R204	5240032020	39k $\Omega$
R105/R205	5240033820	220k $\Omega$
R106/R206	5240024620	33 $\Omega$
R107/R207	5240030020	5.6k $\Omega$
R108/R208	5240032220	47k $\Omega$
<b>CAPACITORS</b>		
C101/C201	5260161550	Elec. 3.3 $\mu$ F 50V
C102/C202	5172216000	Ceramic 220pF 50V
C103/C203	5260161550	Elec. 3.3 $\mu$ F 50V
C506	5260164252	Elec. 33 $\mu$ F 16V
<b>MISCELLANEOUS</b>		
J002	5760673400	Jack, PHONES
J003	5760673300	Jack, MIC x 2
<b>NR SWITCH PCB ASSY</b>		
<b>DIODES</b>		
D556, D557	5224012920	1S2473FT
<b>RESISTORS</b>		
All resistors are rated $\pm 5\%$ tolerance and 1/6 watt.		
R520	5240030420	8.2k $\Omega$
R580, R581	5240028220	1k $\Omega$
R582	5240028620	1.5k $\Omega$
<b>MISCELLANEOUS</b>		
S551A ~ S551E	5760672700	Switch, Push


REF. NO.	PARTS NO.	DESCRIPTION
<b>NR LED PCB ASSY</b>		
<b>DIODES</b>		
D503, D504	5760668800	LED, TLR205
D505	5760668800	LED, TLR205
D558, D559	5760669000	LED, TLG205-F
D560	5760669000	LED, TLG205-F
<b>RESISTORS</b>		
All resistors are rated $\pm 5\%$ tolerance and 1/6 watt.		
R512, R513	5240028620	1.5k $\Omega$
R514	5240028620	1.5k $\Omega$
R579	5240028020	820 $\Omega$
<b>REC VR PCB ASSY</b>		
R01	5760725000	Var. Res., Slide; 100k $\Omega$ (B) x 2
<b>OUTPUT VR PCB ASSY</b>		
R02	5760725100	Var. Res., 10k $\Omega$ (A) x 2
<b>TIMER SWITCH PCB ASSY</b>		
S808	5760673000	Switch, Slide
<b>SWITCH PCB ASSY</b>		
<b>DIODES</b>		
D816	5225006800	LED, TLG123A
D817	5760668700	LED, TLR123
<b>MISCELLANEOUS</b>		
S801, S802	5760672600	Switch, Key
S803, S804	5760672600	Switch, Key
<b>SWITCH &amp; LED PCB ASSY</b>		
<b>DIODES</b>		
D818, D819	5760668800	LED, TLR205
<b>MISCELLANEOUS</b>		
S805, S806	5760672600	Switch, Key
S807	5760672600	Switch, Key
<b>POWER SWITCH PCB ASSY</b>		
C001	5760769100	Capacitor, Ceramic; 0.047 $\mu$ F 400V
	5760769200	Capacitor, Ceramic; 0.01 $\mu$ F 250V
S001	5760672900	Switch, Push; POWER




## 9 SEMICONDUCTOR ELECTRODES AND IC BLOCK DIAGRAM

半導体の端子外形図及びICブロック・ダイアグラム


LM6402H-431  
(TOP VIEW)

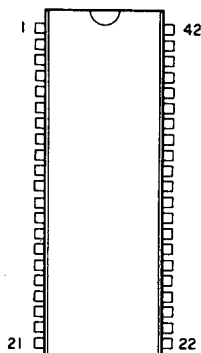


HA12058NT  
(TOP VIEW)




TC9310N-060  
(TOP VIEW)




LC7800  
(TOP VIEW)




AN6291  
(TOP VIEW)




LB1475  
(TOP VIEW)




TC4516BP  
TA7629P  
TC4049BP  
TC5067BP  
TD62305P  
(TOP VIEW)




TC4001BP  
TC4016BP  
TC4066BP  
TD62703P  
(TOP VIEW)




TA7341P  
TA7354P  
TA75558S




M51143AL-MQS




2SC1173

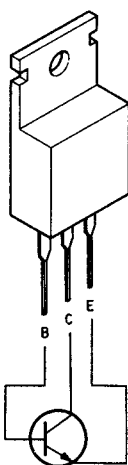


2SC1627A  
2SC2236




2SD1140




2SA1015  
2SC1815  
2SC1959  
2SC2120  
2SC2878




RD5.1EB2FR  
RD6.2EB2FR  
RD12EB2FR



1S2473FT  
1SS178  
1S1555V




KBP01

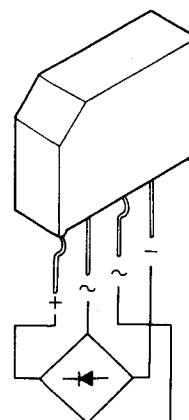


TLR123  
TLG123




TLR205  
TLG205




2SA966  
2SA562




2SK246




2SJ103




TC4016BP/TC4066BP

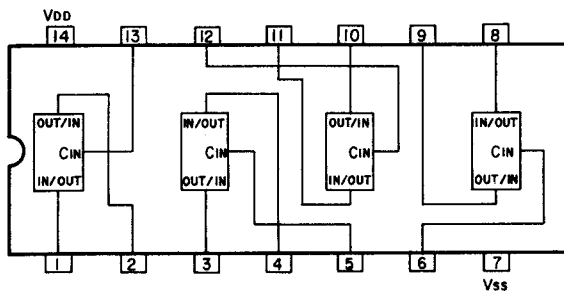


TD62703P

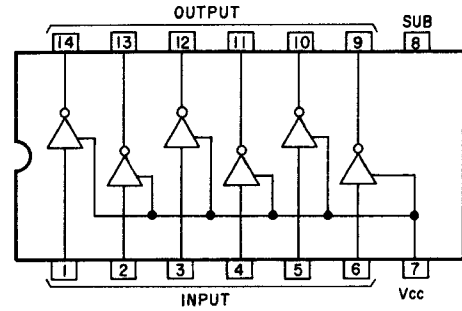


TC4001BP


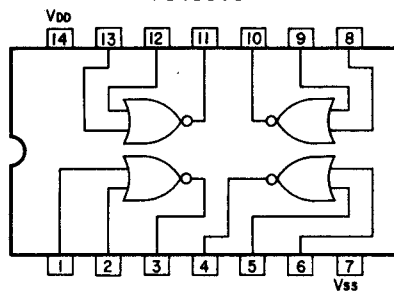





TC4049BP

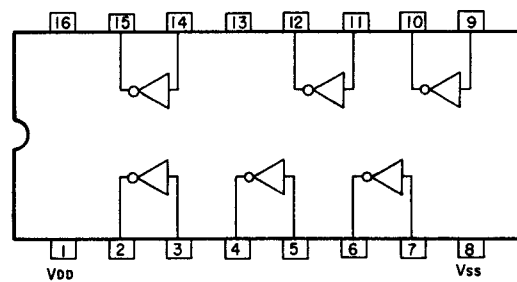

TC4516BP

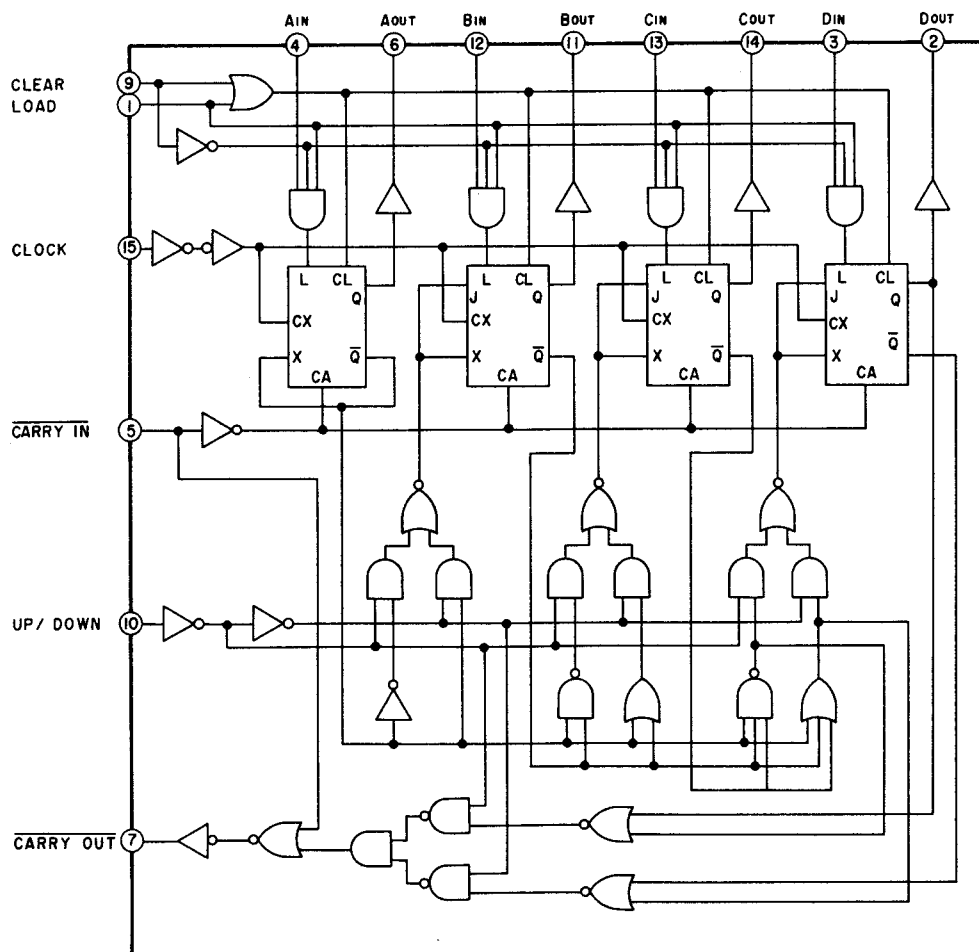

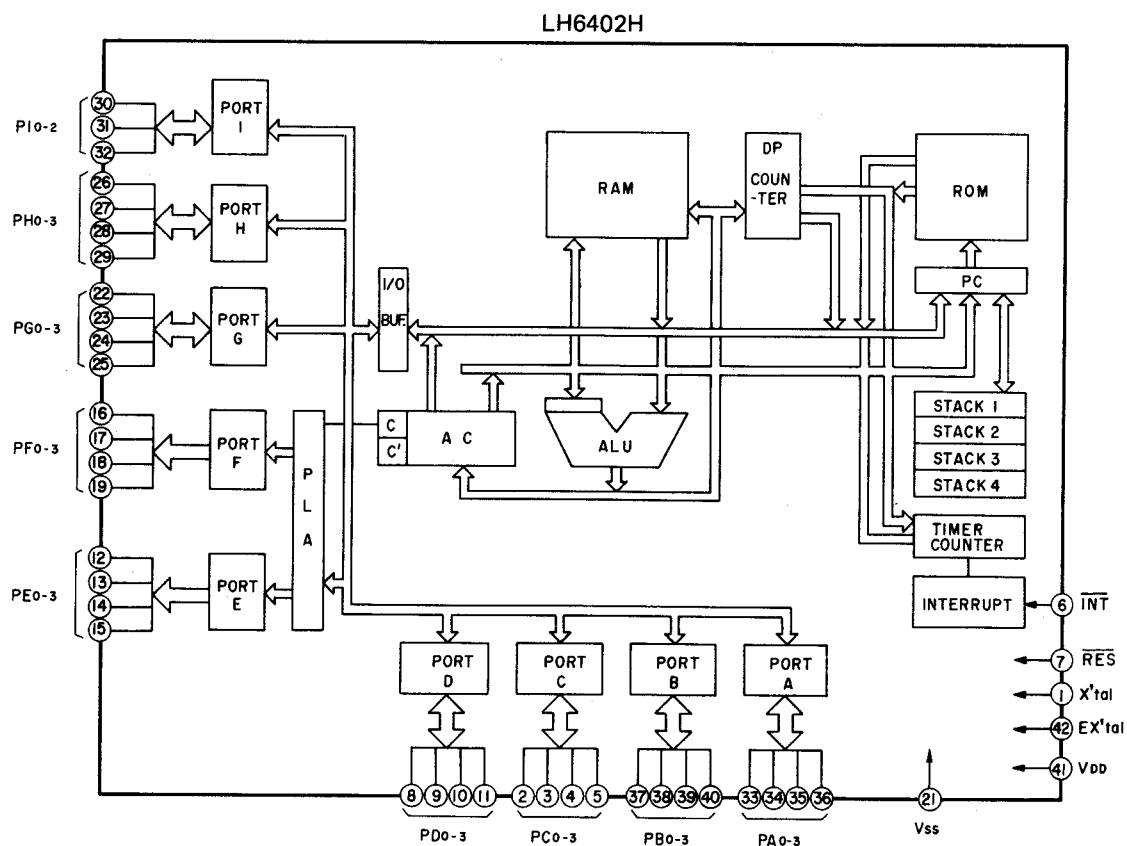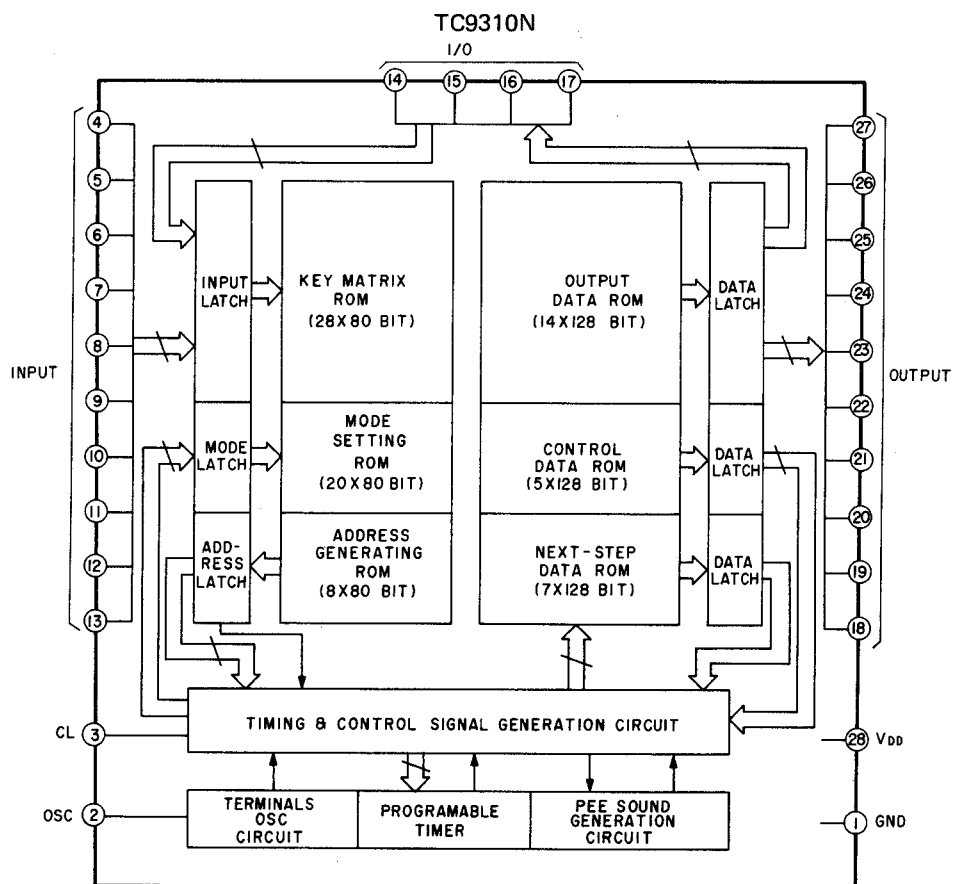

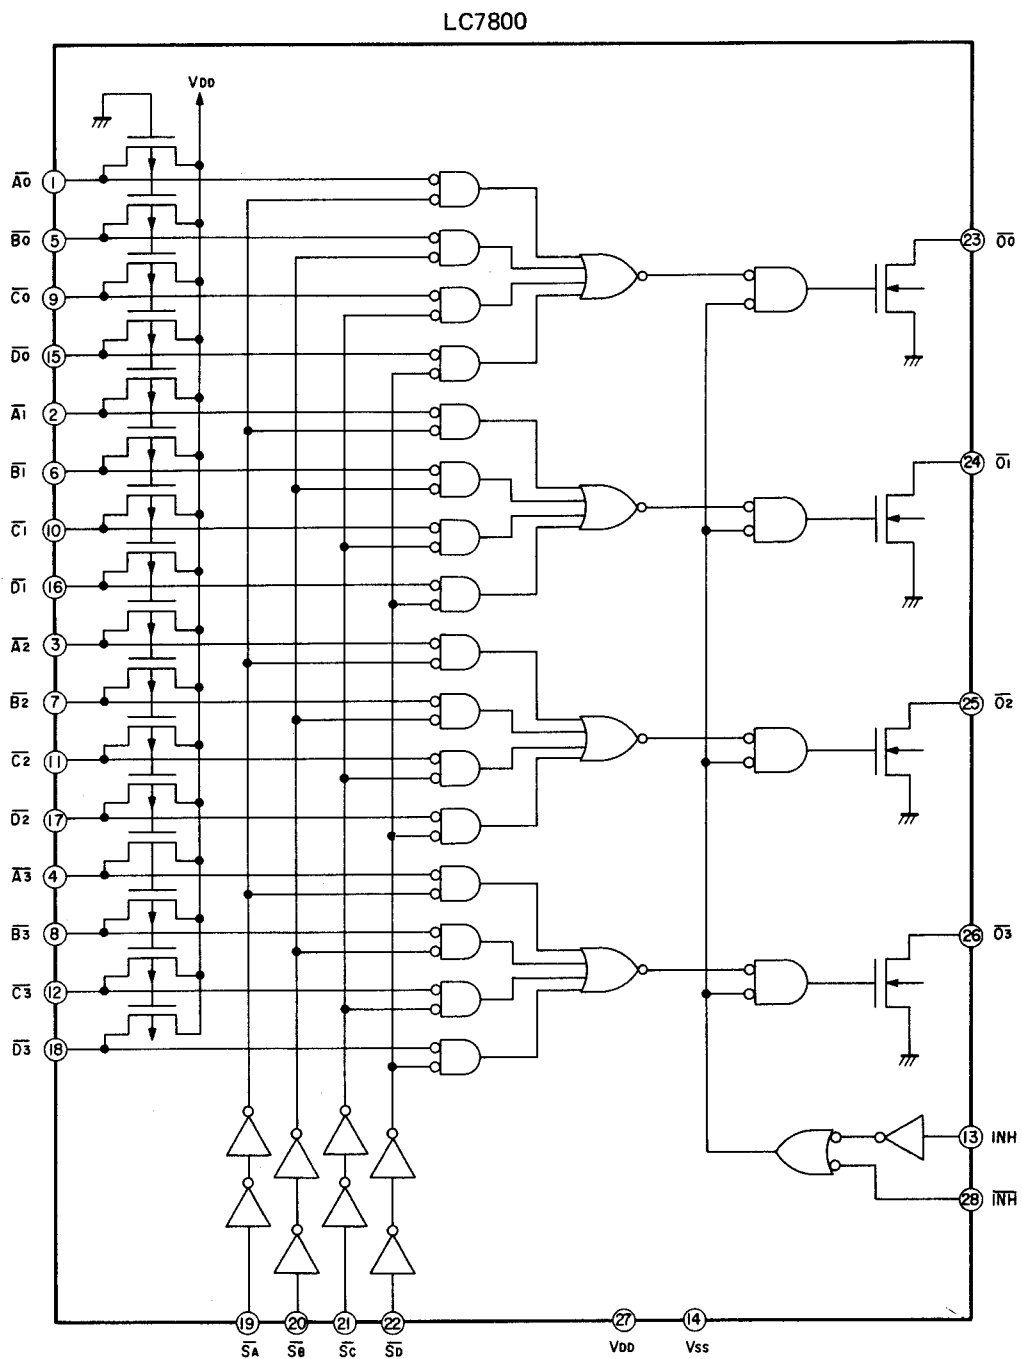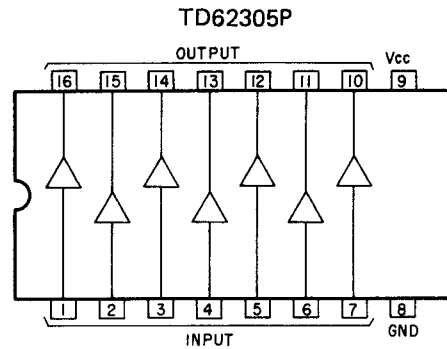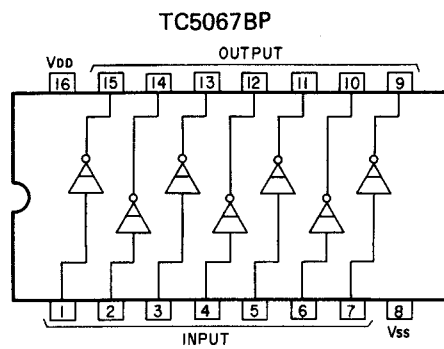





SCHEMATIC DIAGRAMS





V-530X/V-430X

INSTRUCTIONS FOR SERVICE PERSONNEL  
BEFORE RETURNING APPLIANCE TO THE CUSTOMER, MAKE LEAKAGE-  
CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED  
PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT.


NOTES

- 1. Resistor values are in ohms (k = kilo-ohms, M = meg-ohms).
- 2. Capacitor values are in microfarads (p = picofarads).
- 3. Voltage and signal level values are for reference only.  
0 dB = 0.775V
- 4.  : Front panel indication
- 5.  : Rear panel indication
- 6.  : +B power supply circuit
- 7.  Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the appropriate parts list and ensure exact replacement.

注意

- 1. 抵抗の単位はΩ(k=kΩ, M=MΩ)です。
- 2. コンデンサの単位はμF(p=pF)です。
- 3. 電圧及び信号レベルは参考値です。  
0dB=0.775V
- 4.  : フロント・パネル上の表示
- 5.  : リア・パネル上の表示
- 6.  : +B電源回路
- 7.  マークのある部品は安全重要部品です。  
交換するときは必ずティアック指定の部品を使用してください。



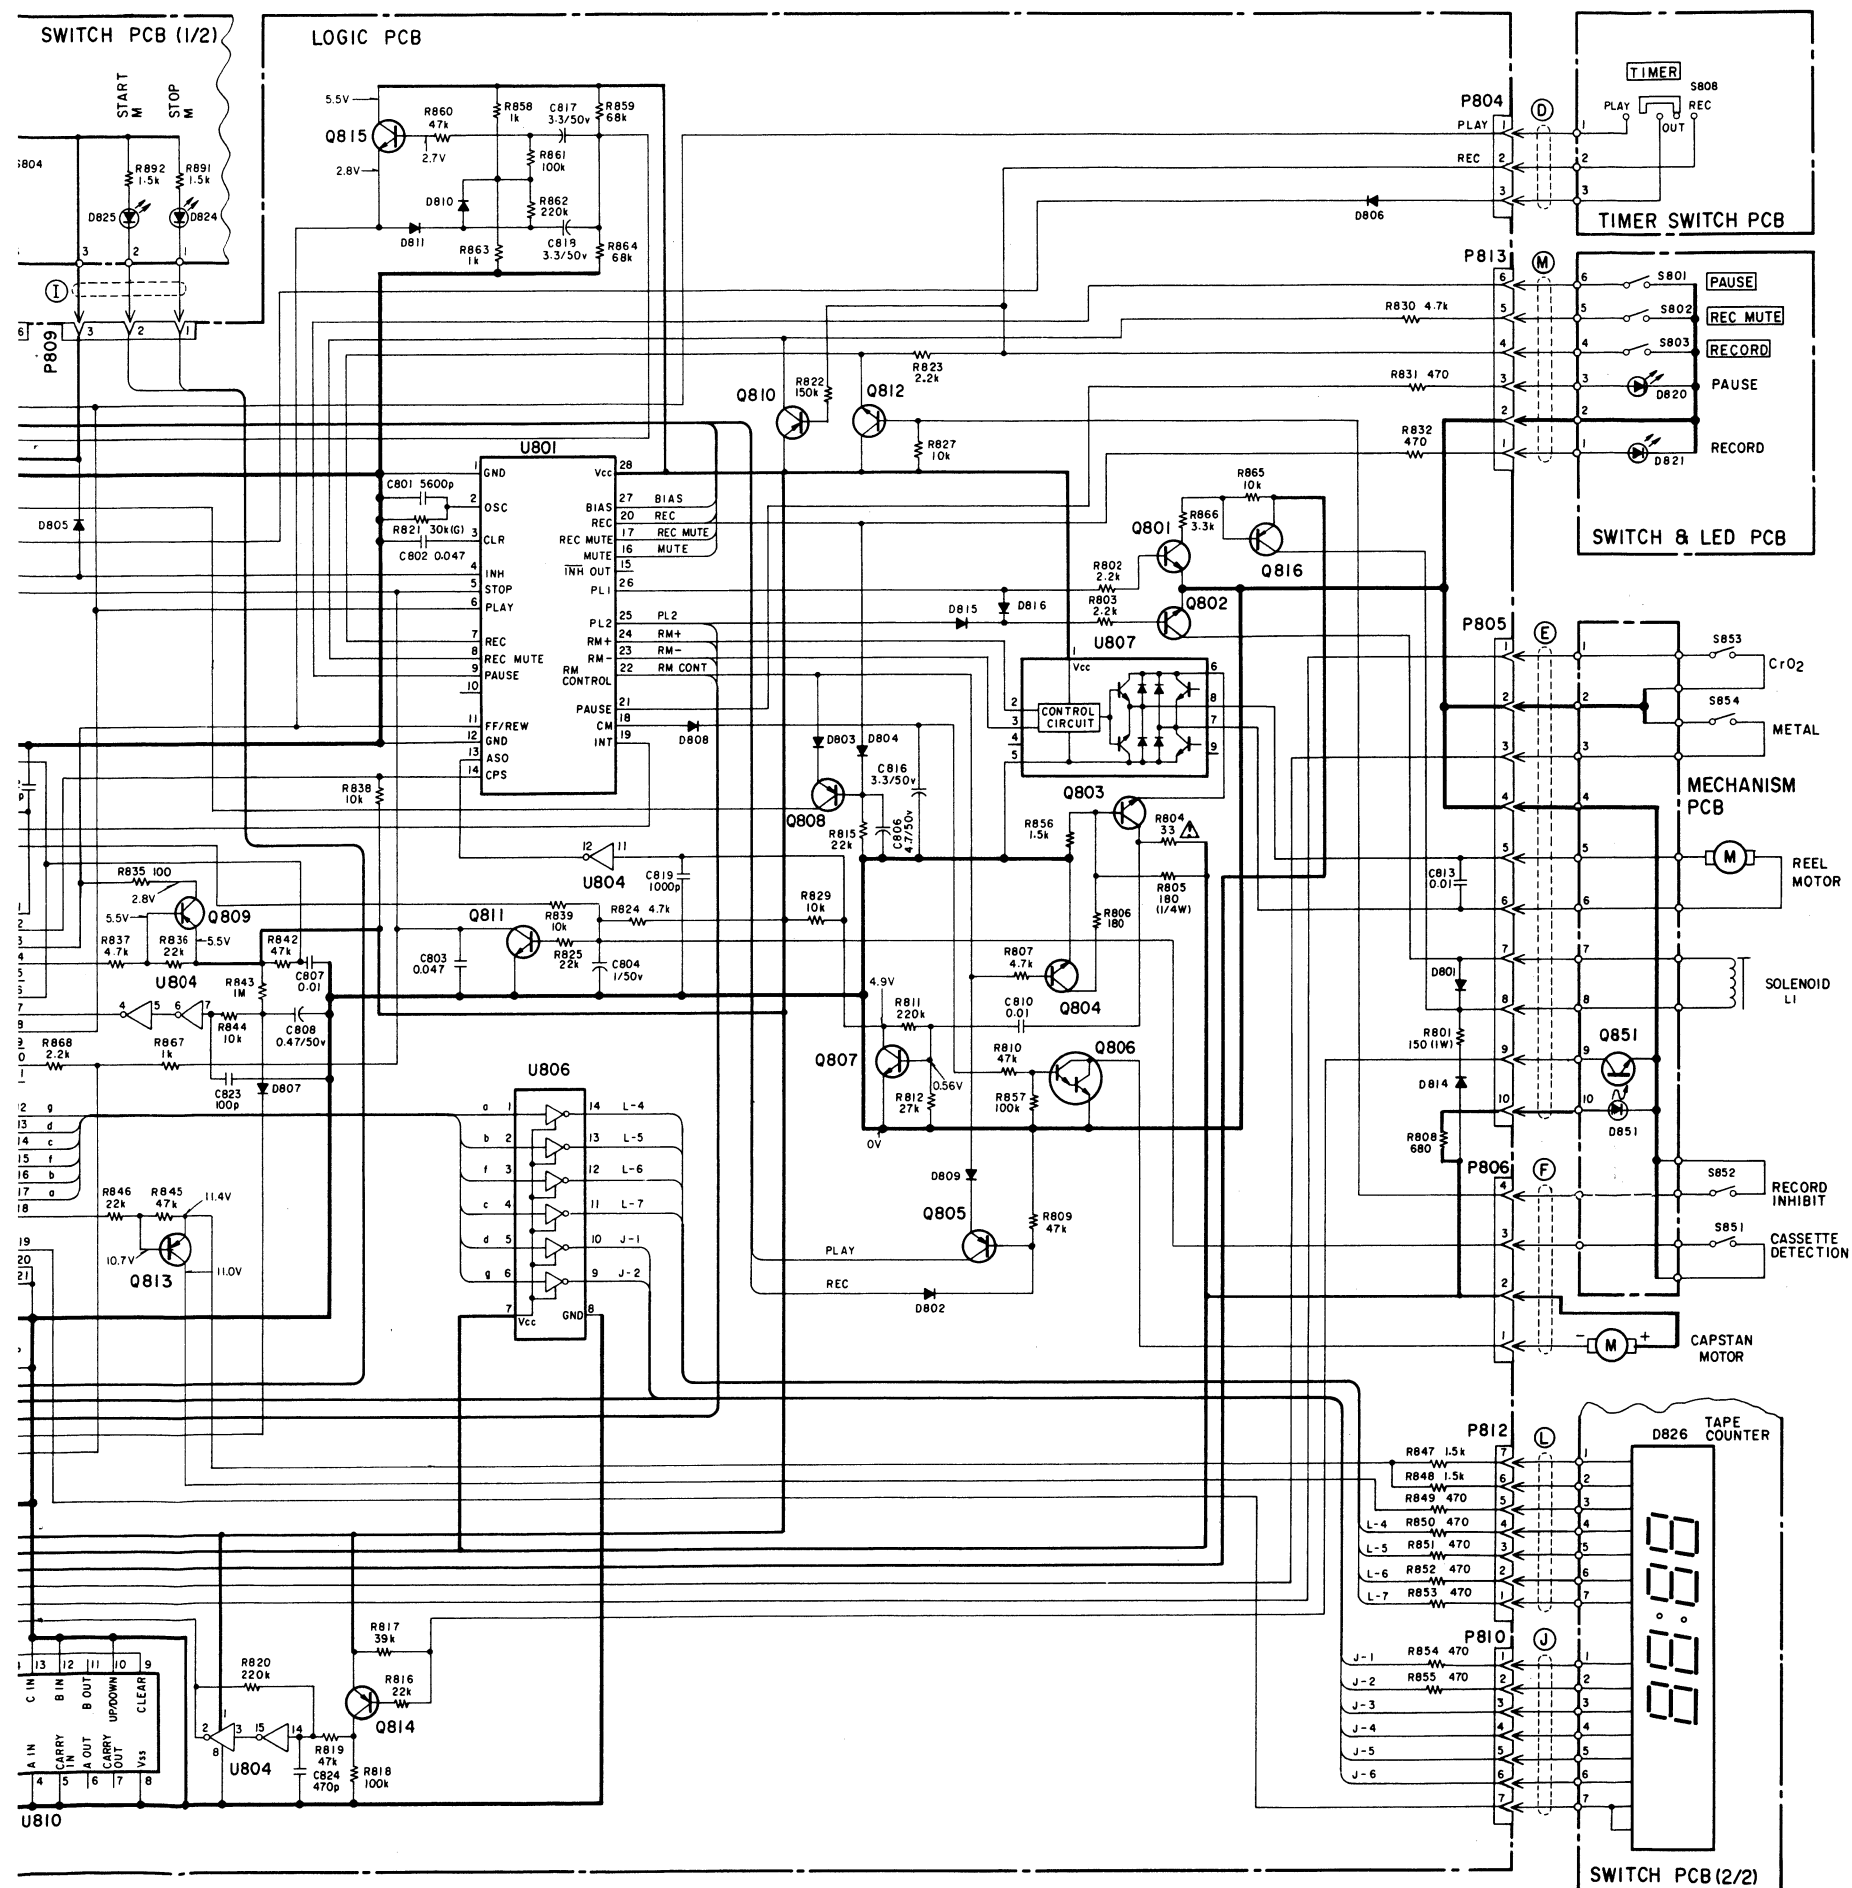

U801---TC9310N-060  
 U802---LM6402H-431  
 U803---LC7800  
 U804---TC4049BP  
 U805---TD62305P  
 U806---TD62703P  
 U807---TA7354P  
 U808---RESISTOR ARRAY  
 U809---TC4001BP  
 U810---TC4516BP

Q801, Q802-----2SC1959  
 Q803-----2SC1627A  
 Q804, Q807, Q811, Q812, Q815, Q817---2SC1815  
 Q805, Q808~Q810, Q813, Q814---2SA1015  
 Q806-----2SD1140  
 Q816-----2SA562  
 Q851-----TPS-603-B

D801-----S5277B

D802~D816---IS2473(SSI76)  
 D826-----TLG4125 (TAPE COUNTER)  
 D823, D851-----TLR123  
 D822-----TLG23A  
 D824, D825-----TLR205

Q801	
E	14.5~19.0V
C	PLAY START L PULSE
B	PLAY START REC START H PULSE

Q803	
E	PLAY, REC, REC MUTE 4.7V
C	FF, REW 9.5V
B	PLAY, REC, REC MUTE 9.6V
	FF, REW 10.7V
	OTHERS 11.4V
B	PLAY, REC, REC MUTE 5.4V
	OTHERS 10.3V

Q808	
E	PLAY, PLAY PAUSE 4.0V
C	REC, REC PAUSE 4.6V
B	REC MUTE 0V
C	PLAY, PLAY PAUSE 4.0V
B	REC, REC PAUSE 1.4V
	REC MUTE 0V
B	PLAY, PLAY PAUSE 3.4V
	REC, REC PAUSE 4.2V
	REC MUTE 0V
	OTHERS 0V

Q810	
E	14.5~19.0V
C	REC MUTE KEY IN 0.3V
B	REC KEY IN 4.9V
	OTHERS 5.4V

Q811	
E	0V
C	WITHOUT CASSETTE 0V
B	STOP KEY IN 0V
	WITHOUT CASSETTE 0.7V
	WITH CASSETTE 5.5V
	OTHERS 0V

Q812	
E	5.5V
C	5.5V
B	WITH CASSETTE TABS REMOVED or WITHOUT CASSETTE 5.5V
	OTHERS 0V

Q816	
E	14.5~19.0V
C	PLAY, REC, REC MUTE 2.4V
B	VARIES WITH VOLTAGE VARIATIONS
	OTHERS 11.2V

U801	
1	0V
2	3.6V
3	2.2V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V
10	5.5V
11	5.5V
12	5.5V
13	5.5V
14	5.5V
15	5.5V
16	5.5V
17	5.5V
18	5.5V
19	5.5V
20	5.5V
21	5.5V
22	5.5V
23	5.5V
24	5.5V
25	5.5V
26	5.5V
27	5.5V
28	5.5V

U802	
1	1.9V
2	0V
3	2.8V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V
10	5.5V
11	5.5V
12	5.5V
13	5.5V
14	5.5V
15	5.5V
16	5.5V
17	5.5V
18	5.5V
19	5.5V
20	5.5V
21	5.5V
22	5.5V
23	5.5V
24	5.5V
25	5.5V
26	5.5V
27	5.5V
28	5.5V

U803	
1	5.5V
2	5.5V
3	5.5V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V
10	5.5V
11	5.5V
12	5.5V
13	5.5V
14	5.5V
15	5.5V
16	5.5V
17	5.5V
18	5.5V
19	5.5V
20	5.5V
21	5.5V
22	5.5V
23	5.5V
24	5.5V
25	5.5V
26	5.5V
27	5.5V
28	5.5V

U805	
1	3.8V
2	3.8V
3	3.8V
4	3.8V
5	3.8V
6	3.8V
7	3.8V
8	3.8V
9	3.8V
10	3.8V
11	3.8V
12	3.8V
13	3.8V
14	3.8V
15	3.8V
16	3.8V

U809	
1	0V
2	0V
3	5.5V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V
10	5.5V
11	5.5V
12	5.5V
13	5.5V
14	5.5V
15	5.5V
16	5.5V

U810	
1	0V
2	0V
3	0V
4	0V
5	0V
6	PULSE or 0V
7	PULSE or 0V
8	0V
9	5.5V
10	5.5V
11	PULSE or 0V
12	0V
13	0V
14	PULSE or 0V
15	PULSE or 0V
16	5.5V

U804	
1	5.5V
2	5.5V
3	5.5V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V
10	5.5V
11	5.5V
12	5.5V
13	5.5V
14	5.5V
15	5.5V
16	5.5V

U807	
1	5.5V
2	5.5V
3	5.5V
4	5.5V
5	5.5V
6	5.5V
7	5.5V
8	5.5V
9	5.5V

Q804	
E	0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V

Q805	
E	0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V

Q806	
E	0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V
C	PLAY, REC, REC MUTE 4.3V
B	PLAY PAUSE, REC PAUSE 4.6V
	OTHERS 0V

Q814	
E	5.5V
C	5.5V
B	5.5V

**V-530X**  
 Control Section

2nd Edition: September 1984

# TEAC SCHEMATIC DIAGRAM (Amplifier Section) V-530X


A

B

C

D

E

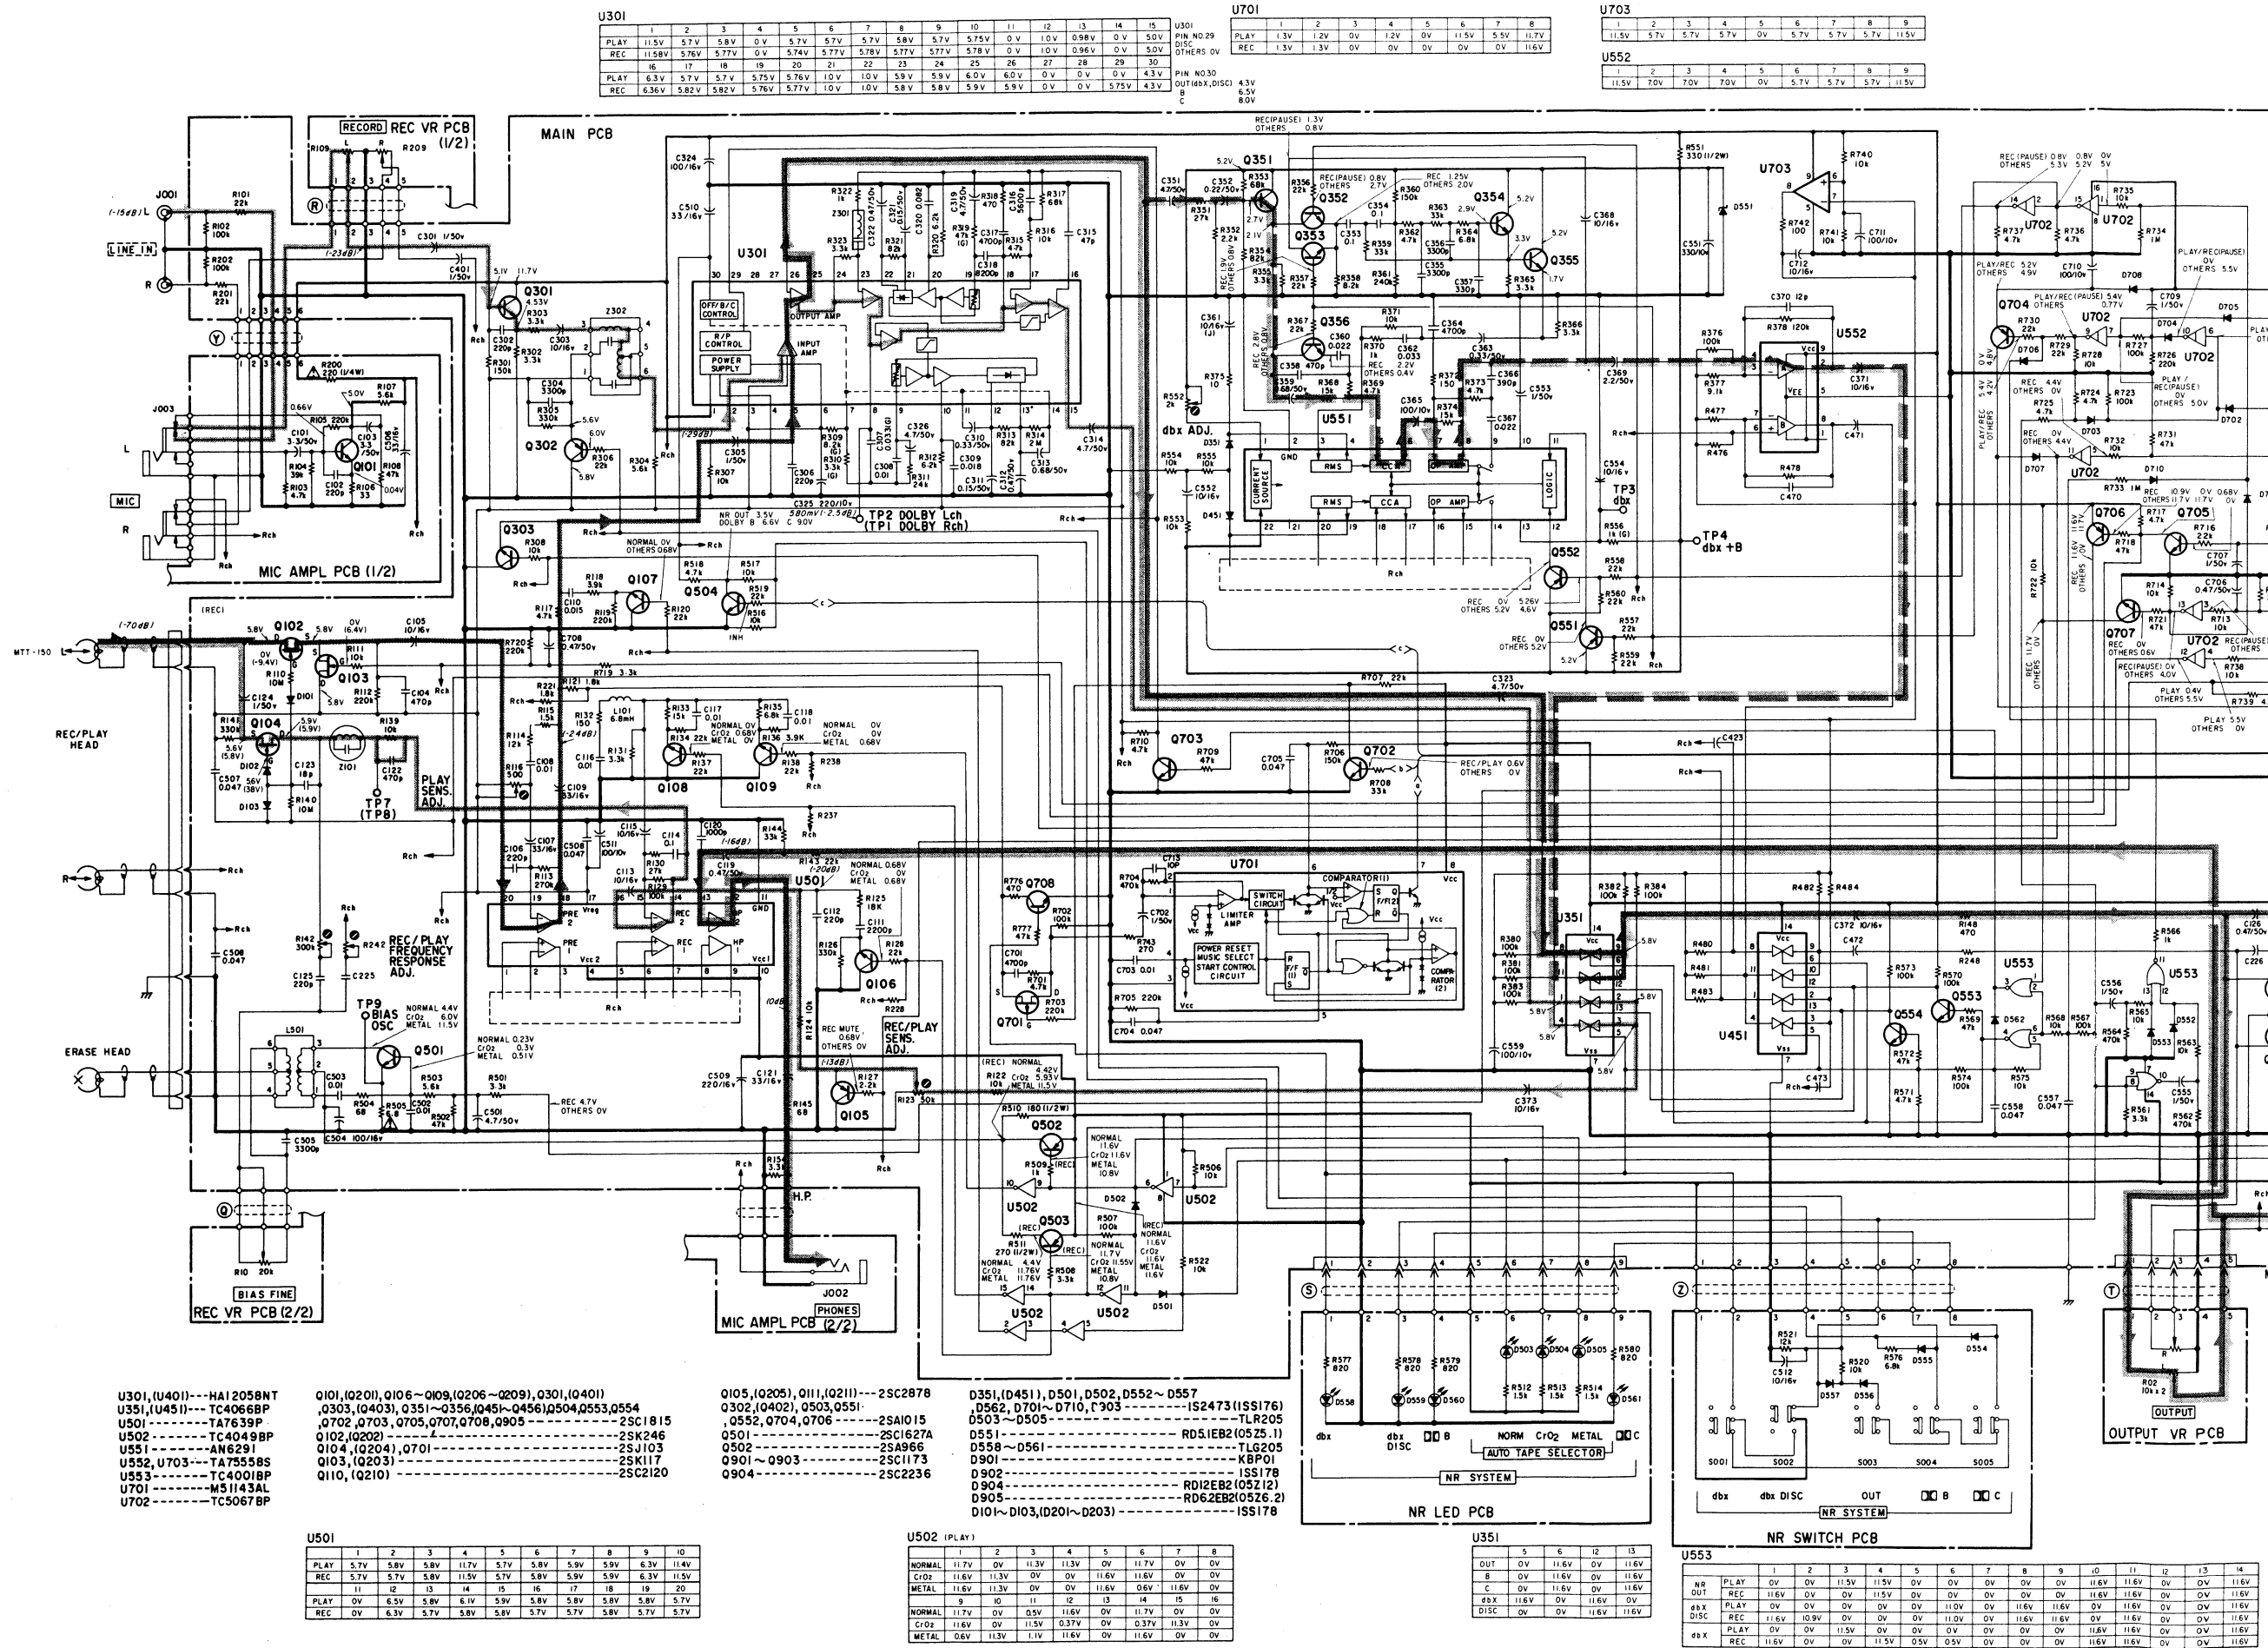

U301, (U401)---HA12058NT  
 U351, (U451)---TC4066BP  
 U501---TA7639P  
 U551---TC4049BP  
 U552, U703---AN6291  
 U553---TA7555BS  
 U701---TC4001BP  
 U702---MS1143AL  
 U702---TC5067BP

Q101, (Q201), Q106~Q109, (Q206~Q209), Q301, (Q401)  
 Q303, (Q403), Q351~Q356, (Q451~Q456), Q504, Q553, Q554  
 Q702, Q703, Q705, Q707, Q708, Q905---2SC1815  
 Q102, (Q202)---2SC1627A  
 Q104, (Q204), Q701---2SJ103  
 Q103, (Q203)---2SK117  
 Q110, (Q210)---2SC2120

Q105, (Q205), Q111, (Q211)---2SC2878  
 Q302, (Q402), Q503, Q551  
 Q552, Q704, Q706---2SA1015  
 Q501---2SC1627A  
 Q502---2SA966  
 Q901~Q903---2SK117  
 Q904---2SC2236

Q351, (Q451), D501, D502, D552~D557  
 D562, D701~D710, R303---IS2473 (ISS176)  
 D503~D505---TLR205  
 D551---RD51EB2 (0525.1)  
 D558~D561---TLG205  
 D901---KBP01  
 D902---ISS178  
 D904---RD12EB2 (05212)  
 D905---RD62EB2 (0526.2)  
 D101~D103, (D201~D203)---ISS178

U501

	1	2	3	4	5	6	7	8	9	10
PLAY	5.7V	5.8V	5.8V	11.7V	5.7V	5.8V	5.9V	5.9V	6.3V	11.6V
REC	5.7V	5.7V	5.8V	11.5V	5.7V	5.8V	5.9V	5.9V	6.3V	11.5V
PLAY	0V	6.5V	5.8V	6.1V	5.9V	5.8V	5.8V	5.8V	5.7V	5.7V
REC	0V	6.3V	5.7V	5.8V	5.8V	5.7V	5.7V	5.8V	5.7V	5.7V

U502 (PLAY)

	1	2	3	4	5	6	7	8
NORMAL	11.7V	0V	11.3V	11.3V	0V	11.7V	0V	0V
CR2	11.6V	11.3V	0V	0V	11.6V	11.6V	0V	0V
METAL	11.6V	11.3V	0V	0V	11.6V	0.6V	11.6V	0V
9	10	11	12	13	14	15	16	
NORMAL	11.7V	0V	0.5V	11.6V	0V	11.7V	0V	0V
CR2	11.6V	0V	11.5V	0.37V	0V	0.37V	11.3V	0V
METAL	0.6V	11.3V	11V	11.6V	0V	11.6V	0V	0V

U351

	1	2	3	4	5	6	7	8	9	10	11	12	13
OUT	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V
B	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V
CR	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V
dbx	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V
DISC	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V	11.6V	0V

U553

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
NR	PLAY	0V	0V	11.5V	11.5V	0V	0V	0V	0V	11.6V	11.6V	0V	0V	11.6V
dbx	PLAY	0V	0V	0V	0V	11.0V	0V	0V	0V	11.6V	11.6V	0V	0V	11.6V
REC	11.6V	0V	0V	0V	0V	0V	0V	0V	0V	11.6V	11.6V	0V	0V	11.6V
dbx	PLAY	0V	0V	11.5V	0V	0V	0V	0V	0V	11.6V	11.6V	0V	0V	11.6V
REC	11.6V	0V	0V	11.5V	0.5V	0.5V	0V	0V	0V	11.6V	11.6V	0V	0V	11.6V





**U703**

1	2	3	4	5	6	7	8	9
11.5V	5.7V	5.7V	5.7V	0V	5.7V	5.7V	5.7V	11.5V

**U552**

1	2	3	4	5	6	7	8	9
11.5V	7.0V	7.0V	7.0V	0V	5.7V	5.7V	5.7V	11.5V



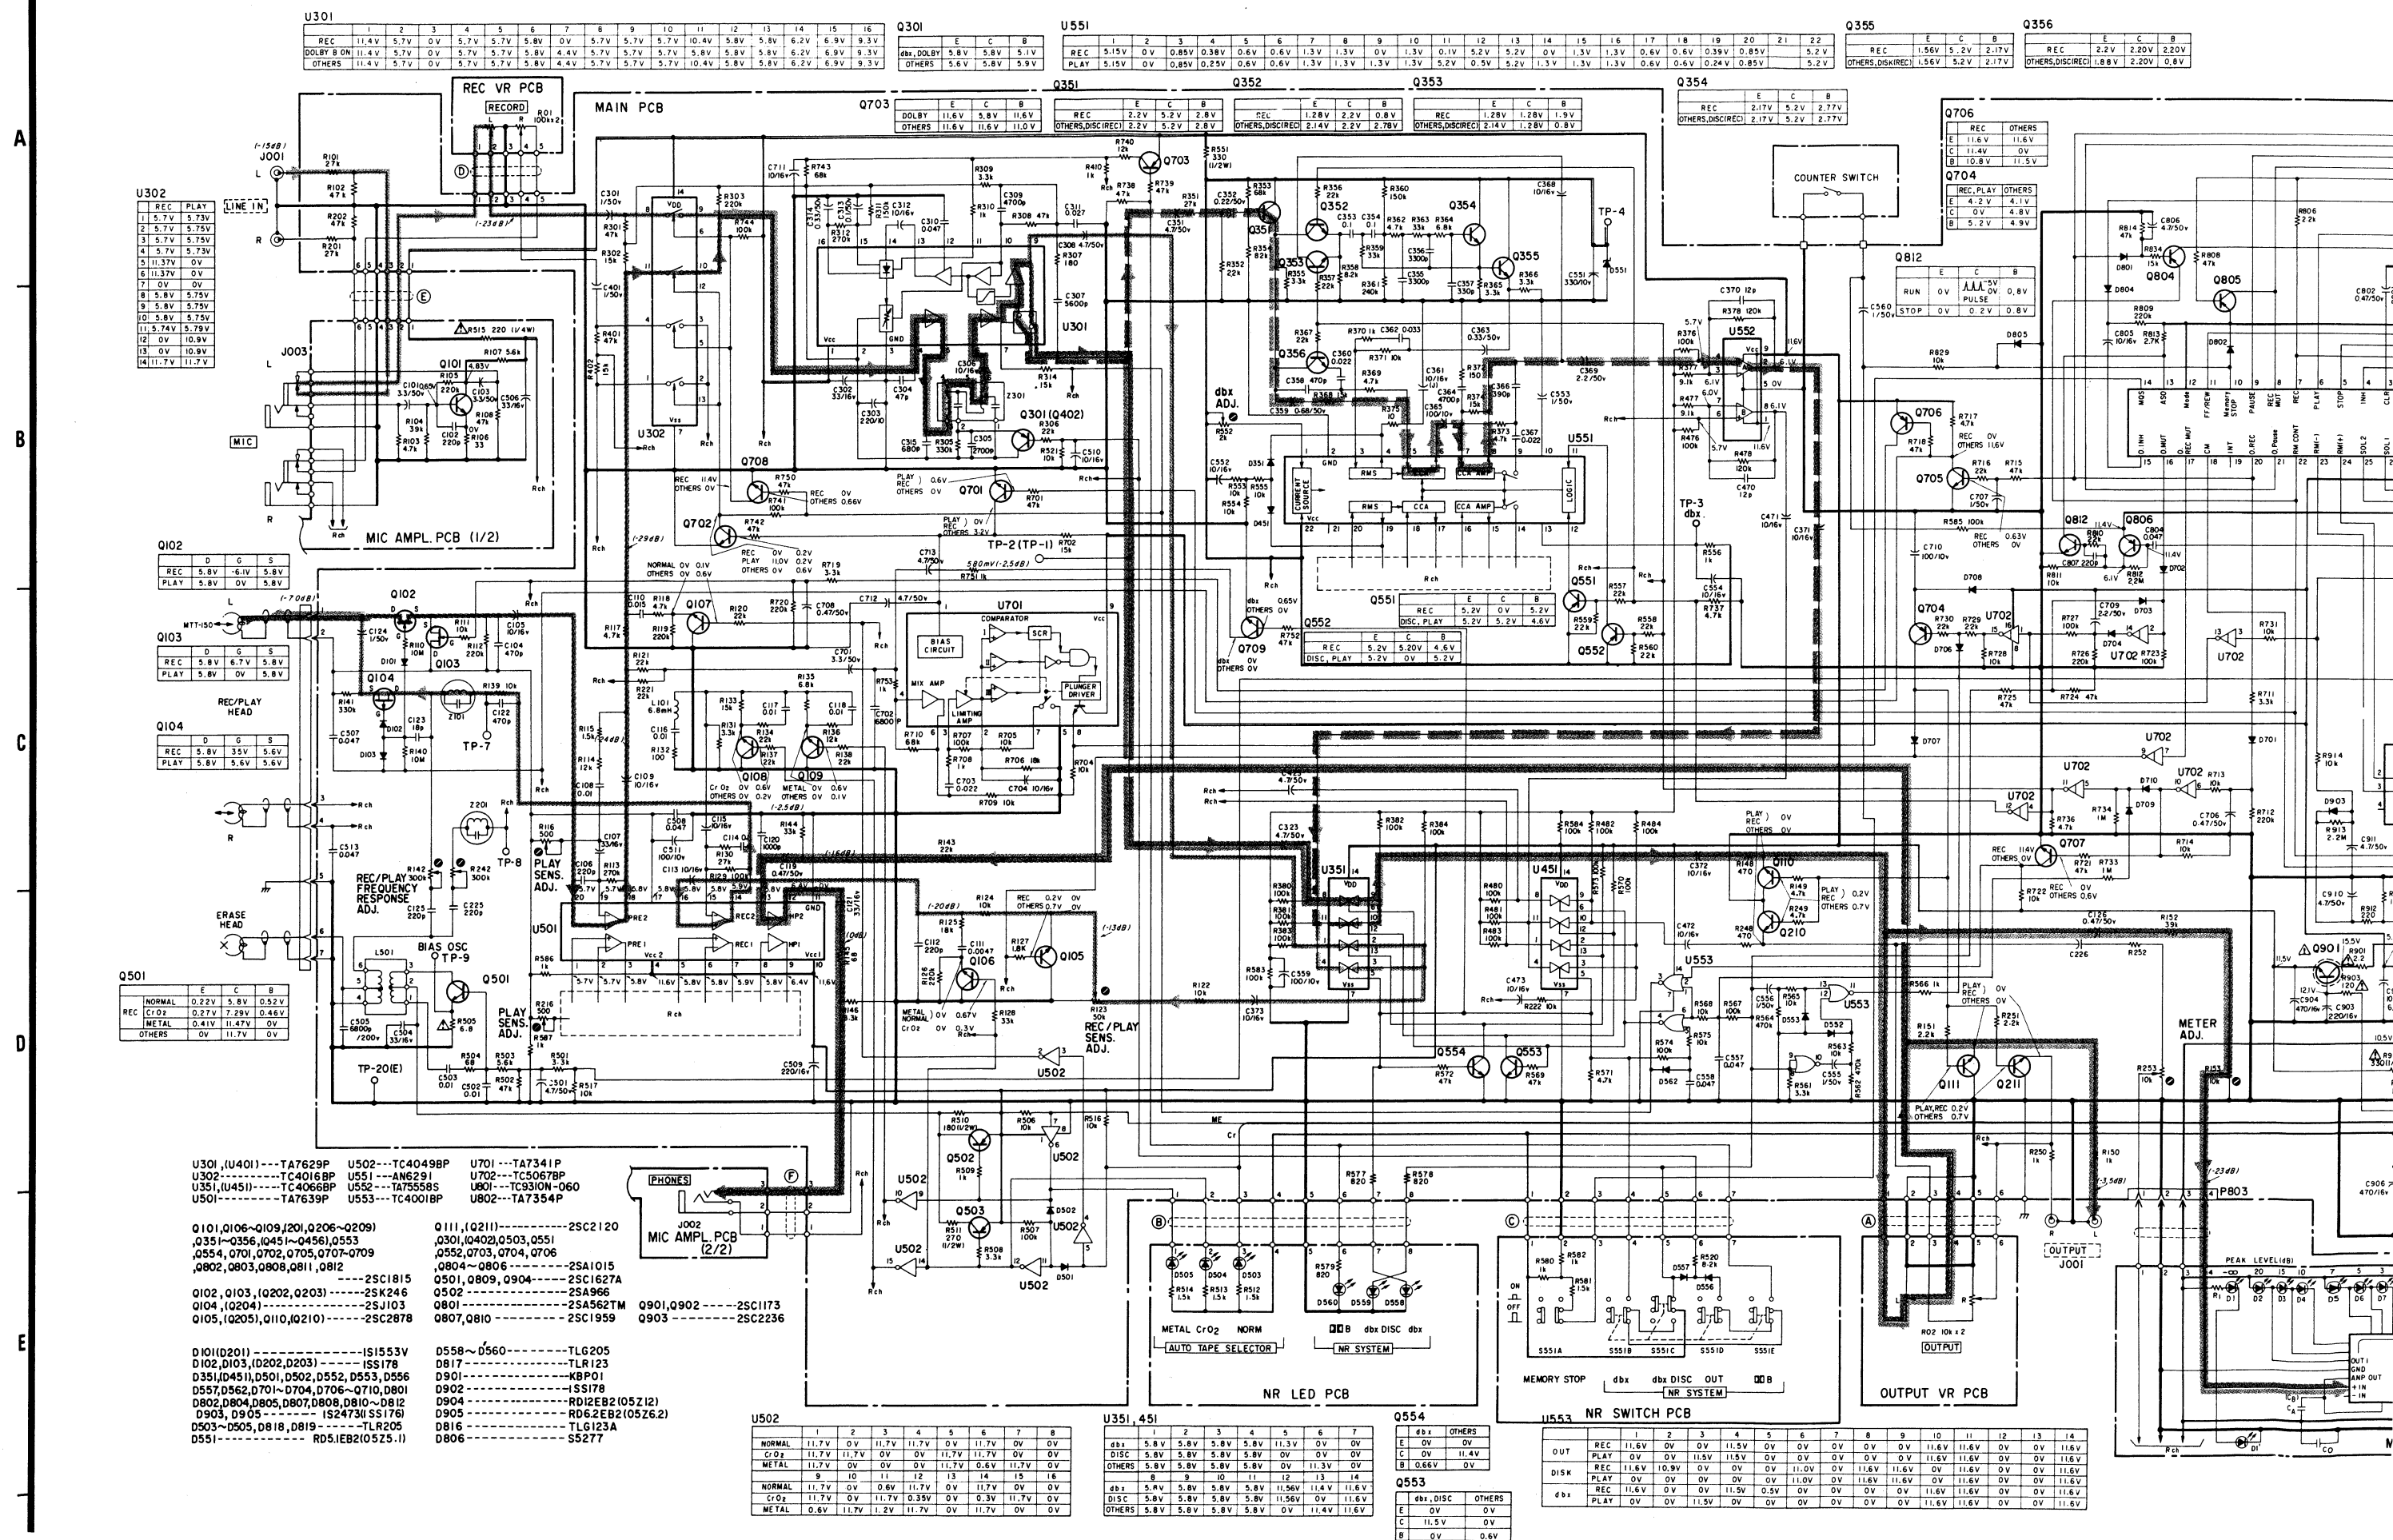

0 V
2.8 V
5.5 V

5.5V
5.5V
OTHERS 5.5V
5.5V
5.5V

